



7		8	
REV.	ECN NO.	REVISED	DATE

- NOTE:
1. MATERIAL:
- a. HOUSING:PPA
 - b. CONTACT:PHOSPHOR BRONZE
(SURFACE PLATING: Au*μ")
SEE ORDERING INFORMATION
2. ELECTRIC:
- a. CONTACT RESISTANCE: 30 MILLIOHMS MAX
 - b. INSULATION RESISTANCE: 1000 MEGA OHMS MIN
 - c. DIELECTNIC VOLTAGE: 500V AC ONE SEC LEVEL
 - d. OPERATING TEMPERATURE: -25° C~ +85° C

ORDERING INFORMATION

BS-08-B***014





电池座系列

BS-8系列

SMT 180° TYPE

PLATING:
A-Au1U"
J-Ni100U"~120U"
K-SN100U"~120U"

MATERIAL:
1A-PBT BLACK
1B-PA66 BLACK
2A-PPA BROWN
2B-PPA BLACK
3A-PPS BROWN
3B-PPS BLACK
4A-LCP WHITE
4B-LCP BLACK

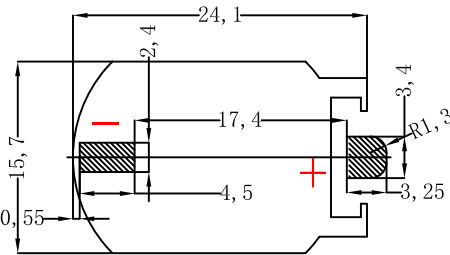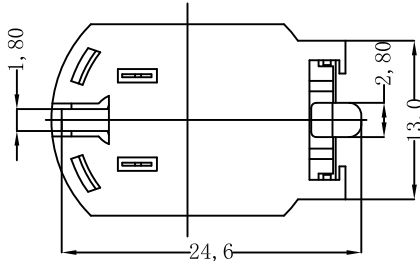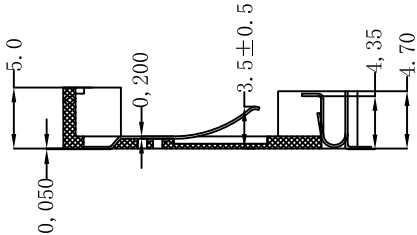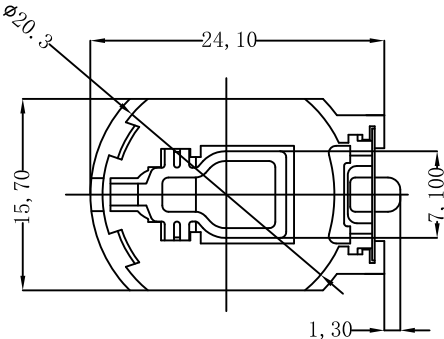

PCB Layout Diagram
Top View

3	TERMINAL (-)	1	PHOSPHOR BRONZE, T=0.20MM	Gold Plating and Ni Under-Plating
2	TERMINAL (+)	1	PHOSPHOR BRONZE, T=0.20MM	Gold Plating and Ni Under-Plating
1	HOUSING	1	PPA	BLACK
NO.	PART NAME	Q' TY	MATERIAL	PLATING & COLOR

UNLESS OTHERWISE SPECIFIED TOLERANCES

DECIMALS: X :±0.30 X.X :±0.25 X.XX :±0.20 X.XXX :±0.10

ANGLES: X :±1° X.X :±0.5°

WEIGHT: 0.9 g

SHEET 1 OF 1

淮 洋 有 限 公 司 HUAI YANG CO., LTD.

SCALE: 1:1

SIZE: A4

VIEW: ⑩

PART NO: BS-08-B2BA014

UNIT: mm

REV.: A/O

OBJECT: MY

DSND YangFeng

DATE 2016. 11. 17

CHKD ZhouRuicai

DATE 2016. 11. 17

APVD XueZhengy

DATE 2016. 11. 17

TITLE: BS-2032-8 常规端子5MM SMT