
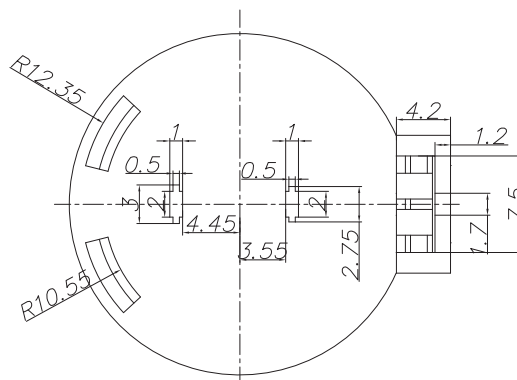


REV.	MATTER	APP.	DATE
A			

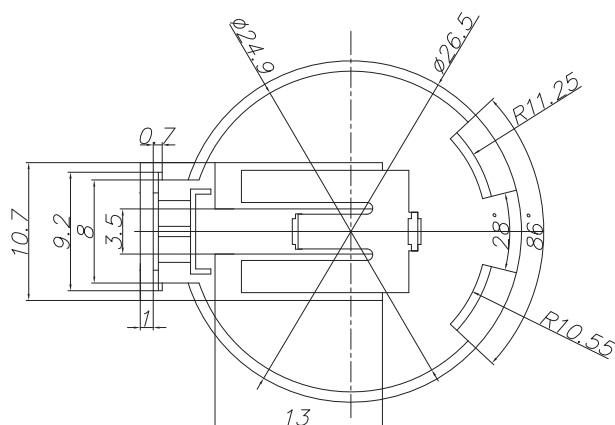

NOTE:
 1.MATERIAL:
 a.HOUSING:THERMOPLASTIC GLASS FIBRE UL94V-0
 b.CONTACT:PHOSPHOR BRONZE
 (SURFACE PLATING: Ni100u")
 SEE ORDERING INFORMATION
 2.ELECTRIC:
 a.CONTACT RESISTANCE: 30 MILLIOHMS MAX
 b.INSULATION RESISTANCE: 1000 MEGA OHMS MIN
 c.DIELECTRIC VOLTAGE: 750V AC ONE SEC LEVEL
 d.OPERATING TEMPERATURE: -55°C~ +85°C

ORDERING INFORMATION

BS-24-A**0*002

电池座系列


BS-24系列

DIP 90° TYPE


MATERIAL:
 1A-PBT WHITE
 1B-PBT BLACK
 2A-PA66 WHITE
 2B-PA66 BLACK
 3A-PA6T WHITE
 3B-PA6T BLACK

PLATING:
 J-Ni100U"~120U"
 K-Ni150U"

CRUST:
 O-WITHOUT

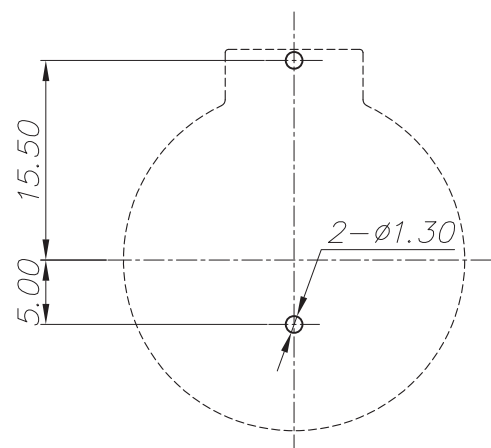

PCB Holes Diagram
Top View

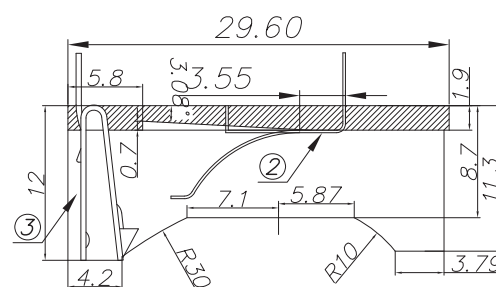

TOLERANCE		Tolerance: Unless otherwise specified			
LINEAR	ANGLE	3	TERMINL-3	PHOSPHOR BRONZE	Ni-Plated
		2	TERMINL-2	PHOSPHOR BRONZE	Ni-Plated
		1	HOUSING	PBT	BLACK
		NO.	PART NAME	MATERIAL	COLOR/FINISHED

淮 洋 有 限 公 司 HUAI YANG CO.,LTD.

TEL : 886-2-8261-8986 FAX : 886-2-8261-1885

www.hy1688.com.tw 236新北市土城區中央路二段191號10樓之5

日期DATE	单位UNITS	审核CHECK	BATTERY HDLDER	PART NO.
2009.9.28	mm	周瑞才		BS-24-A1B0J002
比例SCALE	制图 DRAW	设计DESIGN	TITLE:	
1/1	杨锋	薛正勇	两PIN电池座卧式 (BS-2477-1)	