



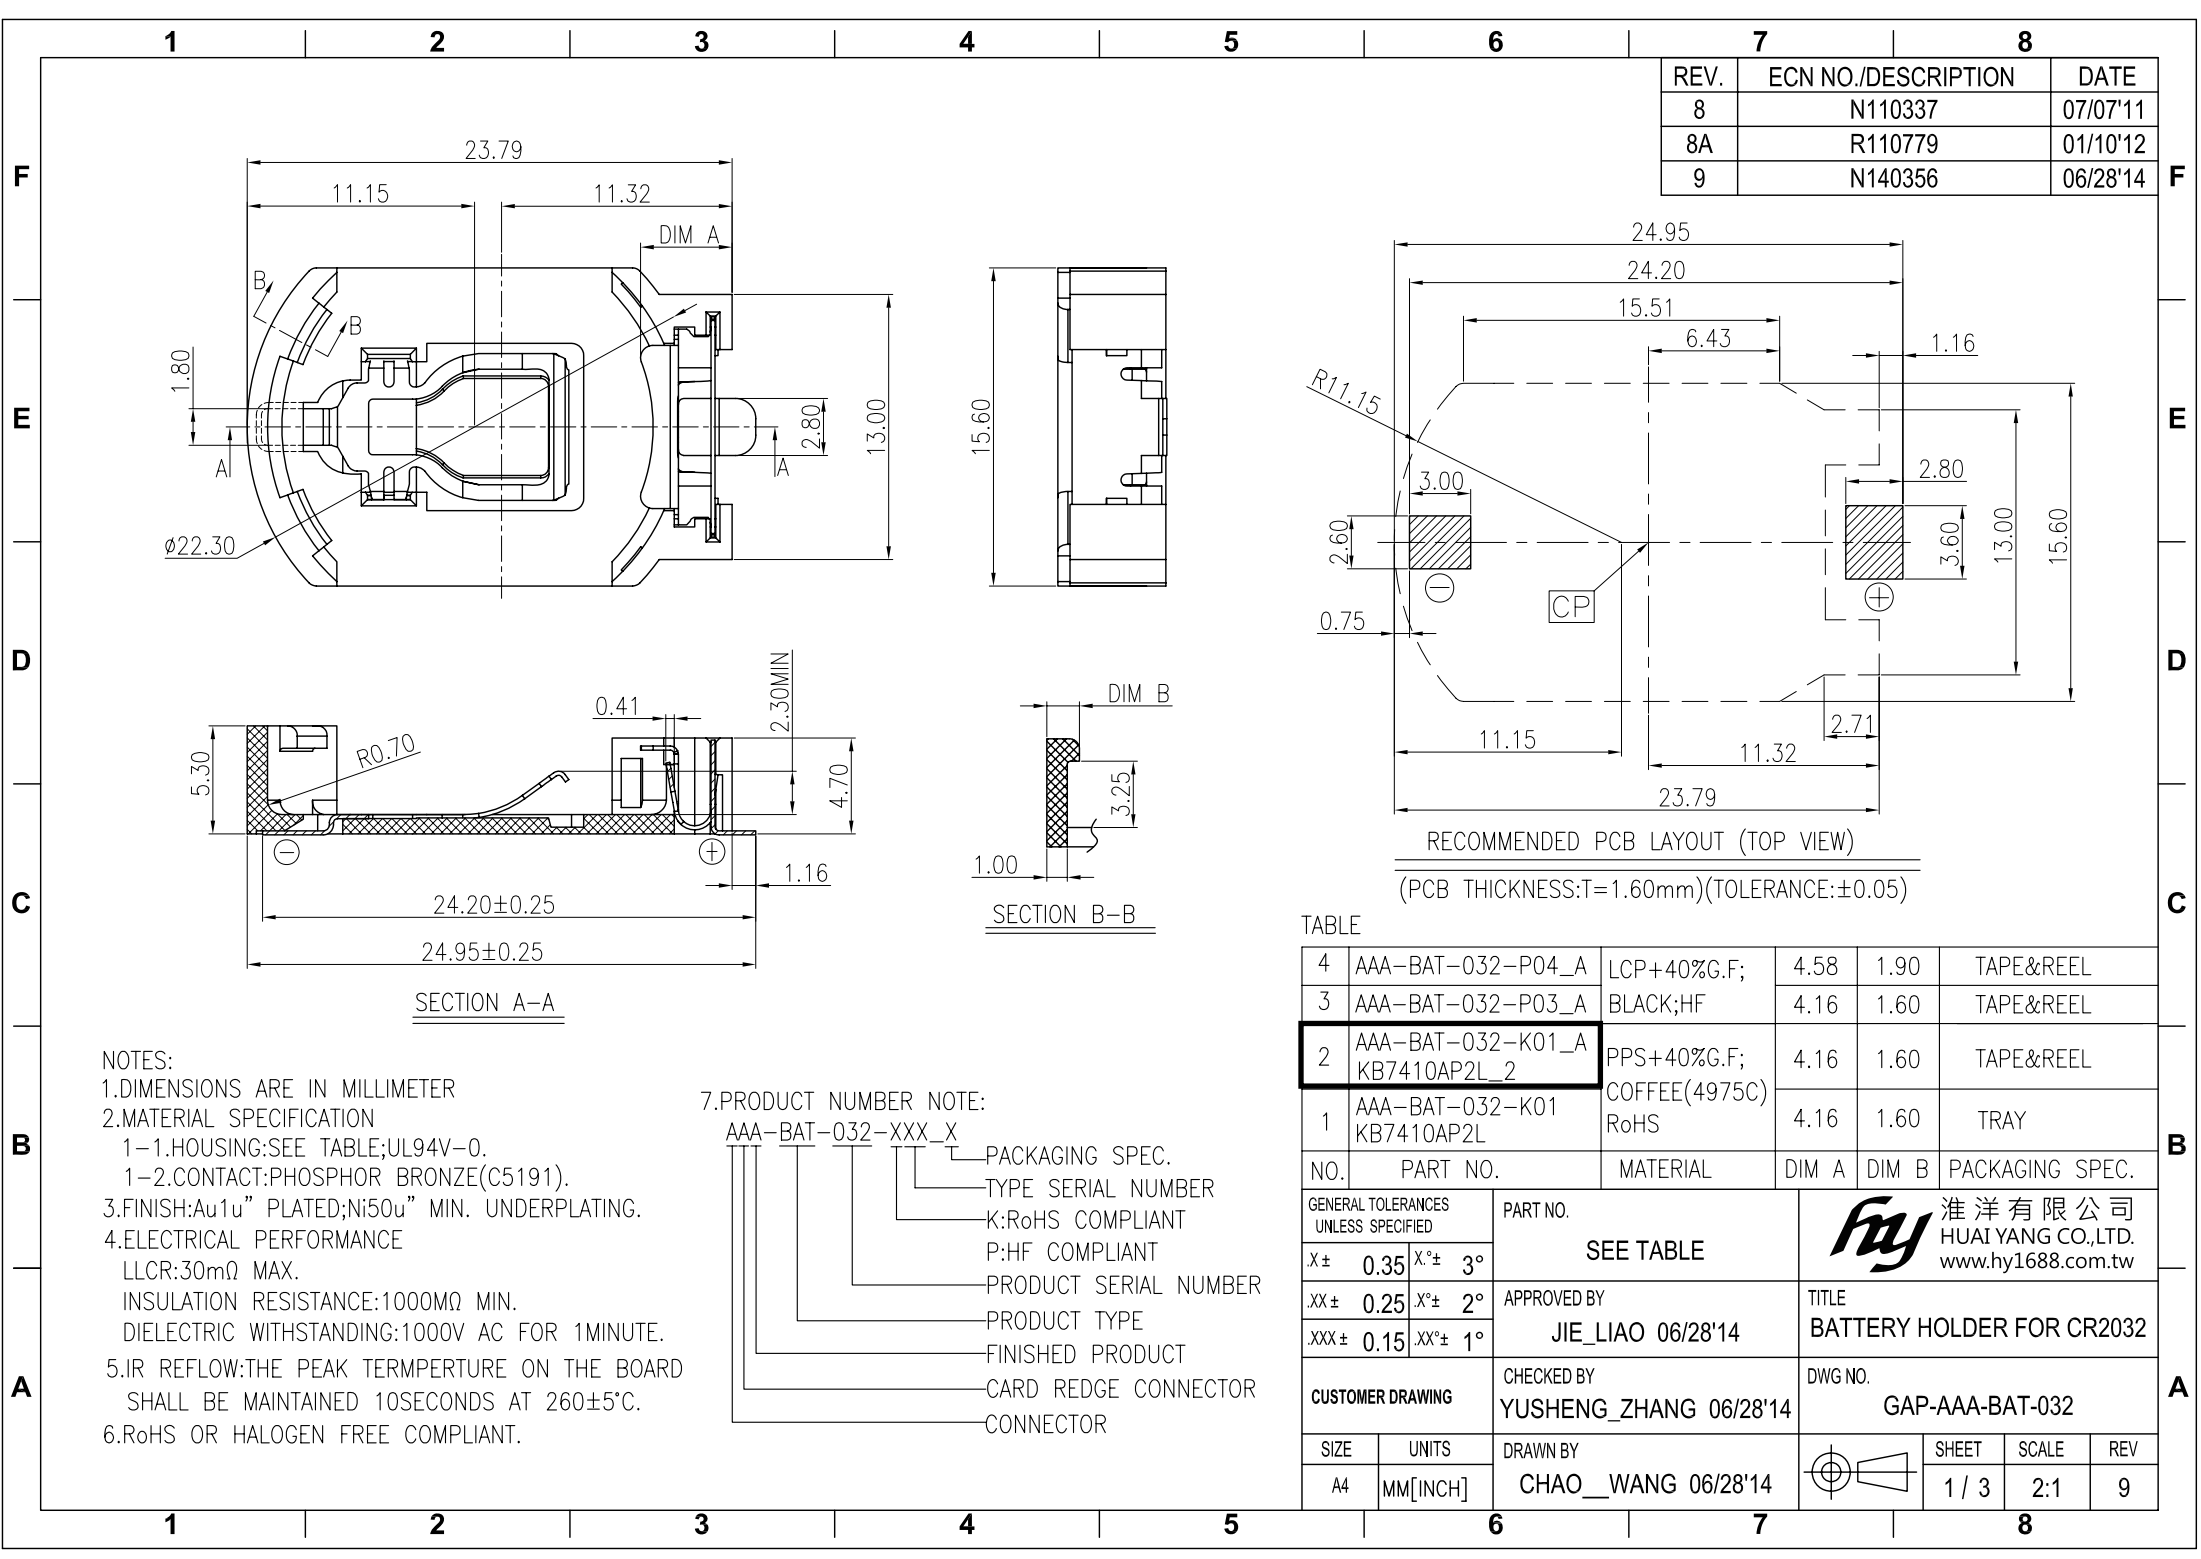

REV.	ECN NO./DESCRIPTION	DATE
8	N110337	07/07'11
8A	R110779	01/10'12
9	N140356	06/28'14

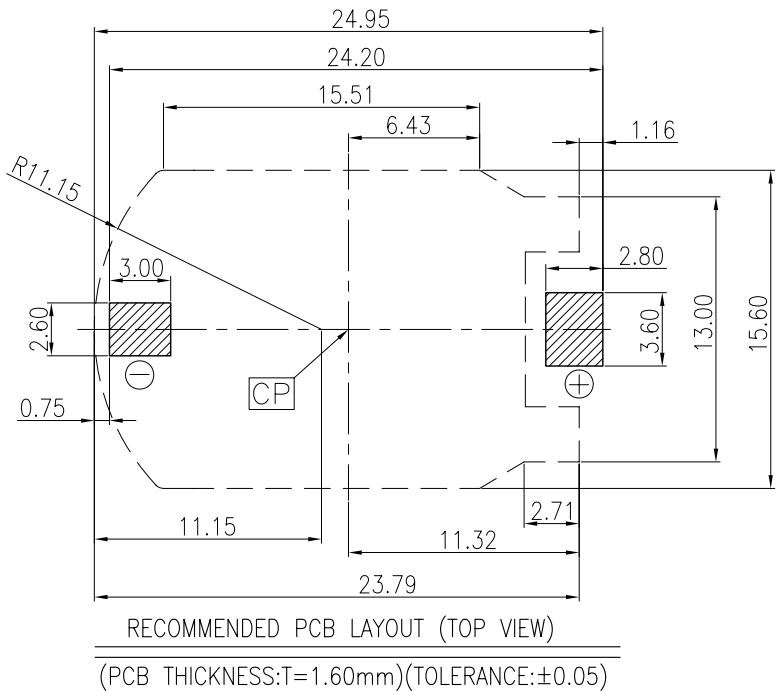

4	AAA-BAT-032-P04_A	LCP+40%G.F;	4.58	1.90	TAPE&REEL
3	AAA-BAT-032-P03_A	BLACK;HF	4.16	1.60	TAPE&REEL
2	AAA-BAT-032-K01_A KB7410AP2L_2	PPS+40%G.F; COFFEE(4975C)	4.16	1.60	TAPE&REEL
1	AAA-BAT-032-K01 KB7410AP2L	RoHS	4.16	1.60	TRAY
NO.	PART NO.	MATERIAL	DIM A	DIM B	PACKAGING SPEC.
GENERAL TOLERANCES UNLESS SPECIFIED		PART NO.	准洋有限公司 HUAI YANG CO.,LTD. www.hy1688.com.tw SEE TABLE APPROVED BY JIE_LIAO 06/28'14 TITLE BATTERY HOLDER FOR CR2032		
X±	0.35	X°±			
.XX±	0.25	X°±			
.XXX±	0.15	.XX°±			
CUSTOMER DRAWING		CHECKED BY	DWG NO.		
		YUSHENG_ZHANG 06/28'14	GAP-AAA-BAT-032		
SIZE	UNITS	DRAWN BY			
A4	MM[INCH]	CHAO_WANG 06/28'14			
				SHEET	SCALE
				1 / 3	2:1
					REV
					9

NOTES:
1.DIMENSIONS ARE IN MILLIMETER
2.MATERIAL SPECIFICATION
1-1.HOUSING:SEE TABLE;UL94V-0.
1-2.CONTACT:PHOSPHOR BRONZE(C5191).
3.FINISH:AU1u" PLATED;Ni50u" MIN. UNDERPLATING.
4.ELECTRICAL PERFORMANCE
LLCR:30mΩ MAX.
INSULATION RESISTANCE:1000MΩ MIN.
DIELECTRIC WITHSTANDING:1000V AC FOR 1MINUTE.
5.IR REFLOW:THE PEAK TERMPERTURE ON THE BOARD
SHALL BE MAINTAINED 10SECONDS AT 260±5°C.
6.RoHS OR HALOGEN FREE COMPLIANT.

7.PRODUCT NUMBER NOTE:
AAA-BAT-032-XXX_X
PACKAGING SPEC.
TYPE SERIAL NUMBER
K:RoHS COMPLIANT
P:HF COMPLIANT
PRODUCT SERIAL NUMBER
PRODUCT TYPE
FINISHED PRODUCT
CARD REDGE CONNECTOR
CONNECTOR