


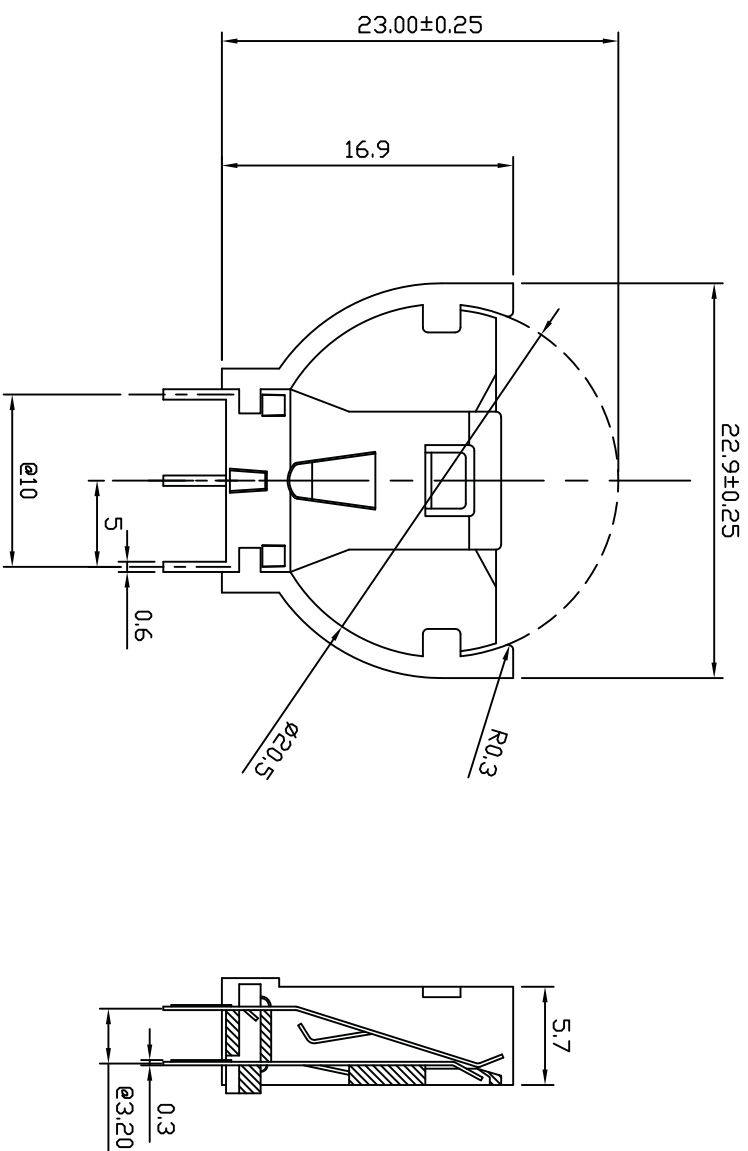

NOTE:P.C.B LAYOUT TOLERANCE:±0.05mm

HOUSING: NYLON 66 +GF (UL94V-0)
CONTACT: PHOSPHOR BRONZE
FINISH: TIN PLATED OVER NICKEL
Applicable: Battery CR 2032

BATTERY
02:D=23.5mm
T=5.0mm

PLATING
1Sn/Pb 90/10 100u" MIN
OVER 50U" MIN NICKEL
G: ROHS

			<i>NOTES</i>		淮 洋 有 限 公 司 HUAI YANG CO.,LTD. www.hyl688.com.tw	
			<i>CUSTOMER DRAWING</i>			
			General Tolerances: Angle $\pm 2^\circ$		Date: 08/23/006 Sheet 1 of 1	
A	RELEASE	07/30/006	Dim: 0.0 0.00 0.000 ± 0.25 ± 0.20 ± 0.10		DWG. NO: GS261-021X REV: A	
REV	Revision Record	Date	Drawn by	Chk'd by	Title: BATTERY HOLDER	
Revise Only On Cad System		Appr'd by		Scale	1 : 1	