


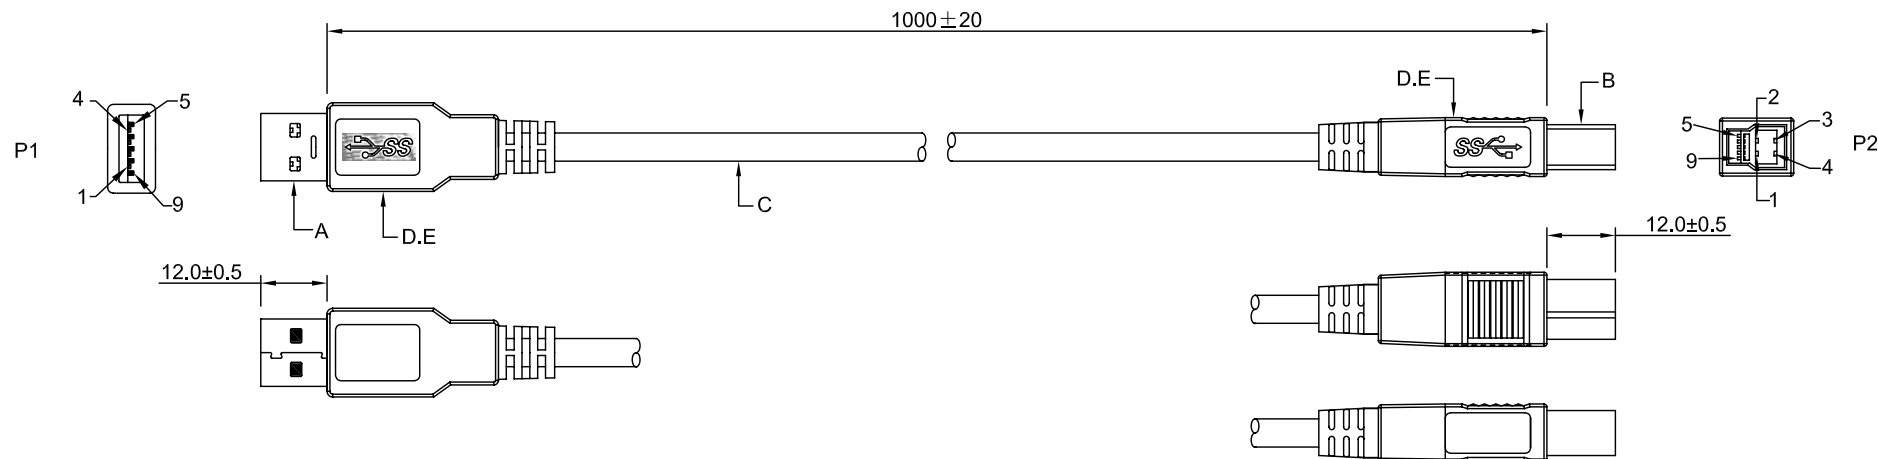


ELECTRICAL PROPERTIES :
100% OPEN & SHORT TEST
CONTACT RESISTANCE : 5Ω.
INSULATION RESISTANCE : 10MΩ. AT DC 300V


MATERIAL LIST 材料明細:

G	PACKING	200X155X0.05 (單邊)熱封PE, 箱內放防水袋	1 PCS
F	扎帶	(PVC+鐵芯) 藍色扎帶	1 PCS
E	MOLDING	PVC-45P, 藍色	g
D	錫絲	錫絲	g
C	CALBE	UL20276 (30AWG *1P+MY+AL+D)*2C + 30AWG*1P +24AWG*2C+AL+B, O.D:5.5±0.15mm 藍色外被 (OT-184) L=1000mm REV 3.0 印字	1 PCS
B	CONN	USB 3.0 "B" 公頭, 藍膠芯, 端子鍍金 15u", 鐵殼鍍鎳	1 PCS
A	CONN	USB 3.0 "A" 公頭, 藍膠芯, 端子鍍金 15u", 鐵殼鍍鎳	1 PCS
NO.	P/N	DESCRIPTION	Q'TY

PIN ASSIGNMENT:

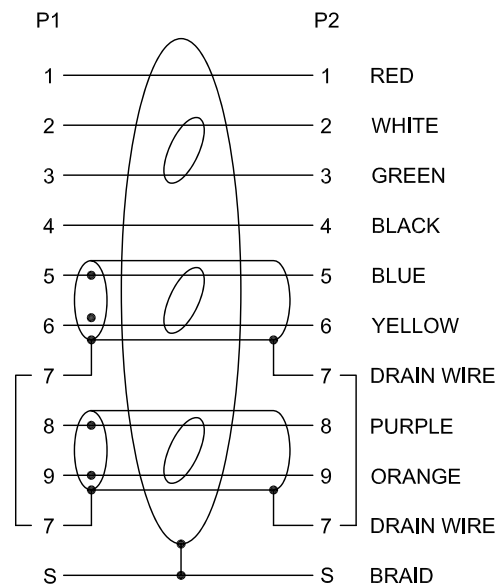

PACKING :

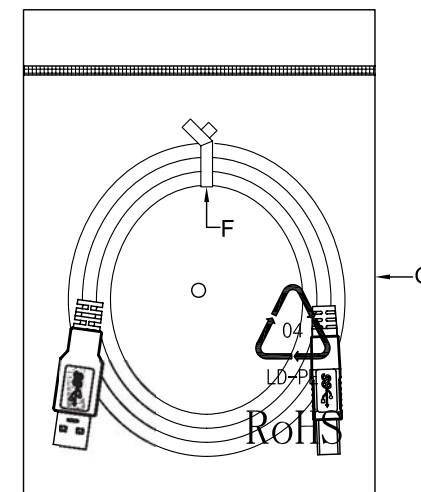

淮洋有限公司 HUAI YANG CO., LTD.
www.hy1688.com.tw TEL:886-2-82610858

GENERAL TOLERANCE

X.X	± 0.20
X.XX	± 0.15
X.XXX	± 0.05

DRAWN.

MANDY

DATE

09 - 29 - 2010

DRAWING NO.

C-W-V06007-001-R

CUSTOMER DRAWING

CHECKED.

NANCY

DATE

09 - 29 - 2010

TITLE.

USB 3.0 A/M TO USB 3.0 B/M L=1M

APPROVED.

JAMES

DATE

09 - 29 - 2010

PART NO.

W-V06007-001-R

REV

A.0

SIZE A4	UNIT mm	SCALE. NONE	SHEET. 1 OF 1	
------------	------------	----------------	------------------	--