

H312Y13-00800

MINI USB 8 PIN PLUG DUAL ROW TYPE

FEATURES AND SPECIFICATIONS

Specifications

Current rating : 0.5 A AC/DC

Voltage rating : 5 V AC

Contact resistance : 50 mΩ Max.

Insulation resistance : 100 MΩ Max.

Withstanding voltage : 100 V AC/minute



Materials


Housing : High temp. plastic , UL94V-0

Terminal : Copper Alloy

Plating : Tin selective Gold

Shell : Copper Alloy

CATALOG DRAWING (FOR REFERENCE ONLY)

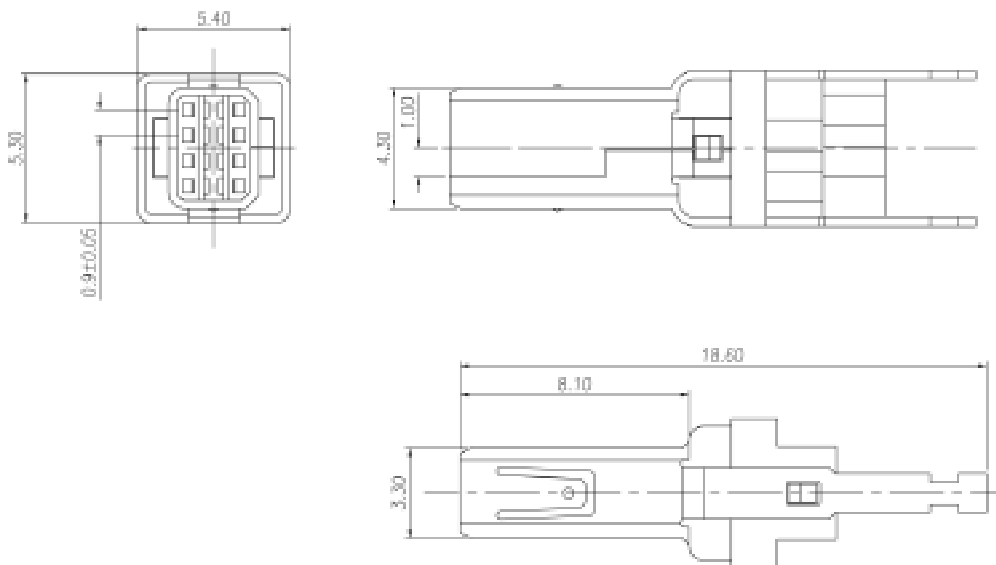

淮洋有限公司 HUAI YANG CO.,LTD.

TEL: 886-2-82610858 FAX:886-2-82611885

236 台北縣土城市中央路二段 191 號 10 樓之 5