

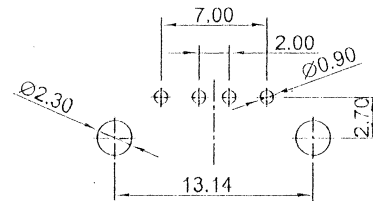
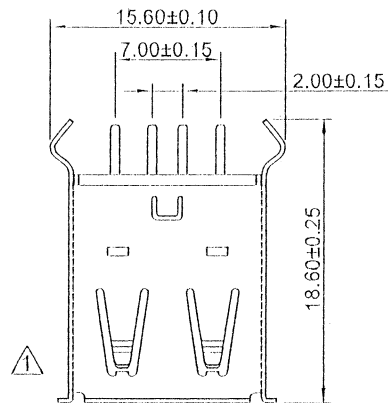


REV.	ECN.	DATE	DWN	APVD
A.1	ECN-100914-01	09/14/10	MANDY	Henry

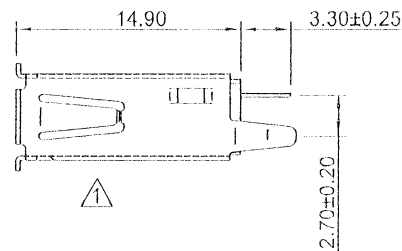

RECOMMENDED PCB LAYOUT ±0.1mm



MATERIAL:

INSULATOR : PBT, UL 94V-0.

CONTACT : COPPER ALLOY.

CONTACT FINISH : GOLD ON MATING END, TIN ON TERMINATION END,
WITH ENTIRE CONTACT NICKEL UNDERPLATED.

SHELL: COPPER ALLOY, NICKEL PLATED.

SPECIFICATION:

CURRENT RATING : 1 AMP.

DIELECTRIC WITHSTANDING VOLTAGE : 500V AC FOR 1 MINUTE.

INSULATION RESISTANCE : 1000MΩ MIN.

CONTACT RESISTANCE : 30mΩ MAX.

OPERATING TEMPERATURE : -20°C ~ +85°C.

ORDER INFORMATION :

UA11 - 04 0 1 0 B 1 4 0 - R

1 2 3 4 5 6 7 8 9 10

1. SERIES:

2. POSITION:

04=4 PIN

3. CONTACT TYPE/MATERIAL:

0=FEMALE/COPPER ALLOY

4. CONTACT PLATING:

1=SELECTIVE GOLD FLASH

6=SELECTIVE 30u" GOLD

5. INSULATOR COLOR:

0=WHITE

1=BLACK

6. INSULATOR MATERIAL:

B=PBT

7. SHELL PLATING:

1=NICKEL

8. MOUNTING OPTIONS:

4=WITH BACK COVER AND KINK

9. MATING OPTIONS:

0=STANDARD TYPE

10. GREEN PRODUCT:

R=RoHS COMPLIANT

淮洋有限公司 HUAIYANG CO., LTD.

www.hy1688.com.tw TEL:886-2-82618986

GENERAL TOLERANCE

XX ±0.25

XX ±0.20

X.XXX ±0.10

DRAWN.

TRACY

DATE

01 - 31 -2008

DRAWING NO.

C-UA0009

CUSTOMER DRAWING

CHECKED.

F. HSU

DATE

01 - 31 -2008

TITLE.

USB A SERIES STRAIGHT THRU-HOLE, JACK

APPROVED.

HENRY

DATE

01 - 31 -2008

PART NO.

UA11-040XXB140-R

REV

A.1

SIZE
A4

UNIT
mm

SCALE
2 : 1

SHEET
1 OF 1

