

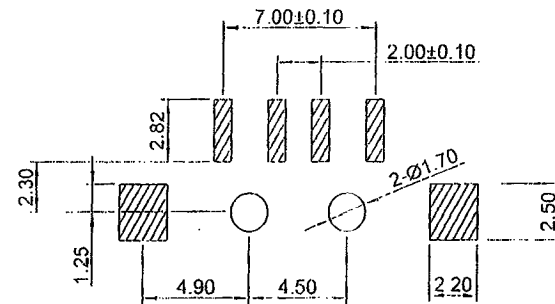
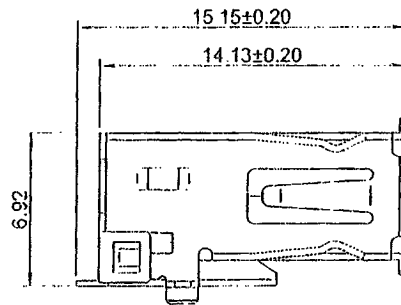


REV.	ECN.	DATE	DWN	APVD

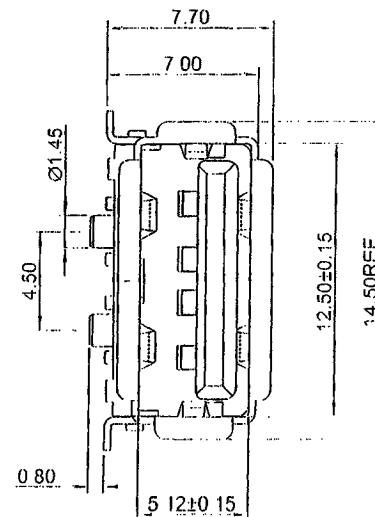

RECOMMENDED P.C.B. PATTERN LAYOUT±0.1mm

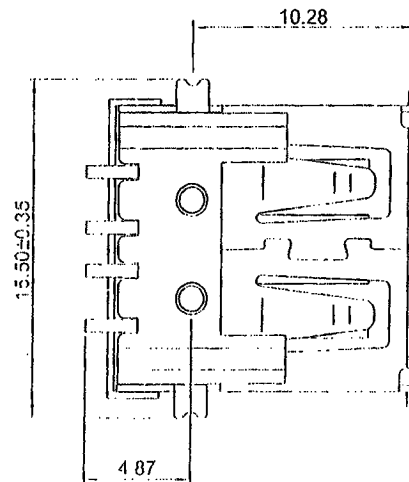

MATERIAL:

INSULATOR : THERMOPLASTIC, UL 94V-0

CONTACT : COPPER ALLOY

CONTACT FINISH : GOLD ON MATING END, TIN ON TERMINATION END,
WITH ENTIRE CONTACT NICKEL UNDERPLATED

SHELL : COPPER ALLOY, NICKEL PLATED

SPECIFICATION:

CURRENT RATING : 1.5 AMP.

DIELECTRIC WITHSTANDING VOLTAGE : 500V AC FOR 1 MINUTE

INSULATION RESISTANCE : 1000MΩ MIN AT 500V DC.

CONTACT RESISTANCE : 30mΩ MAX

OPERATING TEMPERATURE : -55°C ~ +85°C.

ORDER INFORMATION :

U A 2 1 - 0 4 0 1 N E 1 4 0 - R
1 2 3 4 5 6 7 8 9 10

1 SERIES:

2 POSITION:
04

3. CONTACT TYPE/MATERIAL:
0=FFEMALE/COPPER ALLOY

4 CONTACT PLATING:
1=SELECTIVE GOLD FLASH
6=SELECTIVE 30u" GOLD
0=STANDARD:1

5 INSULATOR COLOR:
1=BLACK
N=NATURE

6 INSULATOR MATERIAL:
C=NYLON
E=LCP

7. SHELL PLATING:
1=NICKEL

8 BOARD MOUNTING OPTIONS:
4=W/ BACK COVER AND SMD
SHELL PEG

9. MATING OPTION:
0=STANDARD

10 GREEN PRODUCT:
R=RoHS COMPLIANT

淮洋有限公司 HUIYANG CO.,LTD.
www.hy1688.com.tw TEL:886-2-82618986

GENERAL TOLERANCE

XX ±0.25
XX ±0.20
XXX ±0.10

ANGLE TOLERANCE ±3°

DRAWN

MANDY

DATE

03-02-2010

CHECKED

Henry

DATE

03-02-2010

APPROVED

Henry

DATE

03-02-2010

DRAWING NO.

C-UA0019

CUSTOMER DRAWING

TITLE

USB A SERIES RIGHT ANGLE SMD, JACK

PART NO

UA21-040XXX140-R

REV

A 0

SIZE
M

UNIT
mm

SCALE
3:1

SHEET
1 OF 1

