
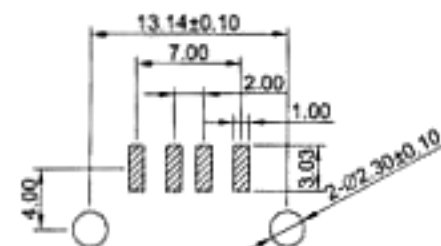
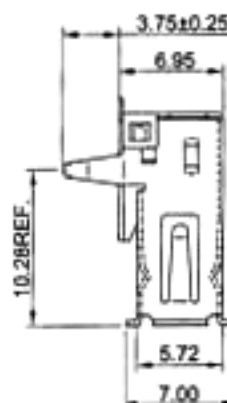
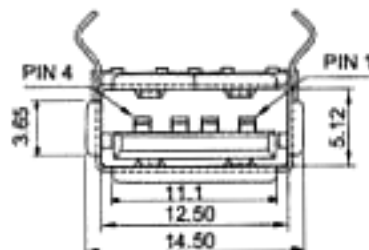
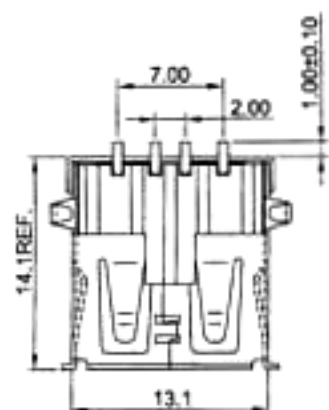


REV.	ECN.	DATE	DWN	APVD



RECOMMENDED P.C.B. PATTERN LAYOUT±0.1mm

MATERIAL:

INSULATOR : THERMOPLASTIC, UL 94V-0.

CONTACT : COPPER ALLOY.

CONTACT FINISH : GOLD ON MATING END, TIN ON TERMINATION END,
WITH ENTIRE CONTACT NICKEL UNDERPLATED.

SHELL : COPPER ALLOY, NICKEL PLATED.

SPECIFICATION:

CURRENT RATING : 1.5 AMP.

DIELECTRIC WITHSTANDING VOLTAGE : 500V AC FOR 1 MINUTE.

INSULATION RESISTANCE : 1000MΩ MIN. AT 500V DC.

CONTACT RESISTANCE : 30mΩ MAX.

OPERATING TEMPERATURE : -55°C ~ +85°C.

ORDER INFORMATION :

U A 2 1 - 0 4 0 1 1 E 1 0 0 - R
1 2 3 4 5 6 7 8 9 10

- | | |
|---------------------------|--|
| 1. SERIES: | 7. SHELL PLATING: |
| 2. POSITION: | 1=NICKEL |
| 04 | 8. BOARD MOUNTING OPTIONS: |
| 3. CONTACT TYPE/MATERIAL: | 0=WITH BACK COVER AND KINKED SHELL PEG |
| 0=FEMALE/COPPER ALLOY | 1=W/O BACK COVER AND KINKED SHELL PEG |
| 4. CONTACT PLATING: | 9. MATING OPTION: |
| 1=SELECTIVE GOLD FLASH | 0=STANDARD |
| 6=SELECTIVE 30u" GOLD | 10. GREEN PRODUCT: |
| ◎STANDARD:1 | R=RoHS COMPLIANT |
| 5. INSULATOR COLOR: | |
| 1=BLACK | |
| N=NATURE | |
| 6. INSULATOR MATERIAL: | |
| C=NYLON | |
| E=LCP | |

淮洋有限公司 HUAIYANG CO., LTD.
www.hy1688.com.tw TEL:886-2-82618986

GENERAL TOLERANCE
X.X ±0.25
X.XX ±0.20
X.XXX ±0.10
ANGLE TOLERANCE ±3°

DRAWN. MANDY
CHECKED. Allison
APPROVED. Henry

DATE 07-14-2008
DATE 07/15/2008
DATE 07-15-2008

DRAWING NO. C-UA0012
TITLE. USB A SERIES RIGHT ANGLE SMD JACK
PART NO. UA21-040XXX00-R
CUSTOMER DRAWING
REV A.0

SIZE A4
UNIT mm
SCALE 2:1
SHEET 1 OF 1