
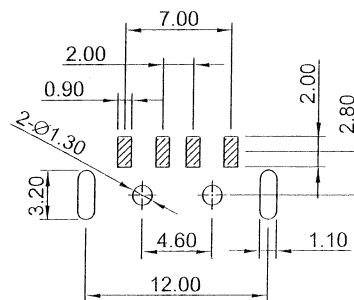

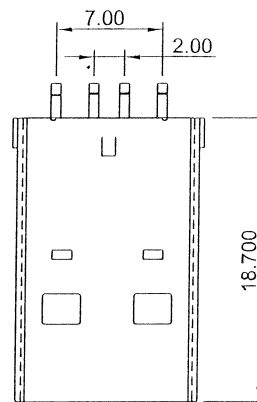

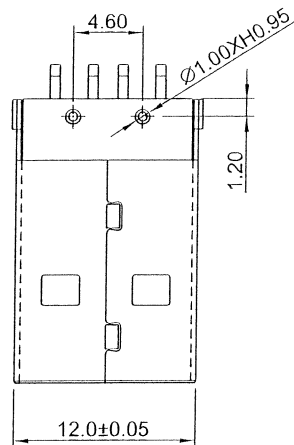
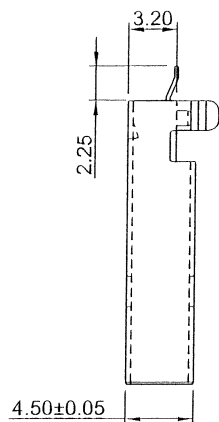


REV.	ECN.	DATE	DWN	APVD



RECOMMENDED PCB PATTERN LAYOUT ±0.1mm

MATERIAL:

INSULATOR : THERMOPLASTIC, UL 94V-0.

STANDARD : PBT.

CONTACT : COPPER ALLOY.

CONTACT FINISH : GOLD ON MATING END, TIN ON TERMINATION END,
WITH ENTIRE CONTACT NICKEL UNDERPLATED.

SHELL : SPCC, NICKEL PLATED.

SPECIFICATION:

CURRENT RATING : 1.5 AMP.

DIELECTRIC WITHSTANDING VOLTAGE : 500V AC FOR 1 MINUTE.

INSULATION RESISTANCE : 1000MΩ MIN.

CONTACT RESISTANCE : 30mΩ MAX.

OPERATING TEMPERATURE : -55°C ~ +85°C.

ORDER INFORMATION :

U A 2 2 - 0 4 1 1 1 B 1 0 0 - R
1 2 3 4 5 6 7 8 9 10

- | | |
|---------------------------|------------------------|
| 1. SERIES: | 6. INSULATOR MATERIAL: |
| 2. POSITION: | B=PBT |
| 04=4 PIN | E=LCP |
| 3. CONTACT TYPE/MATERIAL: | 7. SHELL PLATING: |
| 1=MALE/COPPER ALLOY | 1=NICKEL |
| 4. CONTACT PLATING: | 8. MOUNTING OPTIONS: |
| 1=SELECTIVE GOLD FLASH | 0=Ø1.0 POST, |
| 6=SELECTIVE 30u" GOLD | WITH KINKED SHELL PEG |
| 5. INSULATOR COLOR: | 9. MATING OPTIONS: |
| 1=BLACK | 0=STANDARD TYPE |
| | 10. GREEN PRODUCT: |
| | R=RoHS COMPLIANT |

淮洋有限公司 HUIYANG CO., LTD.
www.hy1688.com.tw TEL:886-2-82618986

GENERAL TOLERANCE

X.X ±0.25
X.XX ±0.20
X.XXX ±0.10

DRAWN.

MANDY

DATE

01-08-2009

DRAWING NO.

C-UA0010

CUSTOMER DRAWING

CHECKED.

Henry

DATE

01-08-2009

TITLE.

USB A SERIES RIGHT ANGLE SMD, PLUG

APPROVED.

Henry

DATE

01-08-2009

PART NO.

UA22-041X1X100-R

REV

A.0

SIZE
A4

UNIT
mm

SCALE.
2:1

SHEET.
1 OF 1

