
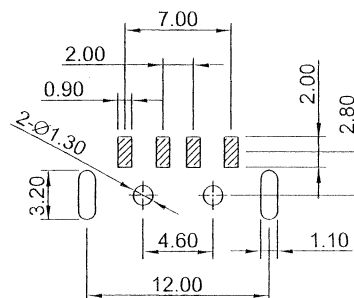
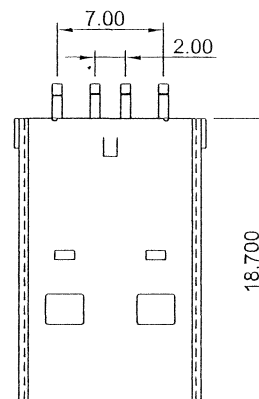

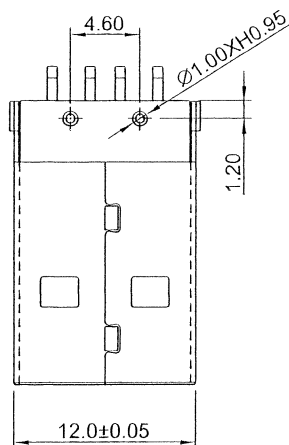
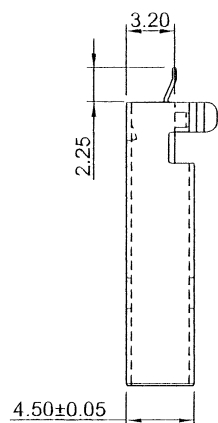


REV.	ECN.	DATE	DWN	APVD



RECOMMENDED PCB PATTERN LAYOUT ±0.1mm

MATERIAL:

INSULATOR : THERMOPLASTIC, UL 94V-0.

STANDARD : PBT.

CONTACT : COPPER ALLOY.

CONTACT FINISH : GOLD ON MATING END, TIN ON TERMINATION END,
WITH ENTIRE CONTACT NICKEL UNDERPLATED.

SHELL : SPCC, NICKEL PLATED.

SPECIFICATION:

CURRENT RATING : 1.5 AMP.

DIELECTRIC WITHSTANDING VOLTAGE : 500V AC FOR 1 MINUTE.

INSULATION RESISTANCE : 1000MΩ MIN.

CONTACT RESISTANCE : 30mΩ MAX.

OPERATING TEMPERATURE : -55°C ~ +85°C.

ORDER INFORMATION :

U A 2 2 - 0 4 1 1 1 B 1 0 0 - R
1 2 3 4 5 6 7 8 9 10

1. SERIES:

2. POSITION:

04=4 PIN

3. CONTACT TYPE/MATERIAL:

1=MALE/COPPER ALLOY

4. CONTACT PLATING:

1=SELECTIVE GOLD FLASH

6=SELECTIVE 30u" GOLD

5. INSULATOR COLOR:

1=BLACK

6. INSULATOR MATERIAL:

B=PBT

E=LCP

7. SHELL PLATING:

1=NICKEL

8. MOUNTING OPTIONS:

0=Ø1.0 POST,
WITH KINKED SHELL PEG

9. MATING OPTIONS:

0=STANDARD TYPE

10. GREEN PRODUCT:

R=RoHS COMPLIANT

淮洋有限公司 HUI YANG CO., LTD.
www.hy1688.com.tw TEL:886-2-82618986

GENERAL TOLERANCE

X.X ±0.25

X.XX ±0.20

X.XXX ±0.10

DRAWN.

MANDY

DATE

01-08-2009

DRAWING NO.

C-UA0010

CUSTOMER DRAWING

CHECKED.

Handwritten signature

DATE

01-08-2009

TITLE.

USB A SERIES RIGHT ANGLE SMD, PLUG

APPROVED.

Handwritten signature

DATE

01-08-2009

PART NO.

UA22-041X1X100-R

REV

A.0

SIZE
A4

UNIT
mm

SCALE.
2:1

SHEET.
1 OF 1

