





REV.	ECN.	DATE	DWN	APVD

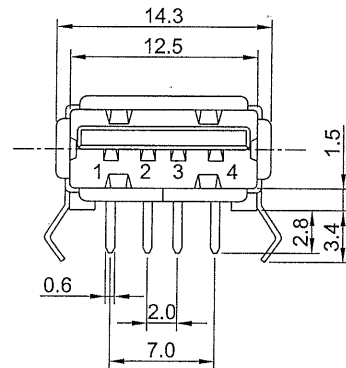

WITH BACK SHELL

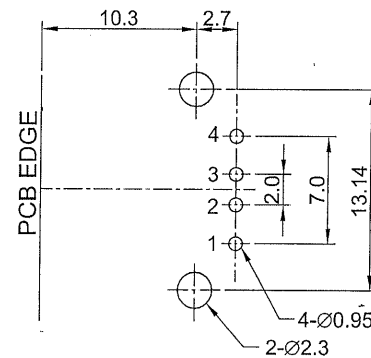

PCB LAYOUT±0.1mm
(BOTTOM VIEW)



W/O BACK SHELL

MATERIAL:

INSULATOR : THERMOPLASTIC, UL 94V-0.

STANDARD : PBT.

CONTACT : PHOS. BRONZE, T=0.25mm

CONTACT FINISH : GOLD ON MATING END, TIN ON TERMINATION END,
WITH ENTIRE CONTACT NICKEL UNDERPLATED.

SHELL : BRASS, NICKEL PLATED, T=0.3MM

SPECIFICATION:

CURRENT RATING : 1.5 AMP.

DIELECTRIC WITHSTANDING VOLTAGE : 500V AC FOR 1 MINUTE.

INSULATION RESISTANCE : 1000MΩ MIN.

CONTACT RESISTANCE : 30mΩ MAX.

OPERATING TEMPERATURE : -55°C ~ +85°C.

ORDER INFORMATION :

U A 9 1 - 0 4 2 1 1 B 1 0 0 - R
1 2 3 4 5 6 7 8 9 10

- | | |
|------------------------|------------------------|
| 1. SERIES NUMBER: | 6. INSULATOR MATERIAL: |
| 2. POSITION: | B=PBT |
| 04=4 PIN | C=NYLON |
| 3. CONTACT TYPE: | ©STANDARD:B |
| 2=FEMALE/PHOS. BRONZE | 7. SHELL PLATING: |
| 4. CONTACT PLATING: | 1=NICKEL |
| 1=SELECTIVE GOLD FLASH | 8. MOUNTING OPTIONS: |
| 4=SELECTIVE 15u" GOLD | 0=WITH BACK SHELL |
| 6=SELECTIVE 30u" GOLD | 1=W/O BACK SHELL |
| 5. INSULATOR COLOR: | 9. MATING OPTIONS: |
| 0=WHITE | 0=STANDARD TYPE |
| 1=BLACK | 10. GREEN PRODUCT: |
| N=NATURE | R=RoHS COMPLIANT |
| ©STANDARD:BLACK | |

淮 洋 有 限 公 司 HUAI YANG CO.,LTD.
www.hy1688.com.tw TEL:886-2-82610858

GENERAL TOLERANCE

± 0.3

DRAWN.

MANDY

DATE

07 - 11 - 2008

DRAWING NO.

C-UA0011

CUSTOMER DRAWING

CHECKED.

Allison

DATE

07/15/2008

TITLE.

USB A SERIES RIGHT ANGLE THRU-HOLE JACK

APPROVED.

Henry

DATE

07-15-2008

PART NO.

UA91-042XXXXX0-R

REV

A.0

SIZE
A4

UNIT
mm

SCALE.
2 : 1

SHEET.
1 OF 1

