



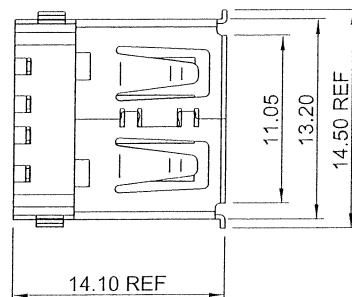



REV.	ECN.	DATE	DWN	APVD

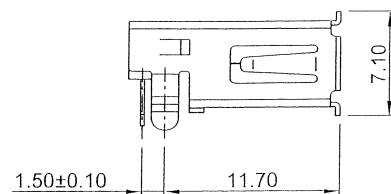

RECOMMENDED P.C.B LAYOUT±0.10mm

MATERIAL:

INSULATOR : PBT, UL 94V-0.

CONTACT : PHOSPHOR BRONZE.

CONTACT FINISH : GOLD ON MATING END, TIN ON TERMINATION END,
WITH ENTIRE CONTACT NICKEL UNDERPLATED.

SHELL : BRASS / SPCC, NICKEL PLATED.

SPECIFICATION:

CURRENT RATING : 1.5 AMP.

DIELECTRIC WITHSTANDING VOLTAGE : 500V AC FOR 1 MINUTE.

INSULATION RESISTANCE : 1000MΩ MIN.

CONTACT RESISTANCE : 30mΩ MAX.

OPERATING TEMPERATURE : -55°C ~ +85°C.

ORDER INFORMATION :

U A 9 4 - 0 4 2 1 0 B 1 1 0 - R
1 2 3 4 5 6 7 8 9 10

- | | |
|---------------------------|---------------------------------------|
| 1. SERIES: | 7. SHELL PLATING: |
| 2. POSITION: | 1=NICKEL |
| 04 | |
| 3. CONTACT TYPE/MATERIAL: | 8. MOUNTING OPTION: |
| 2=FEMALE/PHOS.BRONZE | 1=W/O BACK COVER AND KINKED SHELL PEG |
| 4. CONTACT PLATING: | 9. MATING OPTION: |
| 1=SELECTIVE GOLD FLASH | 0=STANDARD TYPE |
| 6=SELECTIVE 30u" GOLD | 10. GREEN PRODUCT: |
| 5. INSULATOR COLOR: | R=RoHS COMPLIANT |
| 0=WHITE | |
| 1=BLACK | |
| 6. INSULATOR MATERIAL: | |
| B=PBTT | |

淮洋有限公司 HUI YANG CO.,LTD.
www.hy1688.com.tw TEL:886-2-82610858

GENERAL TOLERANCE

X.X ± 0.25
X.XX ± 0.20
X.XXX ± 0.10
X.° ± 3°
X.X° ± 1°

DRAWN.

MANDY

DATE

02-16-2009

DRAWING NO.

C-UA0017

CUSTOMER DRAWING

CHECKED.

Henry

DATE

02-16-2009

TITLE.

USB A SERIES RIGHT ANGLE OFFSET DIP

APPROVED.

Henry

DATE

02-16-2009

PART NO.

UA94-042XXB110-R

REV

A.0

SIZE
A4

UNIT
mm

SCALE.
2:1

SHEET.
1 OF 1

