

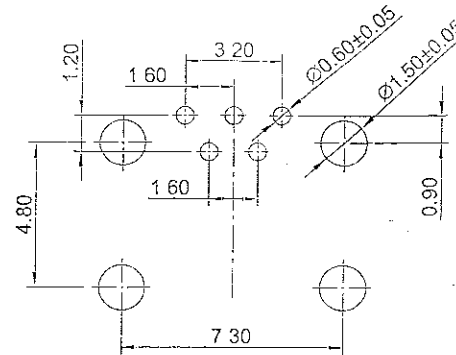


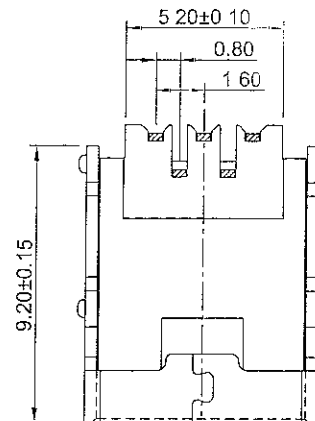


REV.	ECN.	DATE	DWN	APVD

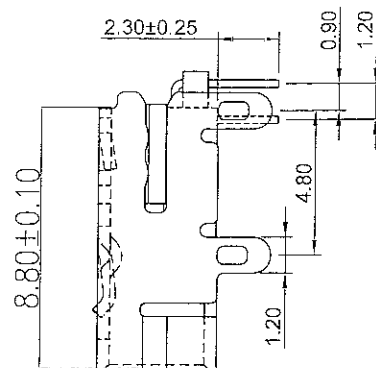

PC BOARD LAYOUT ±0.10mm

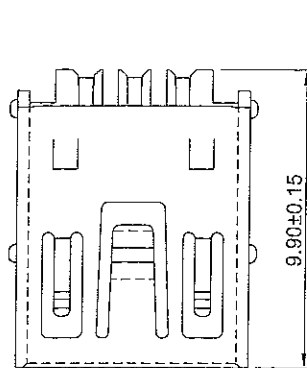

MATERIAL:

INSULATOR : LCP UL 94V-0
CONTACT : PHOS BRONZE
CONTACT FINISH : GOLD ON MATING END, TIN ON TERMINATION END
WITH ENTIRE CONTACT NICKEL UNDERPLATED
SHELL : BRASS NICKEL PLATED

SPECIFICATION:

CURRENT RATING : 1 AMP
DIELECTRIC WITHSTANDING VOLTAGE : 100V AC FOR 1 MINUTE
INSULATION RESISTANCE : 100M Ω MIN
CONTACT RESISTANCE : 50m Ω MAX
OPERATING TEMPERATURE : -20°C ~ +60°C

ORDER INFORMATION :

UM94 - 05 2 1 1 E 1 0 0 - R
1 2 3 4 5 6 7 8 9 10

- | | |
|--------------------------|------------------------|
| 1 SERIES: | 7 SHELL PLATING: |
| 2 POSITION: | 1=NICKEL |
| 05 = 5 PIN | 8 OPTION: |
| 3 CONTACT TYPE/MATERIAL: | 0=TYPE 0 (4 METAL PEG) |
| 2=FEMALE/PHOS BRONZE | 1=TYPE 1 (2 METAL PEG) |
| 4 CONTACT PLATING: | 9 PACKING TYPE : |
| 1=SELECTIVE GOLD FLASH | 0=IN TRAY |
| 6=SELECTIVE 30u" GOLD | 10 GREEN PRODUCT: |
| 5 INSULATOR COLOR: | R=RoHS COMPLIANT |
| 1=BLACK | |
| 6 INSULATOR MATERIAL: | |
| E=LCP | |

淮洋有限公司 HUAI YANG CO., LTD.
www.hy1688.com.tw TEL:886-2-82618986

GENERAL TOLERANCE

XX ±0.25
XX ±0.20
XXX ±0.10

DRAWN

MANDY

DATE

11-10-2008

CHECKED

Johnson

DATE

11/14/2008

APPROVED

Henry

DATE

11-14-2008

DRAWING NO

C-UM0010

CUSTOMER DRAWING

TITLE

MINI USB B FEMALE RIGHT ANGLE
THRU-HOLE TYPE 5PIN

PART NO

UM94-052X1E100-R

REV

A.0

SIZE
A4

UNIT
mm

SCALE
2:1

SHEET
1 OF 1

