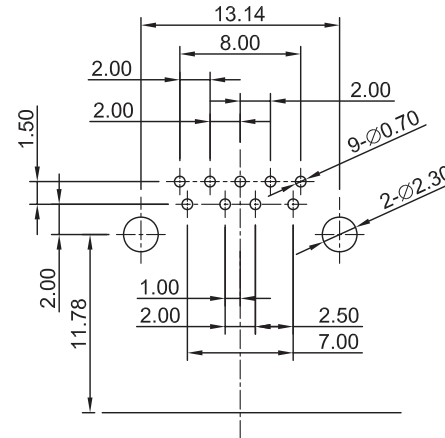
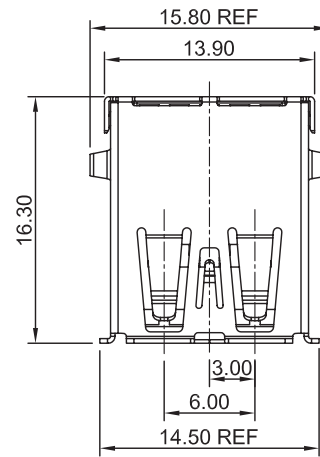
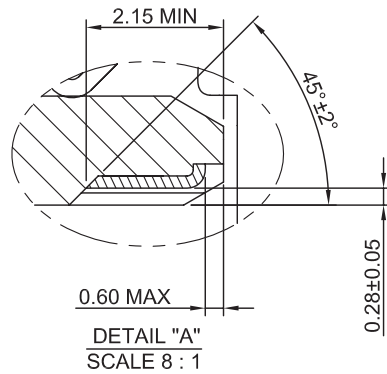
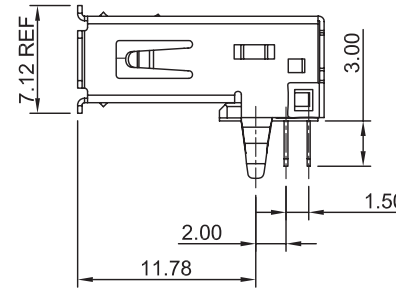
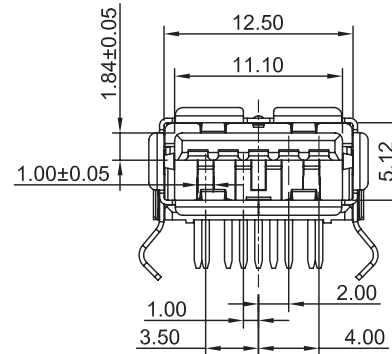
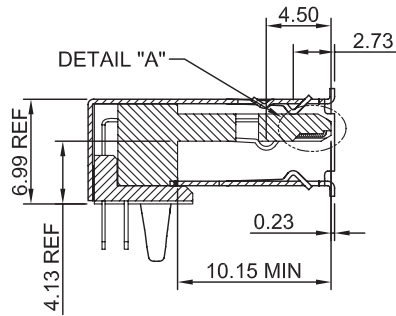



REV.	ECN.	DATE	DWN	APVD

RECOMMENDED PCB LAYOUT
TOP VIEWDETAIL "A"
SCALE 8 : 1**MATERIAL:**

INSULATOR : PBT, UL 94V-0.

5 PIN CONTACT : COPPER ALLOY.

4 PIN CONTACT : PHOSPHOR BRONZE.

CONTACT FINISH : GOLD ON MATING END, TIN ON TERMINATION END,
WITH ENTIRE CONTACT NICKEL UNDERPLATED.

SHELL : STAINLESS, NICKEL PLATED.

SPECIFICATION:

CURRENT RATING : 1.5 AMP.

DIELECTRIC WITHSTANDING VOLTAGE : 500V AC FOR 1 MINUTE.

INSULATION RESISTANCE : 1000MΩ MIN.

CONTACT RESISTANCE : 30mΩ MAX.

OPERATING TEMPERATURE : -55°C ~ +85°C.

淮洋有限公司 HUI YANG CO., LTD.
www.hy1688.com.tw TEL:886-2-82610858

GENERAL TOLERANCE

X.X ± 0.25
X.XX ± 0.20
X.XXX ± 0.10
X.° ± 3°
X.X° ± 1°

DRAWN.

MANDY

DATE

03 - 31 - 2011

DRAWING NO.

C-W14-0045-R

CUSTOMER DRAWING

CHECKED.

HENRY

DATE

03 - 31 - 2011

TITLE.

USB 3.0 AF RIGHT ANGLE DIP

APPROVED.

HENRY

DATE

03 - 31 - 2011

PART NO.

W14-0045-R

REV

A.0

SIZE
A4UNIT
mmSCALE.
2 : 1SHEET.
1 OF 1