



P.C.B TOP LAYOUT VIEW

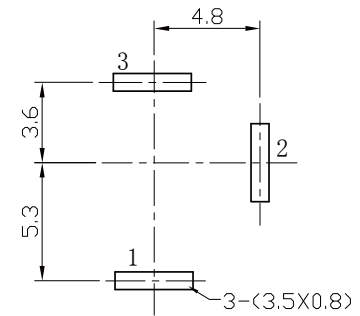

SCHEMATIC



PIN	$\phi 2.0$	$\phi 2.35$	$\phi 2.5$
APPD.			

- SPECIFICATION**
1. Rating DC 30V 0.5A
 2. Contact resistance $\leq 50m\Omega$
 3. Insulation resistance $100M\Omega$ (DC250V)
 4. Withstand voltage 500VAC
 5. Insertion and extraction force 3-30N;
 6. life test 5,000 cycles

6	COVER	1	PF	
5	HOUSING	1	PBT	
4	PIN	1	BRASS	Ni-Plating
3	CONTACT	1	BRASS	Sn-Plating
2	FOOT PIECE	1	BRASS	Sn-Plating
1	SPRING	1	STAINLESS STEEL	Sn-Plating
NO.	DESCRIPTION	QTY	MATERIAL	PLATING

UNIT: MM	TYPE:	MODEL NO:	PAPER NO:	PAGE 1 OF 1		
	DC POWER JACK	DC0013A-X	A4	TOLERANCE	ANGLES	SCALE
			± 0.3	$\pm 2'$	1:1	VER
						1

DESIGNER		淮洋有限公司 HUAI YANG CO., LTD. www.hy1688.com.tw TEL:886-2-82618986
CHECK		
APPROVED		
BY:		