



**P.C.B LAYOUT
TOP
VIEW**

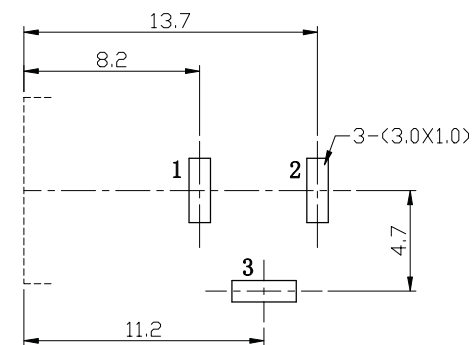

SCHEMATIC



PIN	∅2.0	∅2.35	∅2.5
APPD.			

- SPECIFICATION**
 1. Rating : DC 30V 0.5A ;
 2. Contact resistance : ≤50mΩ ;
 3. Insulation resistance : ≥100MΩ (DC250V) ;
 4. Withstand voltage : 500VAC ;
 5. Insertion and extraction force : 3-25N ;
 6. life test : 5,000 cycles ◦

6	COVER	1	PBT	
5	HOUSING	1	PBT	
4	PIN	1	BRASS	Ni-Plating
3	FLAT PIECE	1	BRASS	Sn-Plating
2	CURVE PIECE	1	BRASS	Sn-Plating
1	SPRING	1	STAINLESS STEEL	Sn-Plating
NO.	DESCRIPTION	QTY	MATERIAL	PLATING

UNIT:MM	TYPE:	MODEL NO:	PAPER NO: A4		PAGE 1 OF 1	
	DC JACK	DC00200- <u> </u>	TOLERANCE	ANGLES	SCALE	VER
			±0.3	±2°	1:1	1

DESIGNER BY: _____
 CHECK BY: _____
 APPROVED BY: _____

淮洋有限公司 HUI YANG CO., LTD.
 www.hy1688.com.tw TEL:886-2-82618986