


□ : TERMINAL NO. ○ : ITEM NO.

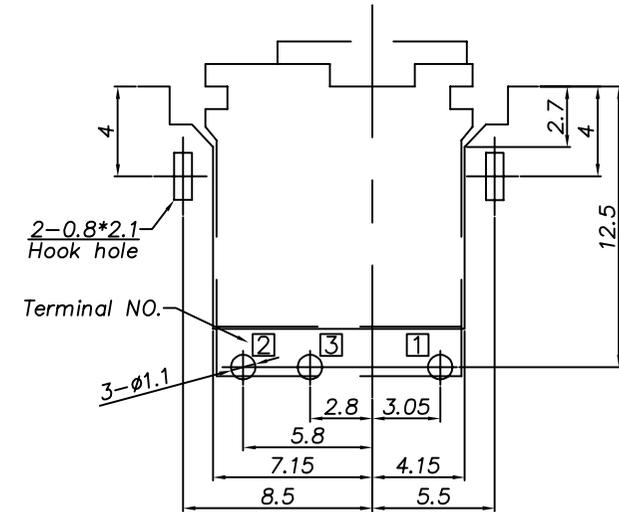

P. C. B Layout
(Copper-sided view)

SPECIFICATION
 1. Rating : DC 18V 3A;
 2. Contact resistance: $\leq 30\text{m}\Omega$;
 3. Insulation resistance: $\geq 100\text{M}\Omega$ (DC250V);
 4. Withstand voltage: 500VAC ;
 5. Insertion and extraction force: 3-30N;
 6. Life test: 5,000 cycles.

⑤	Hook	1	Brass	DC00810-HK	Sn-Plating
④	Shunt terminal	1	Brass	DC00820-03	Sn-Plating
③	Tip spring	1	Bronze	DC00820-02	Sn-Plating
②	Center pin terminal	1	Bronze	DC00820-01	Sn-Plating
①	Housing	1	PA46	DC00820-S1	

NO.	DESCRIPTION	QTY	MATERIAL	PART NO.	PLATING
-----	-------------	-----	----------	----------	---------

UNIT: MM	TYPE:	MODEL NO:	PAPER NO: A4	PAGE 1 OF 1
	DC POWER JACK	DC00820-C	TOLERANCE: ±0.3	ANGLES: ±2'
			SCALE: FULL	VER: 2

DESIGNER BY: dengtao 2008.4.25
 CHECK BY:
 APPROVED BY:
 淮洋有限公司 HUI YANG CO., LTD.
 www.hy1688.com.tw TEL:886-2-82618986