


□: TERMINAL NO. ○: ITEM NO.

SPECIFICATION

1. Rating ?DC 30V 1.0A?
2. Contact resistance? $\leq 30m\Omega$?
3. Insulation resistance?? $100M\Omega$ (DC250V)?
4. Withstand voltage? 500VAC ?
5. Insertion and extraction force? 3-30N;
6. life test? 5,000 cycles?

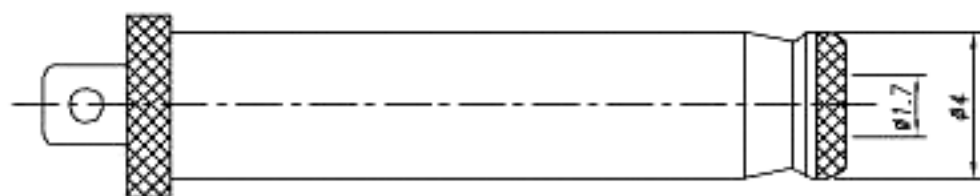

④	Spring	1	Stainless steel	DC00830-02(IP-1055)	Sn-Plating
③	Center pin	1	Brass	DC00830-01(YZ-1056)	Sn-Plating
②	Bushing	1	Brass	DC00830-88(ZT-1054)	Ni-Plating
①	Housing	1	PA66	DC00830-51(ST-1053)	
NO.	DESCRIPTION	QTY	MATERIAL	PART NO.	PLATING
UN/1MM	TYPE	MODEL NO:		PAPER NO: A4	PAGE 1 OF 1
		DC POWER JACK		DC00830-B	
		TOLERANCE	ANGLES	SCALE	VER
		± 0.3	$\pm 2^\circ$	FULL	2

DESIGNER BY: ???2008.01.08

CHECK BY:

APPROVED BY:

淮洋有限公司 HUI YANG CO., LTD.

www.hy1688.com.tw TEL:886-2-82618986