
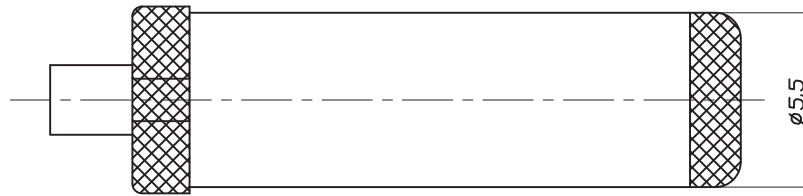


| | | | |
|-----------|------------|-------------|------------|
| Model NO. | DC00840-BH | DC00840-BI | DC00840-BJ |
| PIN | $\phi 2.0$ | $\phi 2.35$ | $\phi 2.5$ |

- Ordering information:
 DC00840-B □ 66 0A T 0 4
 ① ② ③ ④ ⑤ ⑥ ⑦ ⑧
- ①: Series No
 - ②: Schematic option: B
 - ③: Center pin diameter:
H=2.0 I=2.35 J=2.5
 - ④: Material of housing:
66=PA66 (Only)
 - ⑤: Housing color:
0A=Black(Only)
 - ⑥: Terminal plating
T=Tin(Sn) (Standard)
S=Silver(Ag)
G=Gold(Au)
 - ⑦: Special option
0: No special option
 - ⑧: Packing mode:
4: Bag packing

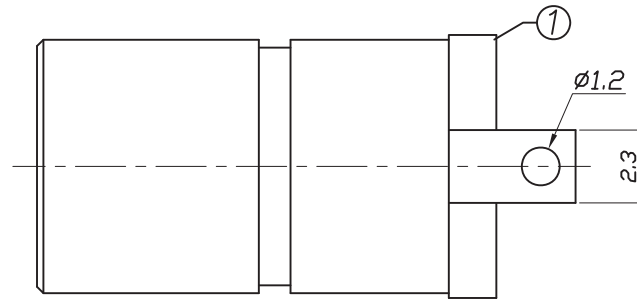

SPECIFICATION

1. Rating : DC 20V 3.0A;
2. Contact resistance: $\leq 50m\Omega$;
3. Insulation resistance: $\geq 100M\Omega$ (DC250V);
4. Withstand voltage: 500VAC ;
5. Insertion and extraction force: 3-30N;
6. life test: 5,000 cycles.

| | | | | | |
|---|------------|---|-----------------|---|------------|
| ④ | Spring | 1 | Stainless steel | DC00840-02(TP-1059) | Sn-Plating |
| ③ | Center pin | 1 | Brass | DC00840-99H DC00840-99I (YZ-1060) DC00840-99J | Sn-Plating |
| ② | Bushing | 1 | Brass | DC00840-88(ZT-1058) | Ni-Plating |
| ① | Housing | 1 | PA66 | DC00840-S1(ST-1057) | |

| NO. | DESCRIPTION | QTY | MATERIAL | PART NO. | PLATING |
|---------|---------------|-------------------|----------|--------------|-------------|
| UNIT:MM | TYPE: | MODEL NO: | | PAPER NO: A4 | PAGE 1 OF 1 |
| | DC POWER JACK | DC00840-B_660AT04 | | TOLERANCE | ANGLES |
| | | | | SCALE | VER |
| | | | | ±0.3 | ±2° |
| | | | | FULL | 2 |

DESIGNER BY: *Zhubang 2008.07.23*
 CHECK BY:
 APPROVED BY:

淮洋有限公司 HUIYANG CO., LTD.
 www.hy1688.com.tw TEL:886-2-82618986