


P. C. B Layout
(Printed-sided view)

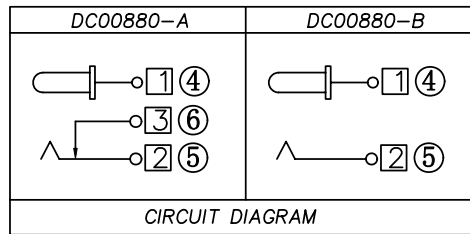

□ : TERMINAL NO. ○ : ITEM NO.

Model No.	DC00880- <u>D</u>	DC00880- <u>E</u>	DC00880- <u>F</u>
PIN	φ1.10	φ1.30	φ1.45

SPECIFICATION

1. Rating ≒ DC 30V 1.0A
2. Contact resistance ≒ 30m次
3. Insulation resistance ≒ 100M次 (DC250V)
4. Withstand voltage ≒ 500VAC
5. Insertion and extraction force ≒ 3-20N;
6. life test ≒ 5,000 cycles

6	Shunt terminal	1	Brass t=0.5	Ag-Plating
5	Tip spring	1	Bronze t=0.25	Ag-Plating
4	Center pin terminal	1	Brass t=0.5	Ag-Plating
3	Center pin	1	Brass	Ni-Plating
2	Cover	1	PA9T, UL-94V-0	
1	Housing	1	PA9T, UL-94V-0	

NO.	DESCRIPTION	QTY	MATERIAL	PLATING
UNIT:MM	TYPE:	MODEL NO:	PAPER NO: A4	PAGE 1 OF 1
	DC POWER JACK	DC00880-__	TOLERANCE	ANGLES
			±0.3	±2°
			SCALE	VER
			FULL	1

DESIGNER BY:	YUJUN 2007.6.6	淮洋有限公司 HUAI YANG CO., LTD. www.hy1688.com.tw TEL:886-2-82618986
CHECK BY:		
APPROVED BY:		