


Pin Hole Layout
(Jack Bottom View)

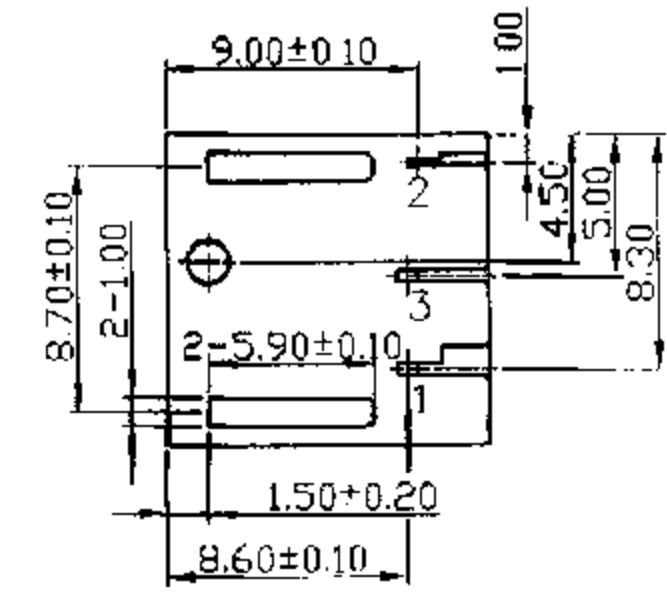

NO.	Description	Material	Q'TY	Finish
6.	Pin(2.0φ)	Copper	1	Nickel Plated
5.	Cover	PBT	1	Black Color
4.	Housing	PBT	1	Black Color
3.	Break Terminal	0.4T Brass	1	Silver Plated
2.	Sleeve Spring	0.2T TicuR1-M-EH	1	Silver Plated
1.	Pin Terminal	0.4T Brass	1	Silver Plated

淮洋有限公司 HUIYANG CO., LTD.		DATE	DWN	CHKD	APVD	MANAGER
www.hy1688.com.tw TEL:886-2-82618986		03.03.2006	易愛娣	陳若芳	王明	

PART NAME : DC POWER JACK	PART NUMBER:SCD447CCS000B00G	VERSION:3.0
TOLERANCE :±0.3mm UNLESS OTHERWISE SPECIFIED	UNIT:mm	SCALE:1/1

SPECIFICATIONS:
 Contact Resistance : 30mΩ max
 Insulation Resistance : 100MΩ min. at DC 500V
 Dielectric Withstanding Voltage: AC 500V for one minute
 Remark: ▲: The Most Important Dimension