


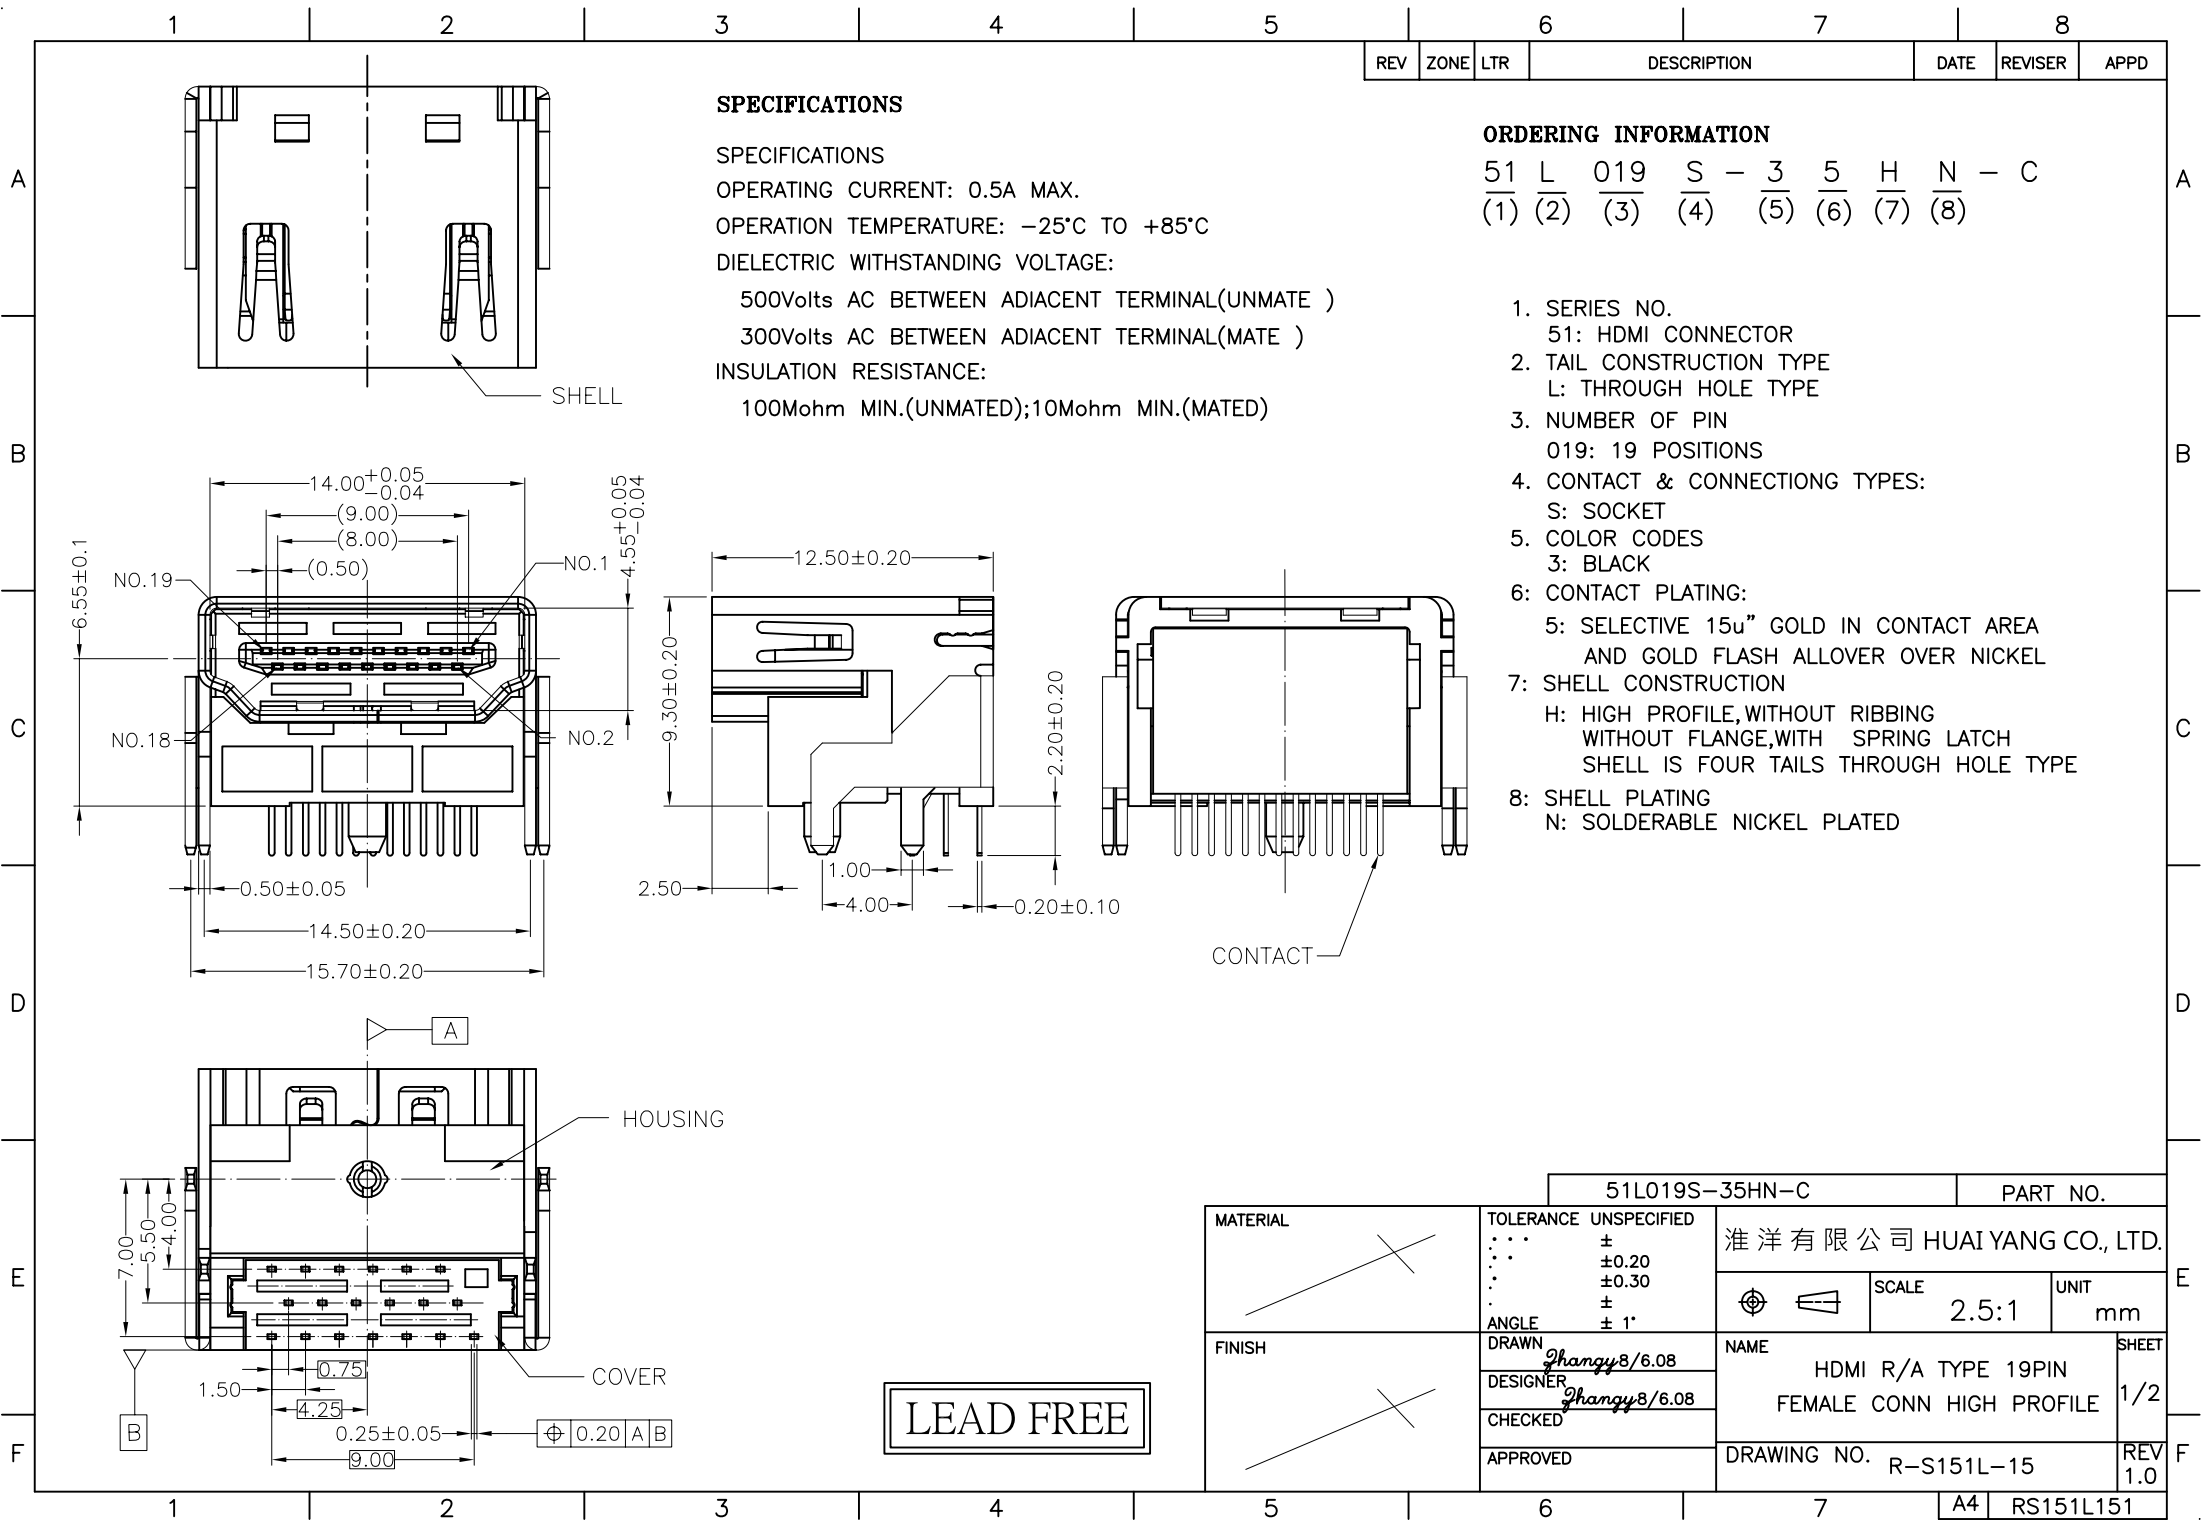

SPECIFICATIONS

SPECIFICATIONS
OPERATING CURRENT: 0.5A MAX.
OPERATION TEMPERATURE: -25°C TO +85°C
DIELECTRIC WITHSTANDING VOLTAGE:
500Volts AC BETWEEN ADIACENT TERMINAL(UNMATE)
300Volts AC BETWEEN ADIACENT TERMINAL(MATE)
INSULATION RESISTANCE:
100Mohm MIN.(UNMATED);10Mohm MIN.(MATED)

ORDERING INFORMATION

51 L 019 S - 3 5 H N - C
(1) (2) (3) (4) (5) (6) (7) (8)

- 1. SERIES NO.
51: HDMI CONNECTOR
- 2. TAIL CONSTRUCTION TYPE
L: THROUGH HOLE TYPE
- 3. NUMBER OF PIN
019: 19 POSITIONS
- 4. CONTACT & CONNECTIONG TYPES:
S: SOCKET
- 5. COLOR CODES
3: BLACK
- 6. CONTACT PLATING:
5: SELECTIVE 15u" GOLD IN CONTACT AREA
AND GOLD FLASH ALLOVER OVER NICKEL
- 7. SHELL CONSTRUCTION
H: HIGH PROFILE,WITHOUT RIBBING
WITHOUT FLANGE,WITH SPRING LATCH
SHELL IS FOUR TAILS THROUGH HOLE TYPE
- 8. SHELL PLATING
N: SOLDERABLE NICKEL PLATED

LEAD FREE

51L019S-35HN-C		PART NO.	
MATERIAL	TOLERANCE UNSPECIFIED ±0.20 ±0.30 ±1°	淮 洋 有 限 公 司 HUAI YANG CO., LTD.	
		SCALE 2.5:1	UNIT mm
		NAME HDMI R/A TYPE 19PIN FEMALE CONN HIGH PROFILE	
		DRAWING NO. R-S151L-15	
FINISH	DRAWN Zhangy8/6.08 DESIGNER Zhangy8/6.08 CHECKED APPROVED	SHEET 1/2	
		REV 1.0	
		A4 RS151L151	

