
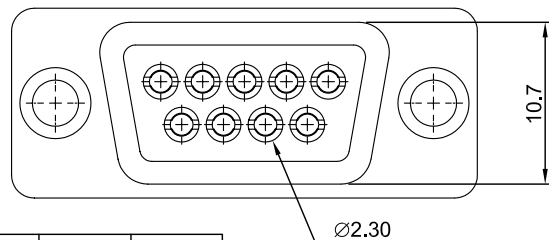
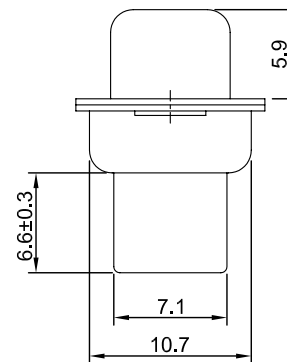
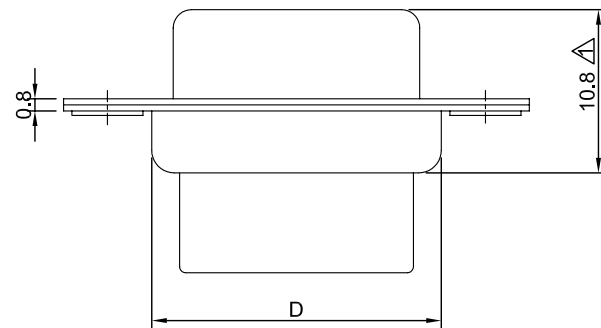


REV.	ECN.	DATE	DWN	APVD
A.1	ECN-080117-01	02/13/08	TRACY	HENRY

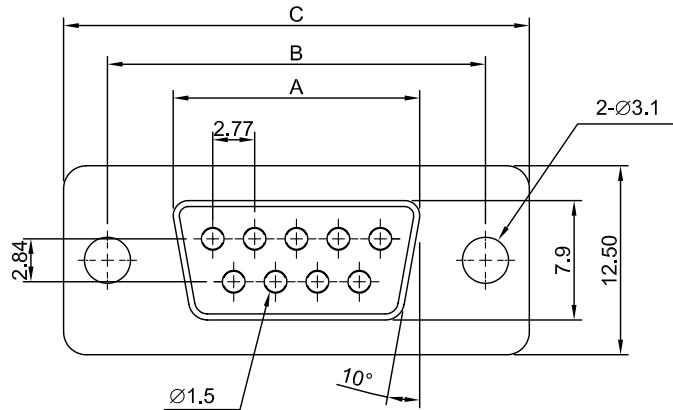

POSITION	A ± 0.20	B ± 0.20	C ± 0.38	D ± 0.20
09 PIN	16.30	25.00	30.80	19.15
15 PIN	24.60	33.30	39.20	27.60
25 PIN	38.35	47.05	53.05	41.10
37 PIN	54.80	63.50	69.40	57.40

MATERIAL:

FRONT INSULATOR : PBT, UL 94V-0.

BACK INSULATOR : NYLON, UL 94V-0.

SHELL : STEEL, NICKEL OR TIN PLATED.

SPECIFICATION:

INSULATION RESISTANCE : 1000MΩ MIN. AT 500V DC.

OPERATING TEMPERATURE : -55°C ~ +105°C.

ORDER INFORMATION :

DB71 - 09 0 0 1 B 2 0 0 0 - R
1 2 3 4 5 6 7 8 9 10

- | | |
|------------------------------|------------------------|
| 1. SERIES: | 7. PROCESS OPTION: |
| 2. POSITION: | 0=THRU. HOLE |
| 09 15 25 37 | 1=4.0mm OPEN HEX RIVET |
| 3. CONTACT TYPE: | 2=5.8mm OPEN HEX RIVET |
| 0=FEMALE | 8. PARTS OPTION: |
| 1=MALE | 0=NON ACCESSORIES |
| 4. INSULATOR COLOR: | 1=REAR RIVET+FIXED |
| 1=BLACK | SCREWS 4.8X10.1mm |
| 5. FRONT INSULATOR MATERIAL: | 4=REAR RIVET 4#40 |
| B=PBT | 7=FRONT RIVET 4#40 |
| 6. SHELL PLATING: | 9. INNER PACKAGE: |
| 2=TIN | 0=TRAY |
| 3=ZINC | 3=PLASTIC BAG |
| 5=NICKEL(FRONT SHELL), | 10. GREEN PRODUCT: |
| TIN(BACK SHELL) | R=RoHS COMPLIANT |

淮洋有限公司 HUI YANG CO., LTD.
www.hy1688.com.tw TEL:886-2-82618986

GENERAL TOLERANCE
X.X ± 0.25
X.XX ± 0.15
X.XXX ± 0.05
ANGLE TOLERANCE ± 1°
RADIUS ± 0.25
HOLE ± 0.13

DRAWN. JEAN
CHECKED. HENRY
APPROVED. HENRY

DATE 11 - 15 - 2005
DATE 11 - 23 - 2005
DATE 11 - 23 - 2005

DRAWING NO. C-DB0066





CUSTOMER DRAWING

TITLE. D-SUB CRIMP TYPE FEMALE

PART NO. DB71-XX0XXXXX00X-R

REV A.1

REV.	ECN.	DATE	DWN	APVD
A.1	ECN-080117-01	02/13/08	TRACY	HENRY

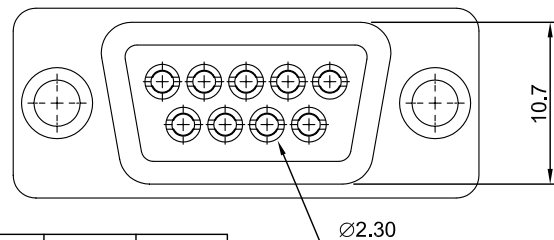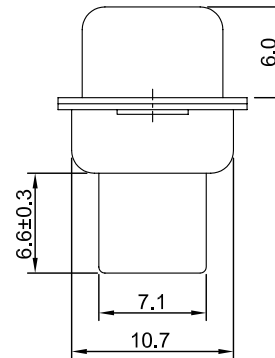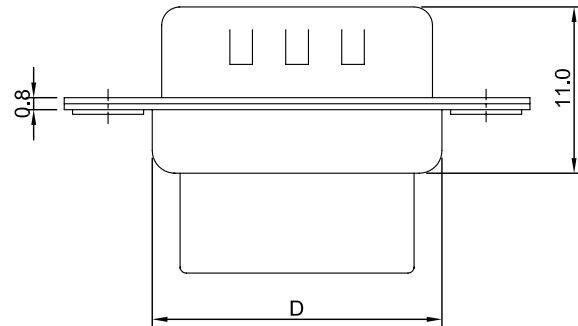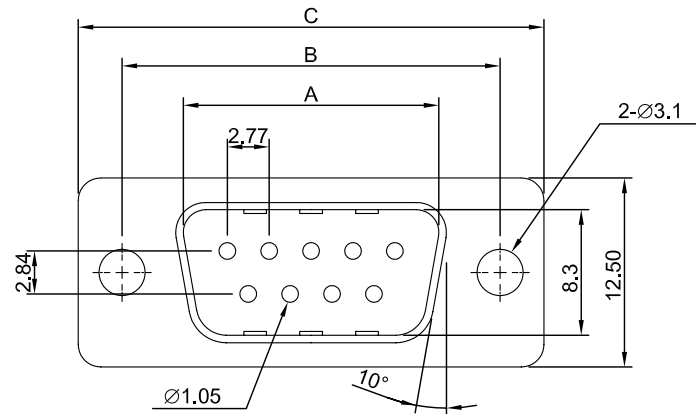

POSITION	A ± 0.20	B ± 0.20	C ± 0.38	D ± 0.20
09 PIN	16.90	25.00	30.80	19.15
15 PIN	25.25	33.30	39.20	27.60
25 PIN	38.95	47.05	53.05	41.10
37 PIN	55.40	63.50	69.40	57.40

MATERIAL:

FRONT INSULATOR : PBT, UL 94V-0.

BACK INSULATOR : NYLON, UL 94V-0.

SHELL : STEEL, NICKEL OR TIN PLATED.

SPECIFICATION:

INSULATION RESISTANCE : 1000MΩ MIN. AT 500V DC.

OPERATING TEMPERATURE : -55°C ~ +105°C.

ORDER INFORMATION :

D B 7 1 - 0 9 1 0 1 B 2 0 0 0 - R
1 2 3 4 5 6 7 8 9 10

1. SERIES:

2. POSITION:
09 15 25 37

3. CONTACT TYPE:
0=FEMALE
1=MALE

4. INSULATOR COLOR:
1=BLACK

5. FRONT INSULATOR MATERIAL:
B=PBT

6. SHELL PLATING:
2=TIN
3=ZINC
5=NICKEL(FRONT SHELL),
TIN(BACK SHELL)

7. PROCESS OPTION:

0=THRU. HOLE
1=4.0mm OPEN HEX RIVET
2=5.8mm OPEN HEX RIVET

8. PARTS OPTION:

0=NON ACCESSORIES
1=REAR RIVET+FIXED
SCREWS 4.8X10.1mm
4=REAR RIVET 4#40
7=FRONT RIVET 4#40

9. INNER PACKAGE:

0=TRAY
3=PLASTIC BAG

10. GREEN PRODUCT:
R=RoHS COMPLIANT

淮洋有限公司 HUI YANG CO., LTD.
www.hy1688.com.tw TEL:886-2-82618986

GENERAL TOLERANCE
X.X ± 0.25
X.XX ± 0.15
X.XXX ± 0.05
ANGLE TOLERANCE ± 1°
RADIUS ± 0.25
HOLE ± 0.13

DRAWN. JEAN
CHECKED. HENRY
APPROVED. HENRY

DATE 11 - 15 - 2005
DATE 11 - 23 - 2005
DATE 11 - 23 - 2005

DRAWING NO. C-DB0067

TITLE. D-SUB CRIMP TYPE MALE




PART NO. DB71-XX1XXXX00X-R

CUSTOMER DRAWING

REV A.1

SIZE A4 UNIT mm SCALE. 2 : 1 SHEET. 1 OF 1

REV.	ECN.	DATE	DWN	APVD
A.1	ECN-080117-01	02/13/08	TRACY	HENRY

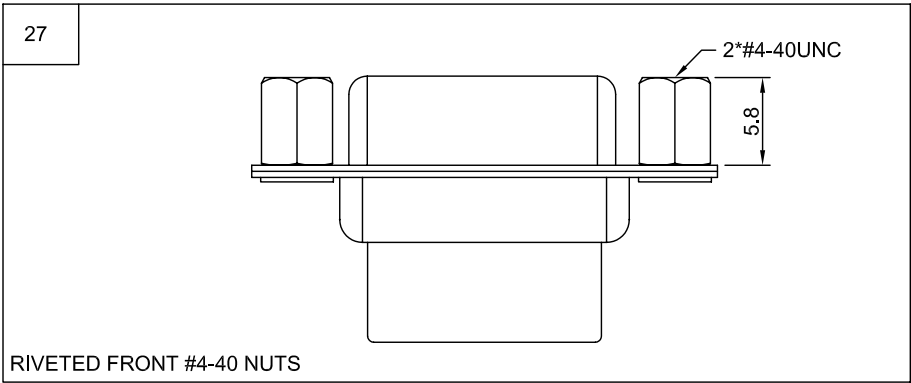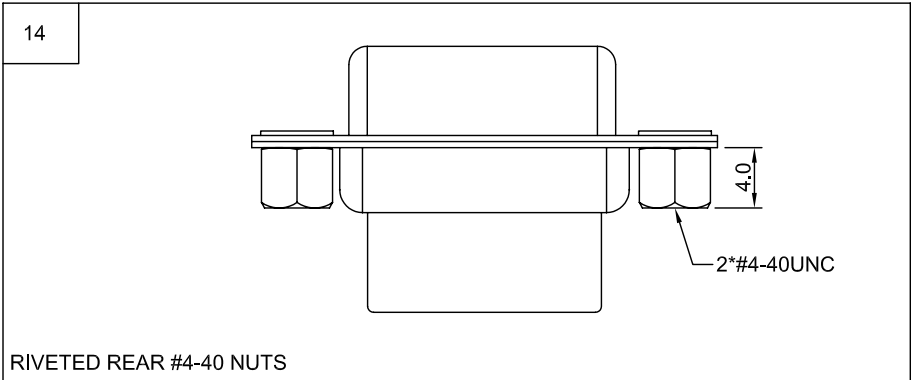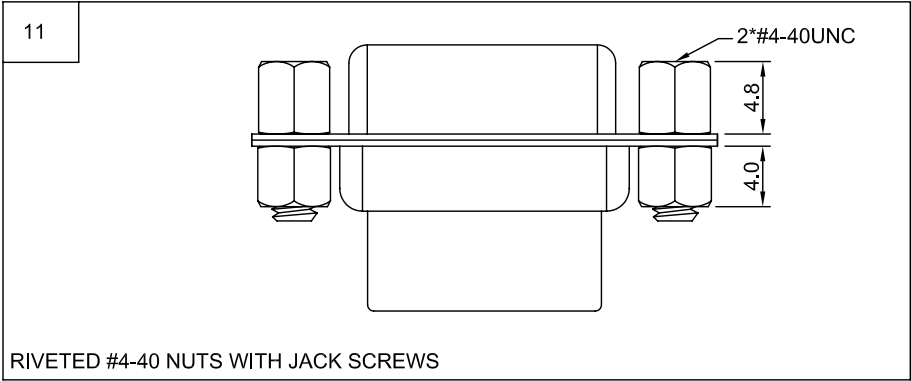

淮 洋 有 限 公 司 H U A I Y A N G C O . , L T D .
 www.hy1688.com.tw TEL:886-2-82618986

GENERAL TOLERANCE
 X.X ±0.25
 X.XX ±0.15
 X.XXX ±0.05
 ANGLE TOLERANCE ±1°
 RADIUS ±0.25
 HOLE ±0.13

DRAWN.

JEAN

DATE

11 - 15 - 2005

DRAWING NO.

C-DB0065

CUSTOMER DRAWING

CHECKED.

HENRY

DATE

11 - 25 - 2005

TITLE.

D-SUB CONN CRIMP

APPROVED.

HENRY

DATE

11 - 25 - 2005

PART NO.

DB71-MOUNT

REV

A.1

SIZE
A4

UNIT
mm

SCALE.
2 : 1

SHEET.
1 OF 1

