


REV.	ECN.	DATE	DWN	APVD

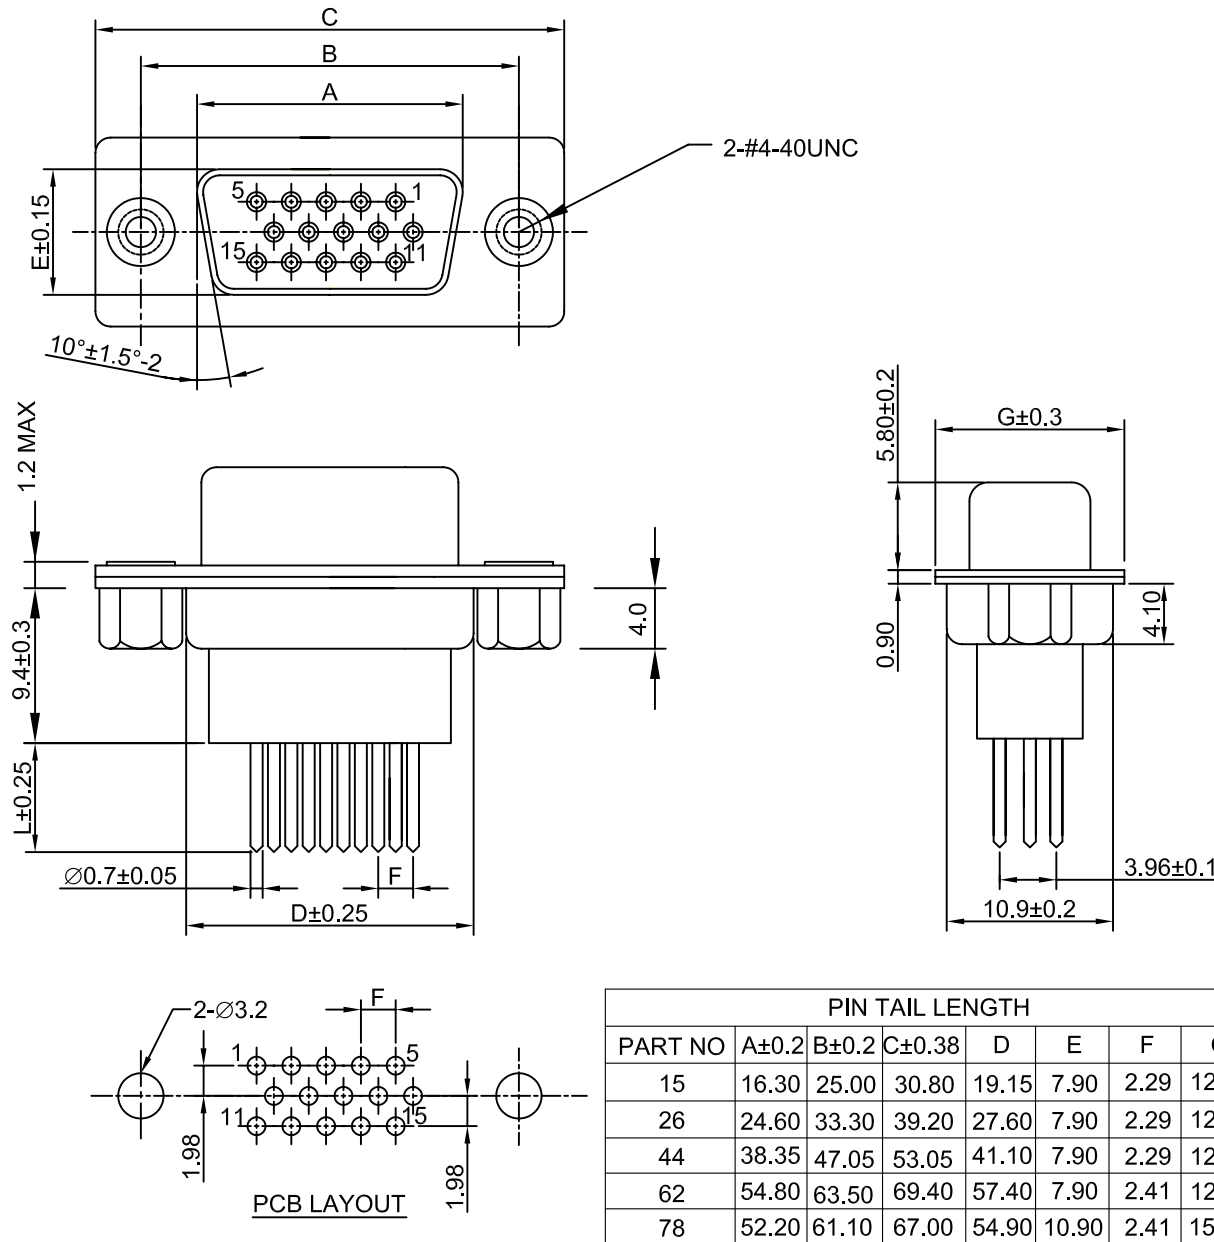

MATERIAL:

INSULATOR : PBT+30% GLASS FIBER, UL 94V-0.

CONTACT : COPPER ALLOY.

CONTACT FINISH : GOLD OVER NICKEL.

SHELL FINISH : STEEL , TIN, NICKEL OR ZINC PLATED.

SPECIFICATION:

CURRENT RATING : 2 AMP.

DIELECTRIC WITHSTANDING : 500V AC PER MINUTE.

INSULATION RESISTANCE : 1000MΩ MIN.

CONTACT RESISTANCE : 15mΩ MAX.

OPERATING TEMPERATURE : -50°C ~ +100°C.

ORDER INFORMATION :

DH14 - 15 0 1 1 B 2 1 4 2 - R
1 2 3 4 5 6 7 8 9 10 11

1. SERIES NUMBER:

2. POSITION :
15 26 44 62 78

3. CONTACT MATERIAL:
0=FEMALE

4. CONTACT PLATING:
1 = SELECTIVE GOLD FLASH
4 = SELECTIVE 15u" GOLD
6 = SELECTIVE 30u" GOLD
A = FULL GOLD FLASH

5. INSULATOR COLOR:
1=BLACK
9=BLUE (661C)

6. INSULATOR MATERIAL:
B=PBT

7. FRONT SHELL PLATING:
1=NICKEL
2=TIN
3=ZINC

8. MATING OPTIONS:

0=Ø3.2mm THRU. HOLE
1=4.0mm OPEN HEX RIVET
2=5.8mm OPEN HEX RIVET
9=9.6mm HEX BOARDLOCK RIVET
A=11.0mm HEX BOARDLOCK RIVET
B=11.9mm HEX BOARDLOCK RIVET
C=12.7mm HEX BOARDLOCK RIVET

9. MOUNTING OPTIONS:

0=NON ACCESSORIES
1=REAR RIVET+FIXED SCREWS
4=REAR RIVET 4#40
7=FRONT RIVET 4#40

10. PIN LENGTH(L DIM.):

0=3.6mm
1=5.4mm
2=7.2mm

11. GREEN PRODUCT:

R=RoHS COMPLIANT

淮洋有限公司 HUAI YANG CO., LTD.
www.hy1688.com.tw TEL:886-2-82618986

GENERAL TOLERANCE
X.X ± 0.25
X.XX ± 0.15
X.XXX ± 0.05
ANGLE TOLERANCE ± 1°
RADIUS ± 0.25
HOLE ± 0.13

DRAWN. TRACY

DATE 07 - 24 - 2006

DRAWING NO. DH14-XX0XXBX14X-R

C06007

CHECKED. HENRY

DATE 08 - 01 - 2006

TITLE. HIGH DENSITY D-SUB PCB STRAIGHT HIGH PROFILE STAMPED CONTACTS

APPROVED. HENRY

DATE 08 - 01 - 2006

PART NO. DH14-XX0XXBX14X-R

REV A.0

SIZE A4 UNIT mm SCALE. 2/1 SHEET. 1 OF 1