

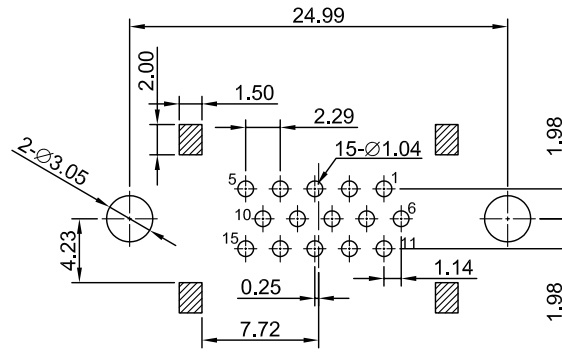
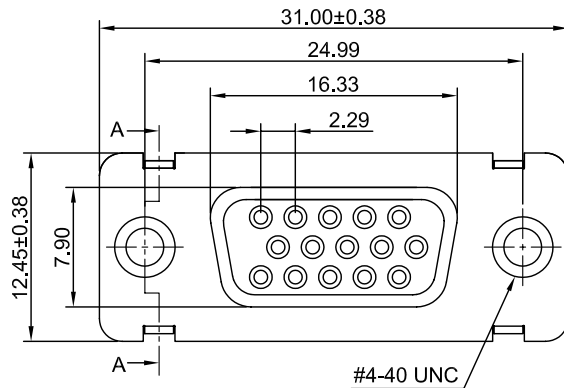


REV.	ECN.	DATE	DWN	APVD
A.1	ECN0709002	07/09/29	TRACY	HENRY

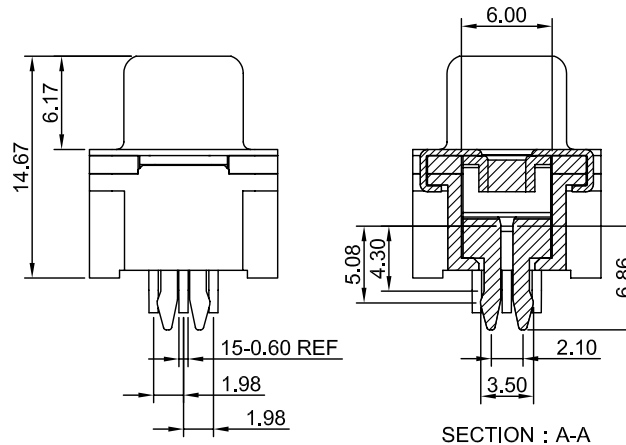

LAYOUT (COMPONENT SIDE VIEW)
TOLERANCE : ± 0.10

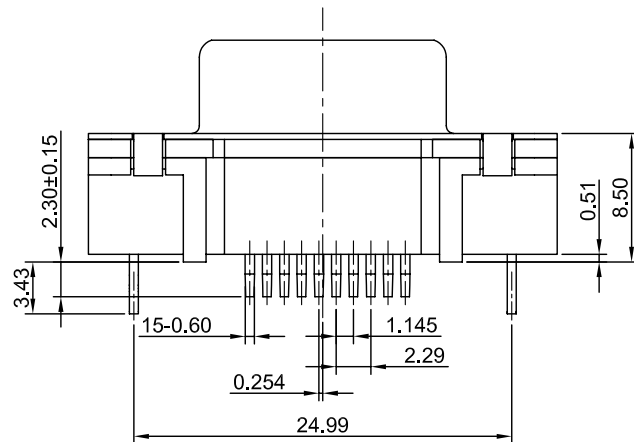

SECTION : A-A

MATERIAL:

FRONT INSULATOR : PBT, UL 94V-0.

INSULATOR : PBT, UL 94V-0.

CONTACT : PHOSPHOR BRONZE.

CONTACT FINISH : GOLD PLATING AT CONTACT AREA,
100~200u" Sn ALLOY AT TAIL,
OVER 50u" NICKEL OVERALL.

BOARDLOCK : STEEL, 100~200u" Sn ALLOY PLATED.

SHELL : STEEL, 100~200u" Sn ALLOY OR NICKEL PLATED.

SPECIFICATION:

CURRENT RATING : 2 AMP.

DIELECTRIC WITHSTANDING VOLTAGE : 1000V AC FOR 1 MINUTE.

INSULATION RESISTANCE : 1000MΩ MIN. AT 500V DC.

CONTACT RESISTANCE : 15mΩ MAX.

OPERATING TEMPERATURE : -55°C ~ +105°C.

ORDER INFORMATION :

DH16 - 15 2 1 1 B 2 0 0 - R
1 2 3 4 5 6 7 8 9 10

1. SERIES:

2. POSITION:
15PIN

3. CONTACT TYPE/MATERIAL:
2=FEMALE/PHOS. BRONZE

4. CONTACT PLATING:
1=SELECTIVE GOLD FLASH
2=SELECTIVE 5u" GOLD
3=SELECTIVE 10u" GOLD
4=SELECTIVE 15u" GOLD
5=SELECTIVE 20u" GOLD
6=SELECTIVE 30u" GOLD

5. INSULATOR COLOR:
1=BLACK

6. INSULATOR MATERIAL:
B=PBT

7. SHELL PLATING:
1=NICKEL
2=TIN

8. GROUNDING OPTION:
0=W/BOARDLOCK

9. MATING OPTION:
0=4#40 THREAD RIVET

10. GREEN PRODUCT:
R=RoHS COMPLIANT
S=SONY GP COMPLIANT

淮洋有限公司 HUI YANG CO., LTD.
www.hy1688.com.tw TEL:886-2-82618986

GENERAL TOLERANCE
 ± 0.25

ANGLE TOLERANCE $\pm 2^\circ$
RADIUS ± 0.25
HOLE ± 0.13

DRAWN.

TRACY

DATE

09 - 11 - 2007

DRAWING NO.

C-DH0028

CUSTOMER DRAWING

CHECKED.

F. HSU

DATE

09 - 12 - 2007

TITLE.

HIGH DENSITY D-SUB PCB STRAIGHT PROFILE 8.5mm.

APPROVED.

HENRY

DATE

09 - 12 - 2007

PART NO.

DH16-152X1BX00-X

REV

A.1

SIZE
A4

UNIT
mm

SCALE.
2 : 1

SHEET.
1 OF 1

