
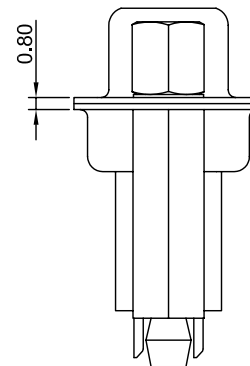
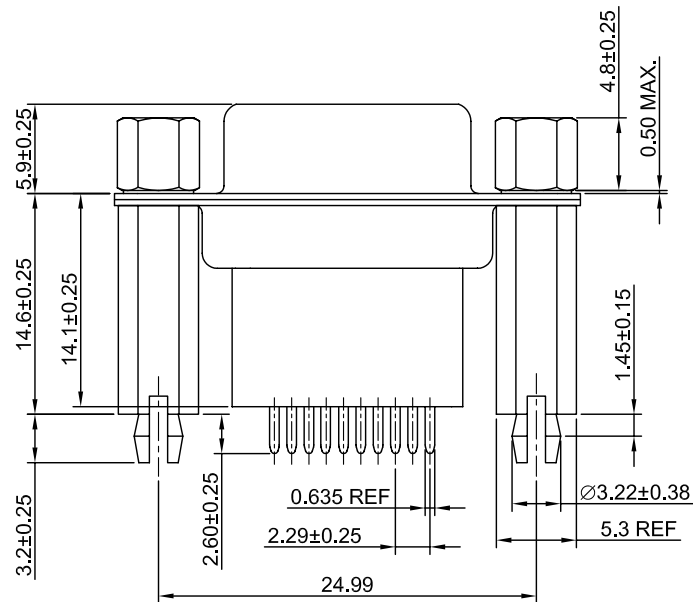
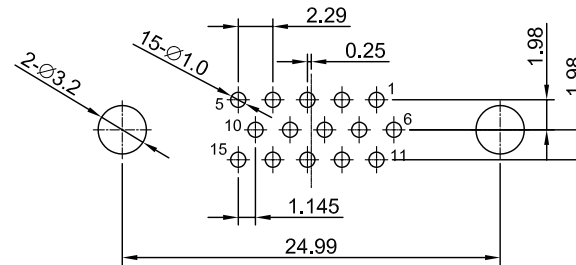


REV.	ECN.	DATE	DWN	APVD

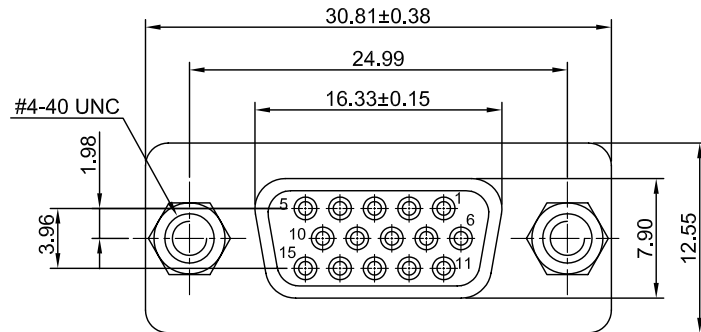

MATERIAL:

FRONT INSULATOR: THERMOPLASTIC,UL94V-0.

BACK INSULATOR: THERMOPLASTIC, UL94V-0.

CONTACT: PHOSPHOR BRONE.

CONTACT FINISH: GOLD PLATING AT CONTCT AREA,
100-200u" TIN AT TALL, OVER 50u"
NICKEL OVERALL.

BOARDLOCK: COPPER ALLOY. TIN PLATED.

FRONT SHELL: STEEL,NICKEL PLATED.

REAR SHELL: STEEL,TIN PLATED.

SCREW: ZINC ALLOY, NICKEL PLATED.

SPECIFICATION:

CURRENT RATING : 2 AMP.

DIELECTRIC WITHSTANDING VOLTAGE : 1000V AC

INSULATION RESISTANCE : 1000MΩ MIN.

CONTACT RESISTANCE : 15mΩ MAX.

OPERATING TEMPERATURE : -55°C ~ +105°C.

ORDER INFORMATION :

DH18 - 15 2 1 1 B 1 3 B - R
1 2 3 4 5 6 7 8 9 10

1. SERIES:

2. POSITION:
15

3. CONTACT TYPE/MATERIAL:
2=FEMALE/PHOS. BRONZE

4. CONTACT PLATING:
1=SELECTIVE GOLD FLASH
4=SELECTIVE 15u" GOLD
6=SELECTIVE 30u" GOLD

5. INSULATOR COLOR:
1=BLACK

6. INSULATOR MATERIAL:
B=PBT

7. SHELL PLATING:
1=NICKEL

8. MATING OPTIONS:
0=Ø3.2mm THRU. HOLE
3=13.8mm HEX BOARDLOCK RIVET

9. OPTIONS:
0=NON ACCESSORIES
4=REAR RIVET 4#40, W/O SCREWS
B=FIXED ZINC ALLOY
HEX-SCREWS 4.8X11.8mm

10. GREEN PRODUCT:
R=RoHS COMPLIANT

淮洋有限公司 HUI YANG CO., LTD.
www.hy1688.com.tw TEL:886-2-82618986

GENERAL TOLERANCE

X. ± 0.50
X.X ± 0.30
X.XX ± 0.20
ANGLE ± 1°

DRAWN.

TRACY

DATE

11 - 27 - 2007

DRAWING NO.

C-DH0033

CUSTOMER DRAWING

CHECKED.

F. HSU

DATE

11 - 28 - 2007

TITLE.

H-D D-SUB PCB STRAIGHT HIGH PROFILE 15PIN FEMALE

APPROVED.

HENRY

DATE

11 - 28 - 2007

PART NO.

DH18-152X1B13B-R

REV

A.0

SIZE	UNIT	SCALE.	SHEET.	
A4	mm	2 : 1	1 OF 1	