

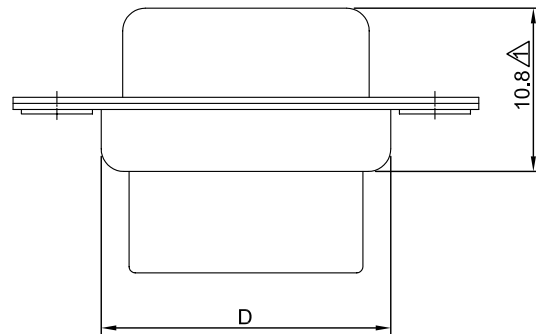


REV.	ECN.	DATE	DWN	APVD
A.1	ECN-080117-01	02/20/08	TRACY	HENRY

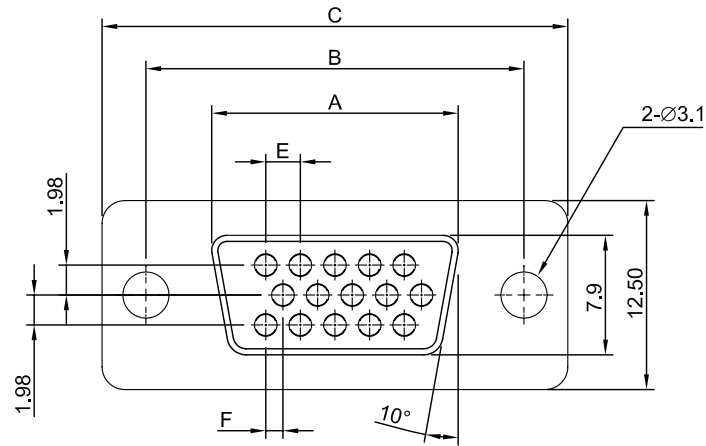

MATERIAL:

FRONT INSULATOR : PBT, UL 94V-0.

BACK INSULATOR : NYLON, UL 94V-0.

SHELL : STEEL, NICKEL OR TIN PLATED.

SPECIFICATION:

INSULATION RESISTANCE : 1000MΩ MIN. AT 500V DC.

OPERATING TEMPERATURE : -55°C ~ +105°C.

ORDER INFORMATION :

DH71 - 1 5 0 0 1 B 2 0 0 0 - R
1 2 3 4 5 6 7 8 9 10

- | | |
|------------------------------|------------------------|
| 1. SERIES: | 7. PROCESS OPTION: |
| 2. POSITION: | 0=THRU. HOLE |
| 15 26 44 62 | 1=4.0mm OPEN HEX RIVET |
| 3. CONTACT TYPE: | 2=5.8mm OPEN HEX RIVET |
| 0=FEMALE | 8. PARTS OPTION: |
| 1=MALE | 0=NON ACCESSORIES |
| 4. INSULATOR COLOR: | 1=REAR RIVET+FIXED |
| 1=BLACK | SCREWS 4.8X10.1mm |
| 5. FRONT INSULATOR MATERIAL: | 4=REAR RIVET 4#40 |
| B=PBT | 7=FRONT RIVET 4#40 |
| 6. SHELL PLATING: | 9. INNER PACKING: |
| 2=TIN | 0=IN TRAY |
| 3=ZINC | 3=IN PLASTIC BAG |
| 5=NICKEL(FRONT SHELL), | 10. GREEN PRODUCT: |
| TIN(BACK SHELL) | R=RoHS COMPLIANT |

POSITION	A ± 0.20	B ± 0.20	C ± 0.38	D ± 0.20	E	F
15 PIN	16.30	25.00	30.80	19.15	2.29	1.14
26PIN	24.60	33.30	39.20	27.60	2.29	1.14
44PIN	38.35	47.05	53.05	41.10	2.29	1.14
62PIN	54.80	63.50	69.40	57.40	2.41	1.20




淮 洋 有 限 公 司 HUAI YANG CO., LTD.
www.hy1688.com.tw TEL:886-2-82618986

GENERAL TOLERANCE
X.X ± 0.25
X.XX ± 0.15
X.XXX ± 0.05
ANGLE TOLERANCE ± 1°
RADIUS ± 0.25
HOLE ± 0.13

SIZE	UNIT	SCALE.	SHEET.	
A4	mm	2 : 1	1 OF 1	

DRAWN.	JEAN	DATE	11 - 18 - 2005	DRAWING NO.	C-DH0043	CUSTOMER DRAWING
CHECKED.	HENRY	DATE	11 - 19 - 2005	TITLE.	HIGH DENSITY D-SUB CRIMP TYPE FEMALE	
APPROVED.	HENRY	DATE	11 - 19 - 2005	PART NO.	DH71-XX00XXX00X-R	REV A.1

REV.	ECN.	DATE	DWN	APVD
A.1	ECN-080117-01	02/20/08	TRACY	HENRY

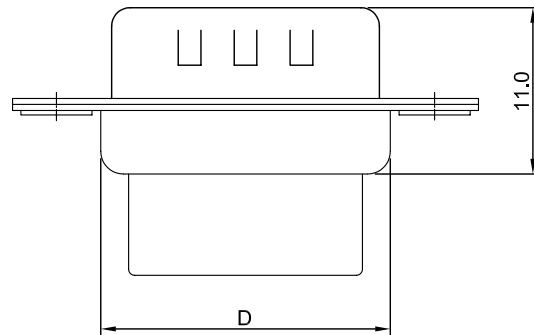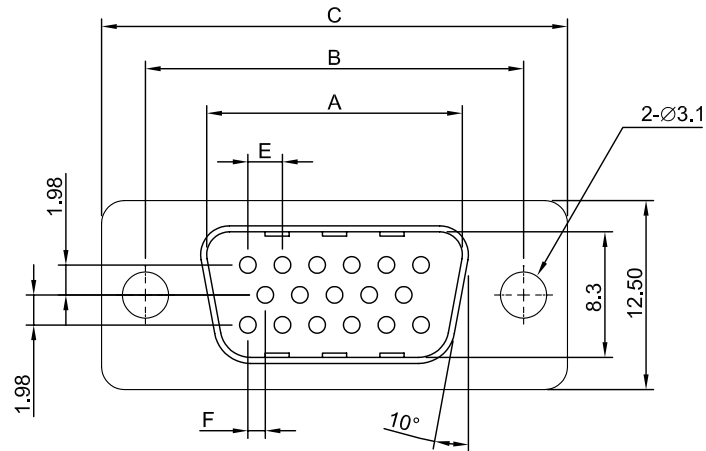

MATERIAL:

FRONT INSULATOR : PBT, UL 94V-0.
BACK INSULATOR : NYLON, UL 94V-0.
SHELL : STEEL, NICKEL OR TIN PLATED.

SPECIFICATION:

INSULATION RESISTANCE : 1000MΩ MIN. AT 500V DC.
OPERATING TEMPERATURE : -55°C ~ +105°C.

ORDER INFORMATION :


D H 7 1 - 1 5 1 0 1 B 1 0 0 0 - R
1 2 3 4 5 6 7 8 9 10

- | | |
|------------------------------|------------------------|
| 1. SERIES: | 7. PROCESS OPTION: |
| 2. POSITION: | 0=THRU. HOLE |
| 15 26 44 62 | 1=4.0mm OPEN HEX RIVET |
| 3. CONTACT TYPE: | 2=5.8mm OPEN HEX RIVET |
| 0=FEMALE | 8. PARTS OPTION: |
| 1=MALE | 0=NON ACCESSORIES |
| 4. INSULATOR COLOR: | 1=REAR RIVET+FIXED |
| 1=BLACK | SCREWS 4.8X10.1mm |
| 5. FRONT INSULATOR MATERIAL: | 4=REAR RIVET 4#40 |
| B=PBT | 7=FRONT RIVET 4#40 |
| 6. SHELL PLATING: | 9. INNER PACKING: |
| 2=TIN | 0=IN TRAY |
| 3=ZINC | 3=IN PLASTIC BAG |
| 5=NICKEL(FRONT SHELL), | 10. GREEN PRODUCT: |
| TIN(BACK SHELL) | R=RoHS COMPLIANT |

POSITION	A ± 0.20	B ± 0.20	C ± 0.38	D ± 0.20	E	F
15 PIN	16.90	25.00	30.80	19.15	2.29	1.14
26PIN	25.25	33.30	39.20	27.60	2.29	1.14
44PIN	38.95	47.05	53.05	41.10	2.29	1.14
62PIN	55.40	63.50	69.40	57.40	2.41	1.20




淮 洋 有 限 公 司 HUAI YANG CO., LTD.
www.hy1688.com.tw TEL:886-2-82618986

GENERAL TOLERANCE
X.X ± 0.25
X.XX ± 0.15
X.XXX ± 0.05
ANGLE TOLERANCE ± 1°
RADIUS ± 0.25
HOLE ± 0.13



DRAWN.	JEAN	DATE	11 - 18 - 2005	DRAWING NO.	C-DH0044	CUSTOMER DRAWING
CHECKED.	HENRY	DATE	11 - 19 - 2005	TITLE.	HIGH DENSITY D-SUB CRIMP TYPE MALE	
APPROVED.	HENRY	DATE	11 - 19 - 2005	PART NO.	DH71-XX10XXX00X-R	REV A.1

REV.	ECN.	DATE	DWN	APVD
A.1	ECN-080117-01	02/20/08	TRACY	HENRY

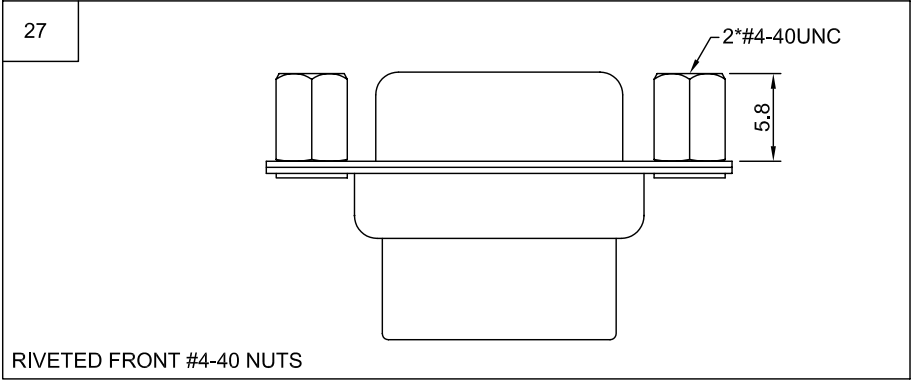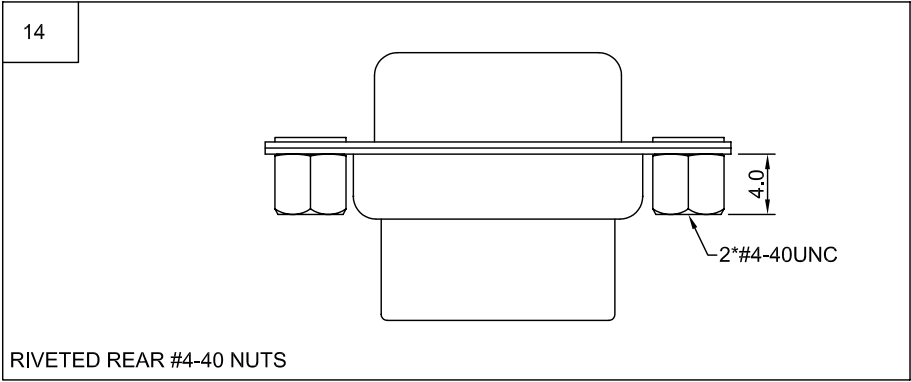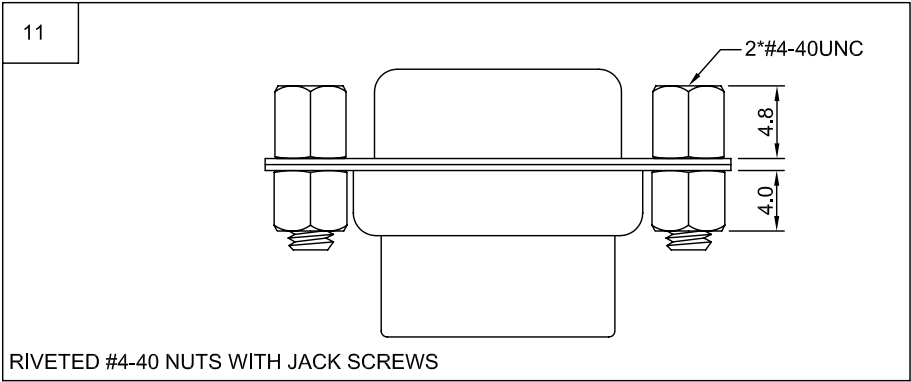

淮 洋 有 限 公 司 H U A I Y A N G C O . , L T D .
 www.hy1688.com.tw TEL:886-2-82618986

GENERAL TOLERANCE
 X.X ± 0.25
 X.XX ± 0.15
 X.XXX ± 0.05
 ANGLE TOLERANCE ± 1°
 RADIUS ± 0.25
 HOLE ± 0.13

DRAWN. JEAN
 CHECKED. HENRY
 APPROVED. HENRY

DATE 11 - 18 - 2005
 DATE 11 - 19 - 2005
 DATE 11 - 19 - 2005

DRAWING NO. C-DH0042
 TITLE. HIGH DENSITY D-SUB CONN CRIMP
 PART NO. DH71-MOUNT

CUSTOMER DRAWING

REV A.1