
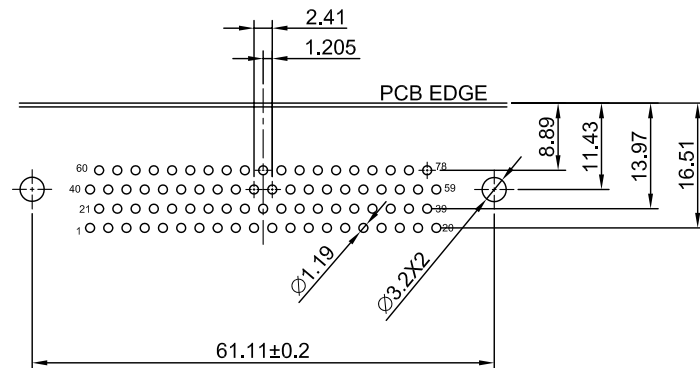
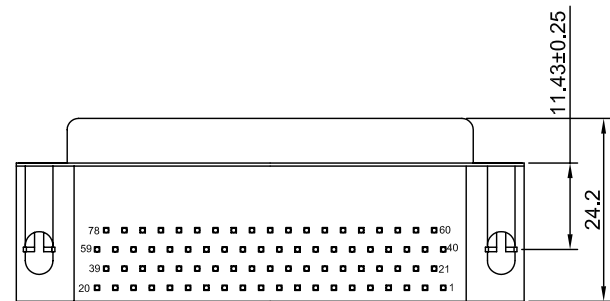



REV.	ECN.	DATE	DWN	APVD
A.1	ECN-070321-01	07/03/29	TRACY	HENRY

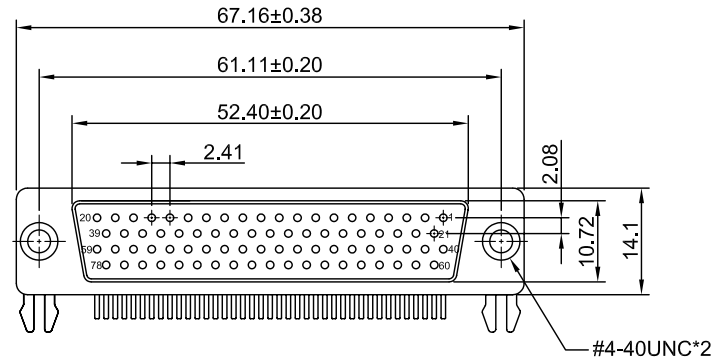

MATERIAL:

INSULATOR : PBT, UL 94V-0,

CONTACT : COPPER ALLOY.

CONTACT FINISH : GOLD ON MATING END, TIN ON TERMINATION END,
WITH ENTIRE CONTACT NICKEL UNDERPLATED.

SHELL : STEEL.

BOARDLOCK : BRASS, TIN PLATED.

RIVETED INSERT : BRASS, NICKEL PLATED.

SPECIFICATION:

CURRENT RATING : 2 AMP

DIELECTRIC WITHSTANDING VOLTAGE : 1000V AC FOR 1 MINUTE.

INSULATION RESISTANCE : 1000MΩ MIN. AT 500V DC.

CONTACT RESISTANCE : 15mΩ MAX.

OPERATING TEMPERATURE : -55°C ~ +105°C.

ORDER INFORMATION :

DH92 - 78 0 1 1 B 1 0 0 - R
1 2 3 4 5 6 7 8 9 10

- | | |
|---------------------------|-------------------------------|
| 1. SERIES: | 7. SHELL PLATING: |
| 2. POSITION: | 1=NICKEL |
| 78=78PIN | 8. GROUNDING OPTION: |
| 3. CONTACT TYPE/MATERIAL: | 0=RIVET W/BOARDLOCK |
| 0=FEMALE/COPPER ALLOY | 5=RIVET ONLY |
| 4. CONTACT PLATING: | 9. MATING OPTION: |
| 1=SELECTIVE GOLD FLASH | 0=4#40 THREAD RIVET |
| 5. INSULATOR COLOR: | 1=FIXED HEX-SCREWS 4.8X11.8mm |
| 1=BLACK | 6=FIXED HEX-SCREWS 5.8X12.8mm |
| 6. INSULATOR MATERIAL: | 7=LOOSE HEX-SCREWS |
| B=PBT | 10. GREEN PRODUCT: |
| | R=RoHS COMPLIANT |

淮洋有限公司 HUI YANG CO., LTD.
www.hy1688.com.tw TEL:886-2-82618986


GENERAL TOLERANCE
X.X ±0.25
X.XX ±0.15
X.XXX ±0.05
ANGLE TOLERANCE ±1°
RADIUS ±0.25
HOLE ±0.13

DRAWN. Peter
CHECKED. HENRY
APPROVED. HENRY





DATE 05 - 10 - 2005
DATE 05 - 13 - 2005
DATE 05 - 13 - 2005

DRAWING NO. C-DH0006
TITLE. HIGH DENSITY D-SUB CONN. RIGHT ANGLE
78PIN FEMALE FOOTPRINT : 8.89mm
PART NO. DH92-78011B100-R
REV A.1

SIZE A4
UNIT mm
SCALE. 1 : 1
SHEET. 1 OF 1



REV.	ECN.	DATE	DWN	APVD
A.1	ECN-070321-01	07/03/29	TRACY	HENRY

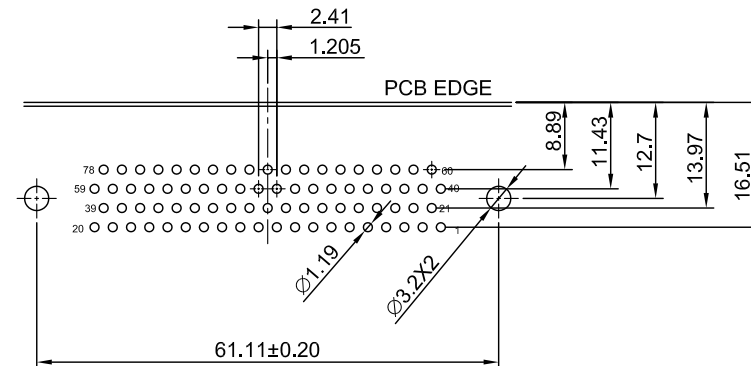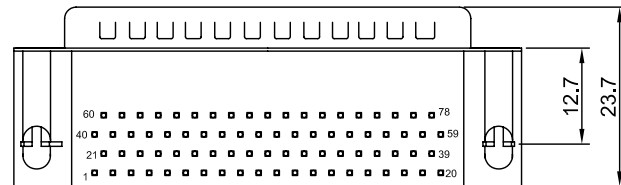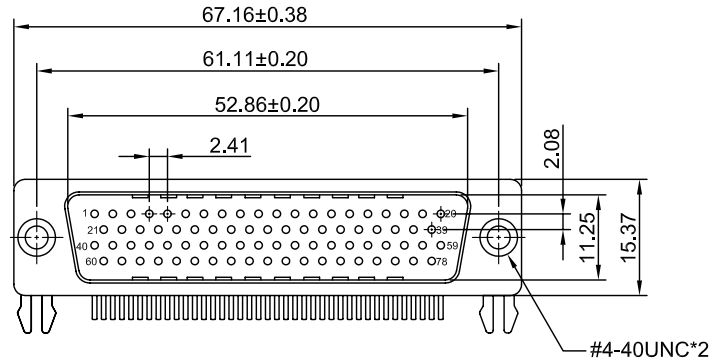

MATERIAL:

INSULATOR : PBT, UL 94V-0,

CONTACT : COPPER ALLOY.

CONTACT FINISH : GOLD ON MATING END, TIN ON TERMINATION END,
WITH ENTIRE CONTACT NICKEL UNDERPLATED.

SHELL : STEEL.

BOARDLOCK : BRASS,TIN PLATED.

RIVETED INSERT : BRASS,NICKEL PLATED.

SPECIFICATION:

CURRENT RATING : 2 AMP

DIELECTRIC WITHSTANDING VOLTAGE : 1000V AC FOR 1 MINUTE.

INSULATION RESISTANCE : 1000MΩ MIN. AT 500V DC.

CONTACT RESISTANCE : 15mΩ MAX.

OPERATING TEMPERATURE : -55°C ~ +105°C.

ORDER INFORMATION :

D H 9 2 - 7 8 1 1 1 B 1 0 0 - R
1 2 3 4 5 6 7 8 9 10

- | | |
|---------------------------|-------------------------------|
| 1. SERIES: | 7. SHELL PLATING: |
| 2. POSITION: | 1=NICKEL |
| 78=78PIN | |
| 3. CONTACT TYPE/MATERIAL: | 8. GROUNDING OPTION: |
| 1=MALE/COPPER ALLOY | 0=RIVET W/BOARDLOCK |
| | 5=RIVET ONLY |
| 4. CONTACT PLATING: | 9. MATING OPTION: |
| 1=SELECTIVE GOLD FLASH | 0=4#40 THREAD RIVET |
| 5. INSULATOR COLOR: | 1=FIXED HEX-SCREWS 4.8X11.8mm |
| 1=BLACK | 6=FIXED HEX-SCREWS 5.8X12.8mm |
| | 7=LOOSE HEX-SCREWS |
| 6. INSULATOR MATERIAL: | 10. GREEN PRODUCT: |
| B=PBT | R=RoHS COMPLIANT |

淮洋有限公司 HUAI YANG CO., LTD.
www.hy1688.com.tw TEL:886-2-82618986

GENERAL TOLERANCE
X.X ±0.25
X.XX ±0.15
X.XXX ±0.05
ANGLE TOLERANCE ±1°
RADIUS ±0.25
HOLE ±0.13

DRAWN. Peter
CHECKED. HENRY
APPROVED. HENRY

DATE 05 - 10 - 2005
DATE 05 - 12 - 2005
DATE 05 - 12 - 2005

DRAWING NO. C-DH0007
TITLE. HIGH DENSITY D-SUB CONN. RIGHT ANGLE
78PIN MALE FOOTPRINT : 8.89mm
PART NO. DH92-78111B100-R
REV A.1

SIZE A4
UNIT mm
SCALE. 1 : 1
SHEET. 1 OF 1

