
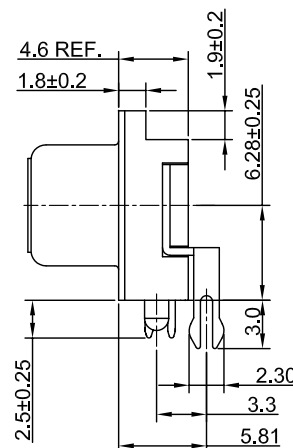


REV.	ECN.	DATE	DWN	APVD

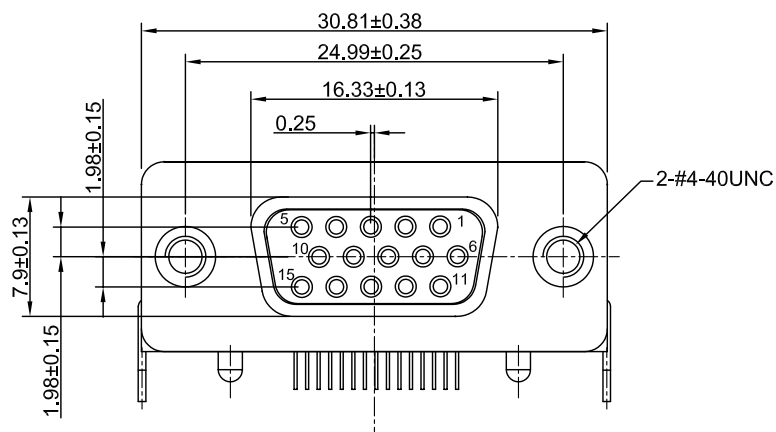

MATERIAL:

INSULATOR : THERMOPLASTIC, UL 94V-0.

STANDARD : NYLON.

CONTACT : BRASS.

CONTACT FINISH : GOLD ON MATING END, TIN ON TERMINATION END,
WITH ENTIRE CONTACT NICKEL UNDERPLATED.

SHELL : STEEL.

BOARDLOCKS : BRASS, TIN PLATED.

RIVETED INSERT : BRASS, NICKEL PLATED.

SPECIFICATION:



CURRENT RATING : 2.5 AMP MAX.

DIELECTRIC WITHSTANDING VOLTAGE : 500V AC FOR 1 MINUTE.

INSULATION RESISTANCE : 1000MΩ MIN. AT 500V DC.

CONTACT RESISTANCE : 20mΩ MAX.

TEMPERATURE: -55°C TO +105°C

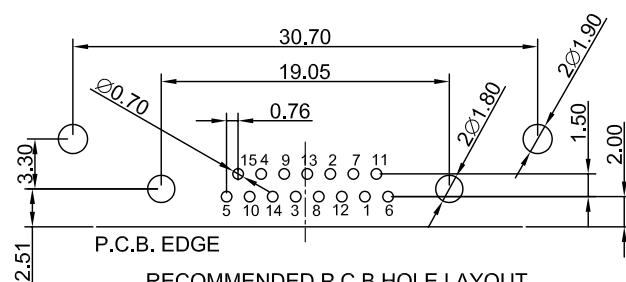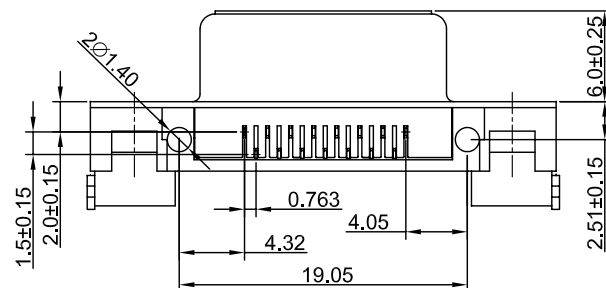

RECOMMENDED P.C.B HOLE LAYOUT
COMPONENT SIDE VIEW(TOLERANCE ±0.05mm)

ORDER INFORMATION :

DH98 - 15 0 1 9 C 1 1 0 - R
1 2 3 4 5 6 7 8 9 10

- SERIES:
- POSITION:
- CONTACT TYPE/MATERIAL:
0=FEMALE/BRASS
- CONTACT PLATING:
1=SELECTIVE GOLD FLASH
4=SELECTIVE 15u" GOLD
6=SELECTIVE 30u" GOLD
7=SELECTIVE 3u" GOLD
- INSULATOR COLOR:
7=BLUE
9=FOR PC99 COLOR
- INSULATOR MATERIAL:
B=PB
C=NYLON
- SHELL PLATING:
1=NICKEL
- CONTACT FOOT POSITION
& GROUNDING OPTION:
0= TYPE 0, RIVET W/BOARDLOCK
1= TYPE 1, RIVET W/BOARDLOCK
- MATING OPTION:
0=4#40 THREAD RIVET
1=FIXED HEX-SCREWS 4.8X11.8mm
6=FIXED HEX-SCREWS 5.8X12.8mm
7=LOOSE HEX-SCREWS
- GREEN PRODUCT:
R=RoHS COMPLIANT



淮洋有限公司 HUI YANG CO., LTD.
www.hy1688.com.tw TEL:886-2-82618986

GENERAL TOLERANCE
X.X ±0.25
X.XX ±0.15
X.XXX ±0.05
ANGLE TOLERANCE ±1°
RADIUS ±0.25
HOLE ±0.13

DRAWN.	MANDY	DATE	09 - 10 - 2008	DRAWING NO.	C-DH0052	CUSTOMER DRAWING
CHECKED.	ALLISON	DATE	09 - 12 - 2008	TITLE.	2.0 mm HIGH DENSITY D-SUB 90° SLIM TYPE, DIP, TERMINAL ROW DIM. 1.5mm TYPE 1	
APPROVED.	HENRY	DATE	09 - 16 - 2008	PART NO.	DH98-150XXX11X-R	REV A.0

SIZE A4	UNIT mm	SCALE. 2 : 1	SHEET. 1 OF 1	
------------	------------	-----------------	------------------	--

REV.	ECN.	DATE	DWN	APVD

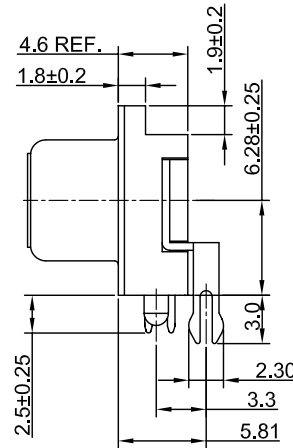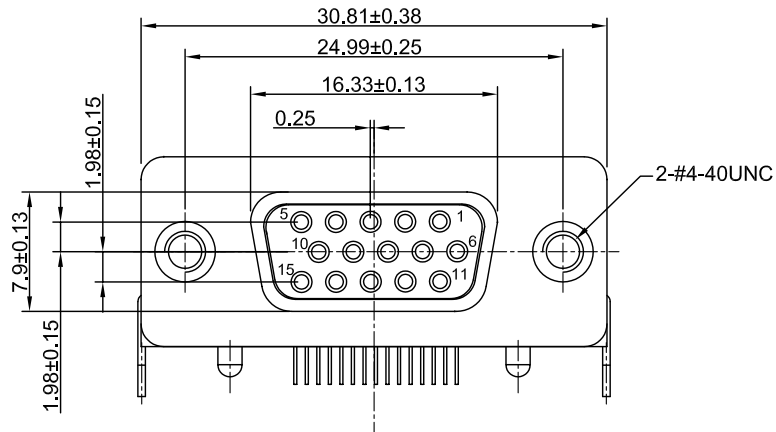

MATERIAL:

INSULATOR : THERMOPLASTIC, UL 94V-0.

STANDARD : NYLON.

CONTACT : BRASS.

CONTACT FINISH : GOLD ON MATING END, TIN ON TERMINATION END,
WITH ENTIRE CONTACT NICKEL UNDERPLATED.

SHELL : STEEL.

BOARDLOCKS : BRASS, TIN PLATED.

RIVETED INSERT : BRASS, NICKEL PLATED.

SPECIFICATION:



CURRENT RATING : 2.5 AMP MAX.

DIELECTRIC WITHSTANDING VOLTAGE : 500V AC FOR 1 MINUTE.

INSULATION RESISTANCE : 1000MΩ MIN. AT 500V DC.

CONTACT RESISTANCE : 20mΩ MAX.

TEMPERATURE: -55°C TO +105°C

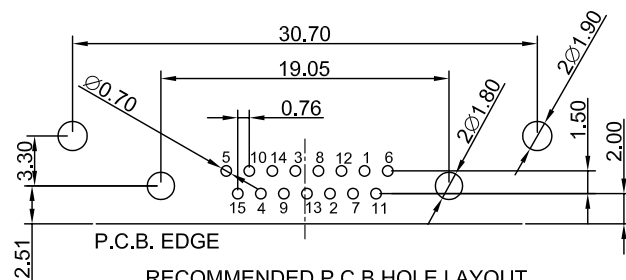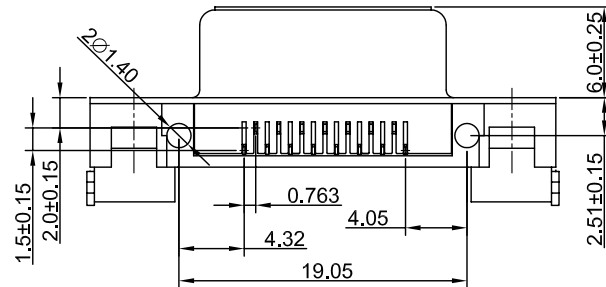

ORDER INFORMATION :

DH98 - 15 0 1 9 C 1 0 0 - R
1 2 3 4 5 6 7 8 9 10

- | | |
|---------------------------|-------------------------------|
| 1. SERIES: | 7. SHELL PLATING: |
| 2. POSITION: | 1=NICKEL |
| 3. CONTACT TYPE/MATERIAL: | 8. CONTACT FOOT POSITION |
| 0=FEMALE/BRASS | & GROUNDING OPTION: |
| 4. CONTACT PLATING: | 0= TYPE 0, RIVET W/BOARDLOCK |
| 1=SELECTIVE GOLD FLASH | 1= TYPE 1, RIVET W/BOARDLOCK |
| 4=SELECTIVE 15u" GOLD | 9. MATING OPTION: |
| 6=SELECTIVE 30u" GOLD | 0=4#40 THREAD RIVET |
| 7=SELECTIVE 3u" GOLD | 1=FIXED HEX-SCREWS 4.8X11.8mm |
| 5. INSULATOR COLOR: | 6=FIXED HEX-SCREWS 5.8X12.8mm |
| 7=BLUE | 7=LOOSE HEX-SCREWS |
| 9=FOR PC99 COLOR | 10. GREEN PRODUCT: |
| 6. INSULATOR MATERIAL: | R=RoHS COMPLIANT |
| B=PB | |
| C=NYLON | |

淮洋有限公司 HUAI YANG CO., LTD.
www.hy1688.com.tw TEL:886-2-82618986

GENERAL TOLERANCE
X.X ±0.25
X.XX ±0.15
X.XXX ±0.05
ANGLE TOLERANCE ±1°
RADIUS ±0.25
HOLE ±0.13

DRAWN.	MANDY	DATE	09 - 12 - 2008	DRAWING NO.	C-DH0053	CUSTOMER DRAWING
CHECKED.	ALLISON	DATE	09 - 12 - 2008	TITLE.	2.0 mm HIGH DENSITY D-SUB 90° SLIM TYPE, DIP, TERMINAL ROW DIM. 1.5mm TYPE 0	
APPROVED.	HENRY	DATE	09 - 16 - 2008	PART NO.	DH98-150XXX10X-R	REV A.0

SIZE A4	UNIT mm	SCALE. 2 : 1	SHEET. 1 OF 1	
------------	------------	-----------------	------------------	--