


REV.	ECN.	DATE	DWN	APVD

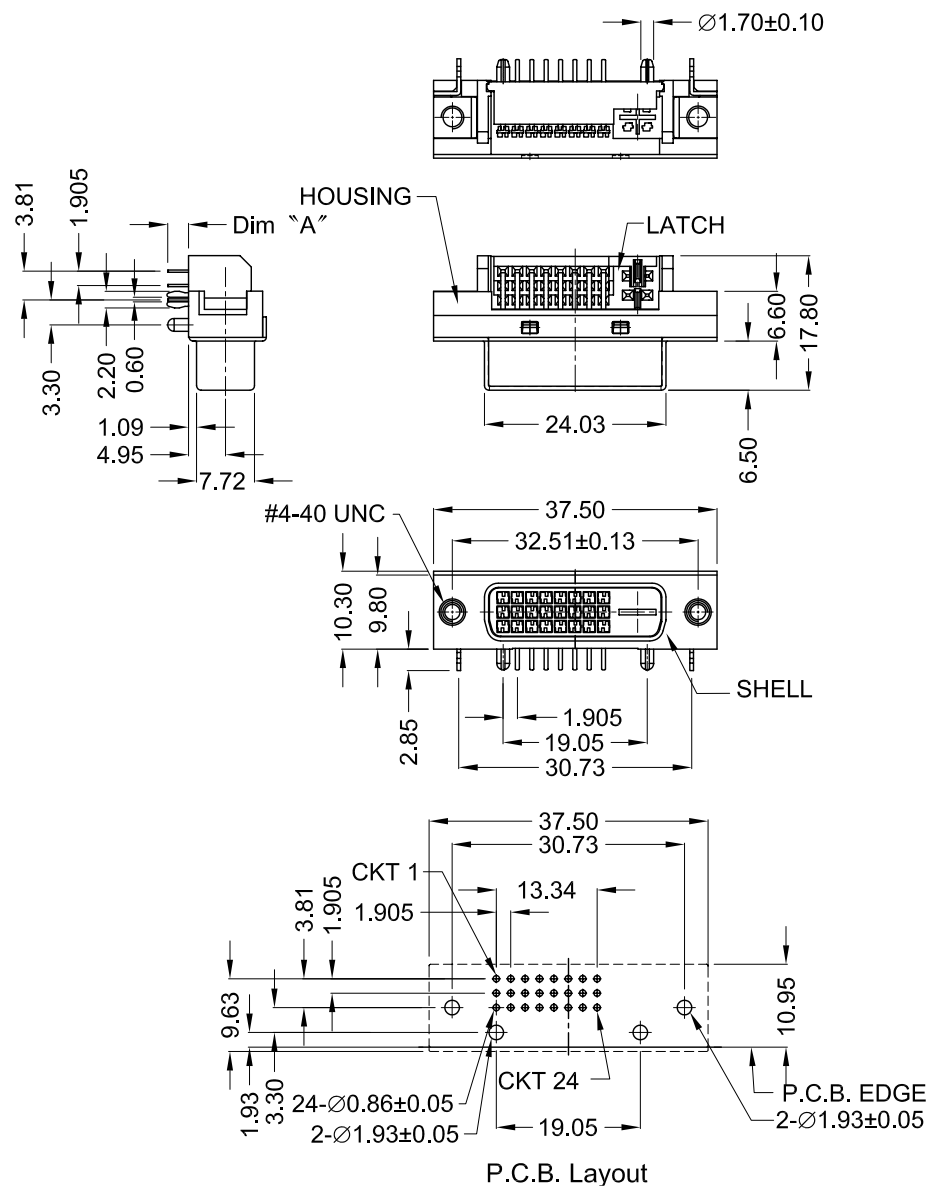

MATERIAL:

INSULATOR : NYLON 66+30%GF UL94V-0

CONTACT : COPPER ALLOY

CONTACT FINISH : GOLD PLATING OVER NICKEL ON CONTACT AREA, TIN PLATING ON SOLDER TAIL.

BOARDLOCK: BRASS, TIN PLATED

SPECIFICATION:

CURRENT RATING : 1.5 AMP

DIELECTRIC WITHSTANDING : 500V DC RMS.

INSULATION RESISTANCE : 1000 MΩ MIN.

CONTACT RESISTANCE : 20mΩ MAX.

OPERATING TEMPERATURE : -20°C ~ +85°C.

ORDER INFORMATION :

DV91 - 24 0 1 N C 1 0 0 - R
1 2 3 4 5 6 7 8 9 10

- SERIES NUMBER:
- POSITION :
24
- CONTACT TYPE:
0=FEMALE
- CONTACT PLATING:
1= SELECTIVE GOLD FLASH
2= SELECTIVE 5u" GOLD
3= SELECTIVE 10u" GOLD
4= SELECTIVE 15u" GOLD
- INSULATOR COLOR:
N=NATURE
- INSULATOR MATERIAL:
C=NYLON
- SHELL PLATING:
1=NICKEL
- MOUNTING OPTION:
0=RIVET WITH BOARD LOCK,DIM A=2.75
1=RIVET WITH BOARD LOCK,DIM A=3.30
- MATING OPTION:
0=4-40 THREADED RIVETED
- GREEN PRODUCT:
R=RoHS COMPLIANT

淮 洋 有 限 公 司 HUAI YANG CO., LTD.
www.hy1688.com.tw TEL:886-2-82618986

GENERAL TOLERANCE
X.X ± 0.38
X.XX ± 0.25
X.XXX ± 0.20
ANGLE TOLERANCE ± 3°


DRAWN. TRACY
CHECKED. HENRY
APPROVED. HENRY

DATE 07 - 11 - 2006
DATE 07 - 25 - 2006
DATE 07 - 25 - 2006

DRAWING NO. DV91-240XNC1X0-R C08012
TITLE. DVI CONN. PCB RIGHT ANGLE TYPE 24 PIN FEMALE
PART NO. DV91-240XNC1X0-R REV A.0

SIZE A4 UNIT mm SCALE. SHEET. 1 OF 1

REV.	ECN.	DATE	DWN	APVD
A.1	ECN-070424-01	07/04/25	TRACY	HENRY

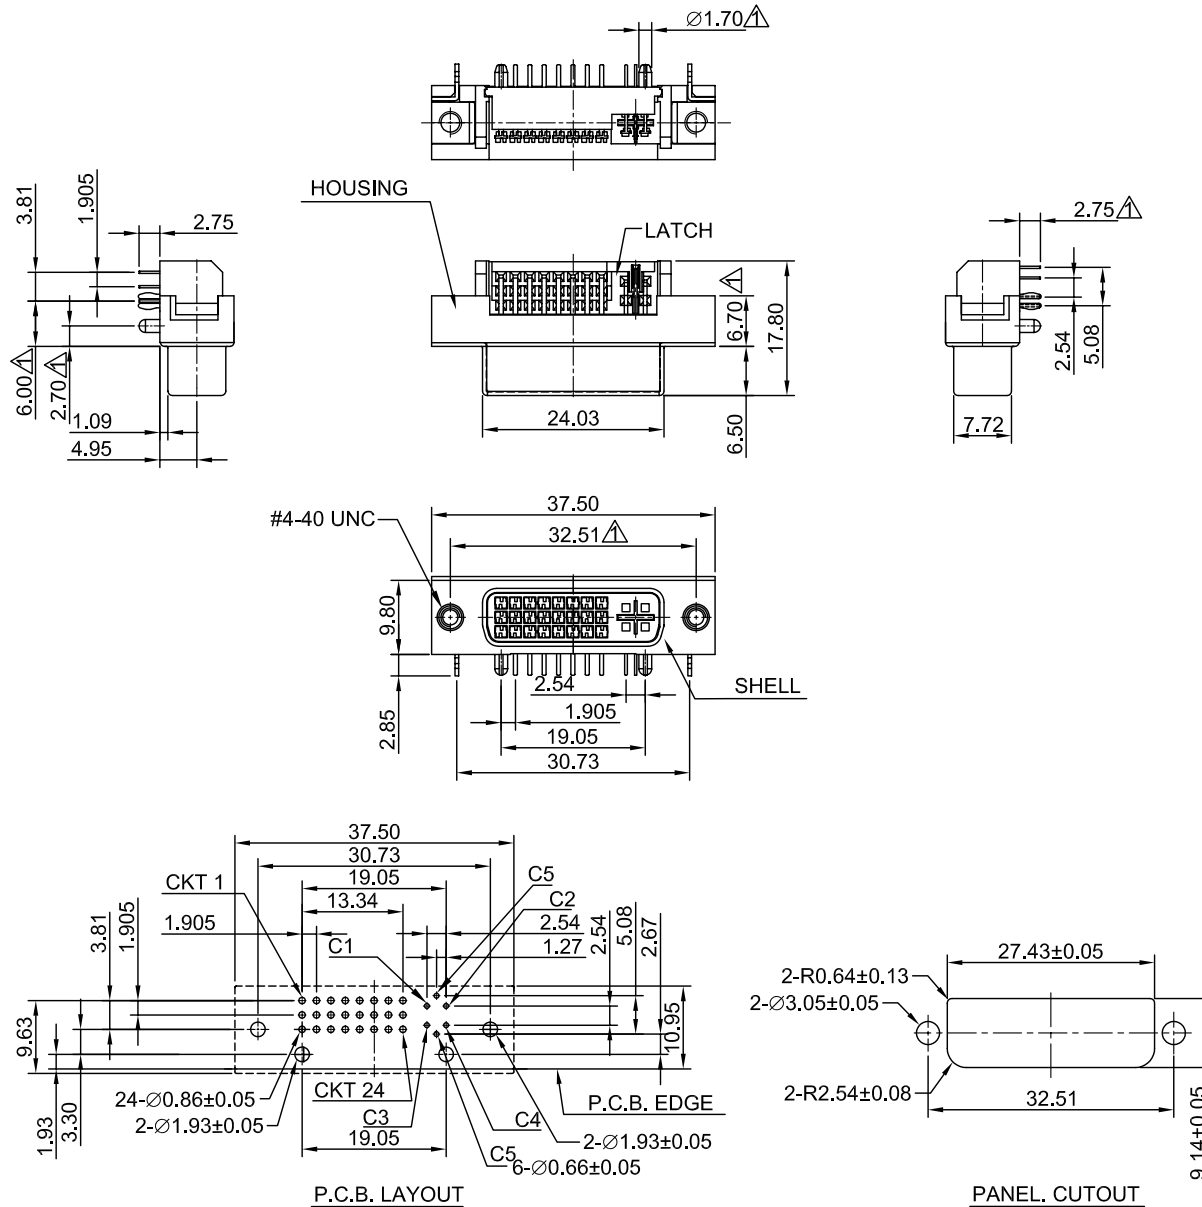

MATERIAL:

INSULATOR : NYLON 66+30%GF UL94V-0

CONTACT : COPPER ALLOY

CONTACT FINISH : GOLD PLATING OVER NICKEL ON CONTACT AREA, TIN PLATING ON SOLDER TAIL.

BOARDLOCK: BRASS, TIN PLATED

SPECIFICATION:

CURRENT RATING : 1.5 AMP

DIELECTRIC WITHSTANDING : 500V DC RMS.

INSULATION RESISTANCE : 1000 MΩ MIN.

CONTACT RESISTANCE : 20mΩ MAX.

OPERATING TEMPERATURE : -20°C ~ +85°C.

ORDER INFORMATION :

D V 9 1 - 2 9 0 1 N C 1 0 0 - R
1 2 3 4 5 6 7 8 9 10

- | | |
|---|--|
| 1. SERIES: | 6. INSULATOR MATERIAL:
C=NYLON |
| 2. POSITION :
29=29PIN | 7. SHELL PLATING:
1=NICKEL |
| 3. CONTACT TYPE/MATERIAL:
0=FEMALE/COPPER ALLOY | 8. MOUNTING OPTION:
0=RIVET WITH BOARD LOCK |
| 4. CONTACT PLATING:
1= SELECTIVE GOLD FLASH
2= SELECTIVE 5u" GOLD
3= SELECTIVE 10u" GOLD
4= SELECTIVE 15u" GOLD | 9. MATING OPTION:
0=4-40 THREADED RIVETED |
| 5. INSULATOR COLOR:
N=NATURE | 10. GREEN PRODUCT:
R=RoHS COMPLIANT |

淮洋有限公司 HUI YANG CO., LTD.
www.hy1688.com.tw TEL:886-2-82618986

GENERAL TOLERANCE
X.X ± 0.38
X.XX ± 0.25
X.XXX ± 0.20
ANGLE TOLERANCE ± 3°

DRAWN.	TRACY	DATE	07 - 11 - 2006
CHECKED.	HENRY	DATE	07 - 25 - 2006
APPROVED.	HENRY	DATE	07 - 25 - 2006

DRAWING NO.	C-DV0003	CUSTOMER DRAWING
TITLE.	DVI CONN. PCB RIGHT ANGLE TYPE 29 PIN FEMALE	
PART NO.	DV91-290XNC100-R	REV A.1