


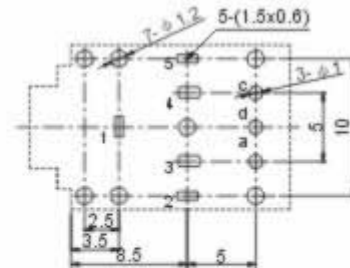



PJ3007A 3.5mm PHONE JACK



P.C.B Layout(copper-sided view)



P/N	PJ3007A-A PJ3007D-A	PJ3007A-B PJ3007D-B	PJ3007A-C PJ3007D-C	PJ3007A-D PJ3007D-D
Schematic				

技術指標：			
使用溫度範圍	-30-70℃	耐壓	AC500V(50Hz)/min
額定負荷	DC 30V 0.5A	動作力	3~20N
接觸電阻	≤0.03Ω	壽命	5000 次
絕緣電阻	≥100MΩ		