

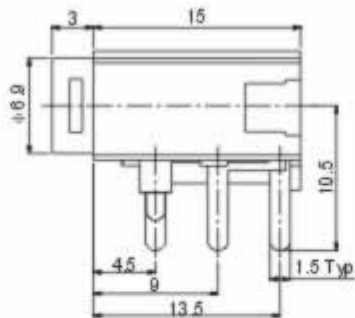



PJ3015A 3.5mm PHONE JACK



P.C.B Layout(copper-side view)

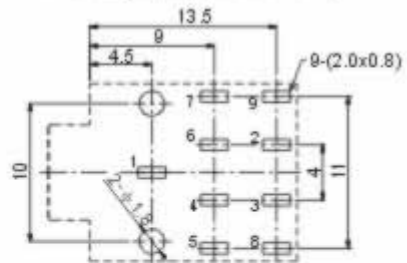

Model No.	PJ30150-A PJ3015A-A	PJ30150-B PJ3015A-B	PJ30150-F PJ3015A-F	PJ30150-G PJ3015A-G	PJ30150-H/V PJ3015A-V/U	PJ30150-K PJ3015A-K	PJ30150-L PJ3015A-L	PJ30150-M PJ3015A-M	PJ30150-B PJ3015A-B	PJ30150-T PJ3015A-T
Schematic										

技術指標：			
使用溫度範圍	-30-70℃	耐壓	AC500V(50Hz)/min
額定負荷	DC 30V 0.5A	動作力	3~20N
接觸電阻	≤0.03Ω	壽命	5000 次
絕緣電阻	≥100MΩ		