
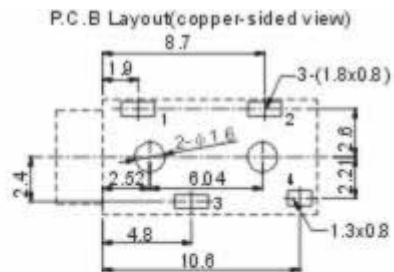





PJ3027I **3.5mm PHONE JACK**



H=0.9	PJ3027 X-B	PJ3027 X-C	PJ3027 X-D
H=1.6	PJ3027 D-B	PJ3027 D-C	PJ3027 D-D
H=2.1	PJ3027 O-B	PJ3027 O-C	PJ3027 O-D
H=2.6	PJ3027 I-B	PJ3027 I-C	PJ3027 I-D
Schematic			

技術指標：			
使用溫度範圍	-30-70℃	耐壓	AC500V(50Hz)/min
額定負荷	DC 30V 0.5A	動作力	3~20N
接觸電阻	≤0.03 Ω	壽命	5000 次
絕緣電阻	≥100M Ω		