
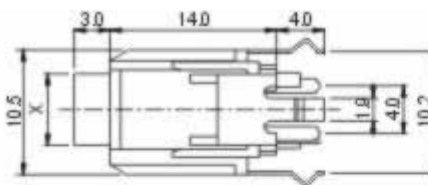


PJ30340 3.5mm PHONE JACK

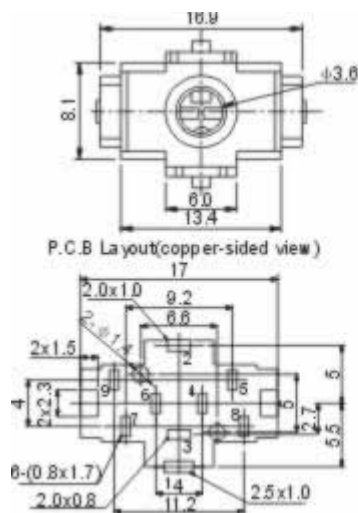

X= : 6.0	PJ30340-A	PJ30340-B	PJ30340-C	PJ30340-D	PJ30340-E	PJ30340-F	PJ30340-G	PJ30340-H	PJ30340-K
X= : 7.0	PJ3034A-A	PJ3034A-B	PJ3034A-C	PJ3034A-D	PJ3034A-E	PJ3034A-F	PJ3034A-G	PJ3034A-H	PJ3034A-K
Schematic									
X= : 6.0	PJ30340-L	PJ30340-M	PJ30340-N	PJ30340-P	PJ30340-Q	PJ30340-R	PJ30340-S	PJ30340-T	PJ30340-V
X= : 7.0	PJ3034A-L	PJ3034A-M	PJ3034A-N	PJ3034A-P	PJ3034A-Q	PJ3034A-R	PJ3034A-S	PJ3034A-T	PJ3034A-V
Schematic									

技術指標：			
使用溫度範圍	-30-70℃	耐壓	AC500V(50Hz)/min
額定負荷	DC 30V 0.5A	動作力	3~20N
接觸電阻	≤0.03 Ω	壽命	5000 次
絕緣電阻	≥100MΩ		