
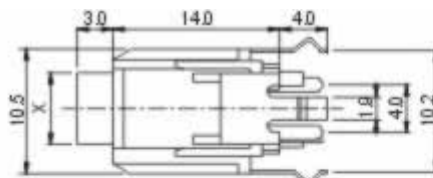


## PJ3034A 3.5mm PHONE JACK

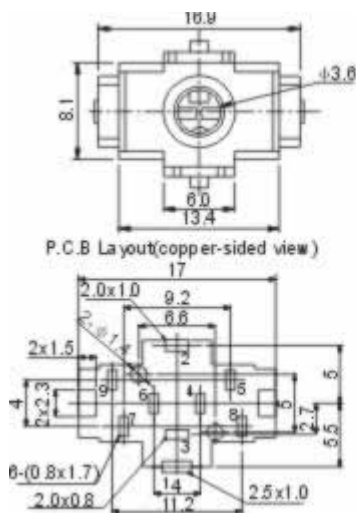

|           |           |           |           |           |           |           |           |           |           |
|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|
| X= : 6.0  | PJ3034A-A | PJ3034A-B | PJ3034A-C | PJ3034A-D | PJ3034A-E | PJ3034A-F | PJ3034A-G | PJ3034A-H | PJ3034A-K |
| X= : 7.0  | PJ3034A-A | PJ3034A-B | PJ3034A-C | PJ3034A-D | PJ3034A-E | PJ3034A-F | PJ3034A-G | PJ3034A-H | PJ3034A-K |
| Schematic |           |           |           |           |           |           |           |           |           |
| X= : 6.0  | PJ3034A-L | PJ3034A-M | PJ3034A-N | PJ3034A-P | PJ3034A-Q | PJ3034A-R | PJ3034A-S | PJ3034A-T | PJ3034A-W |
| X= : 7.0  | PJ3034A-L | PJ3034A-M | PJ3034A-N | PJ3034A-P | PJ3034A-Q | PJ3034A-R | PJ3034A-S | PJ3034A-T | PJ3034A-W |
| Schematic |           |           |           |           |           |           |           |           |           |

|        |             |     |                  |
|--------|-------------|-----|------------------|
| 技術指標：  |             |     |                  |
| 使用溫度範圍 | -30-70℃     | 耐壓  | AC500V(50Hz)/min |
| 額定負荷   | DC 30V 0.5A | 動作力 | 3~20N            |
| 接觸電阻   | ≤0.03 Ω     | 壽命  | 5000 次           |
| 絕緣電阻   | ≥100MΩ      |     |                  |