


PJ3034B 3.5mm PHONE JACK

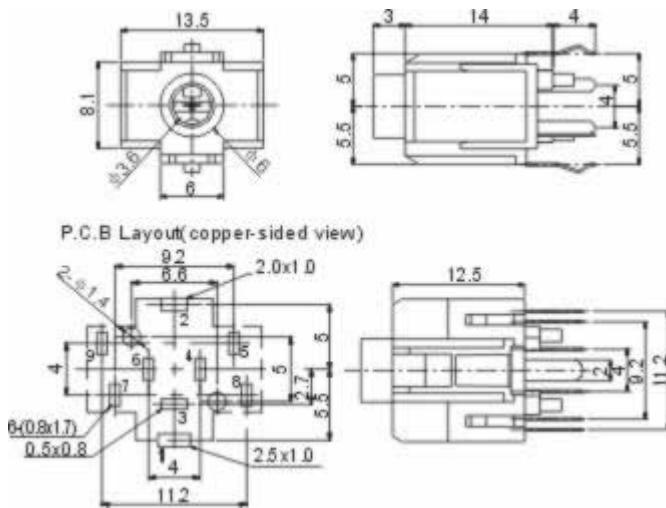

Model No.	PJ3034B-A	PJ3034B-B	PJ3034B-C	PJ3034B-D	PJ3034B-E
Schematic					
Model No.	PJ3034B-F	PJ3034B-G	PJ3034B-H	PJ3034B-I	PJ3034B-J
Schematic					
Model No.	PJ3034B-K	PJ3034B-L	PJ3034B-M	PJ3034B-N	PJ3034B-O
Schematic					
Model No.	PJ3034B-P	PJ3034B-Q	PJ3034B-R	PJ3034B-S	PJ3034B-T
Schematic					

技術指標：			
使用溫度範圍	-30-70℃	耐壓	AC500V(50Hz)/min
額定負荷	DC 30V 0.5A	動作力	3~20N
接觸電阻	≤0.03Ω	壽命	5000 次
絕緣電阻	≥100MΩ		