
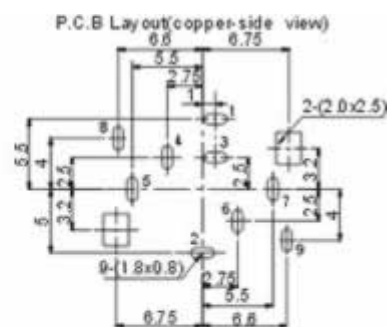
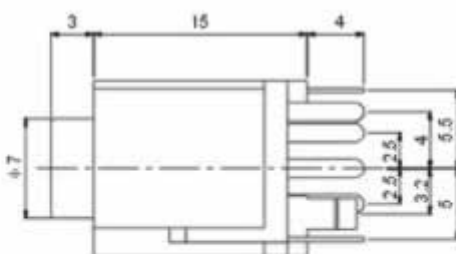


## **PJ30460** **3.5mm PHONE JACK**

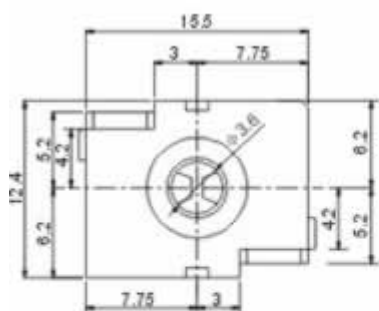

| Model No. | PJ30460-A | PJ30460-B | PJ30460-D | PJ30460-F | PJ30460-G | PJ30460-W | PJ30460-K | PJ30460-N | PJ30460-L |
|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|
| Schematic |           |           |           |           |           |           |           |           |           |

|        |             |     |                  |
|--------|-------------|-----|------------------|
| 技術指標：  |             |     |                  |
| 使用溫度範圍 | -30-70℃     | 耐壓  | AC500V(50Hz)/min |
| 額定負荷   | DC 30V 0.5A | 動作力 | 3~20N            |
| 接觸電阻   | ≤0.03 Ω     | 壽命  | 5000 次           |
| 絕緣電阻   | ≥100MΩ      |     |                  |