
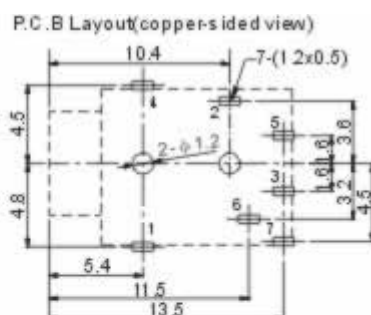
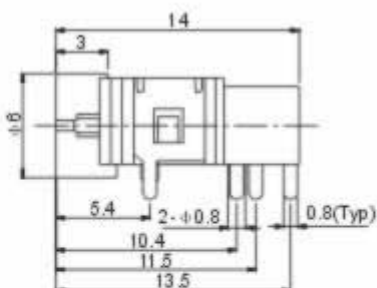





PJ30620 3.5mm PHONE JACK



L=2.0	PJ30620-G	PJ30620-H	PJ30620-J	PJ30620-M	PJ30620-D	PJ30630-I	PJ30630-Y
L=2.5	PJ30621-G	PJ30621-H	PJ30621-J	PJ30621-M	PJ30621-D	PJ30631-I	PJ30631-Y
L=3.0	PJ3062A-G	PJ3062A-H	PJ3062A-J	PJ3062A-M	PJ3062A-D	PJ3063A-I	PJ3063A-Y
Schematic:							

技術指標：			
使用溫度範圍	-30-70℃	耐壓	AC500V(50Hz)/min
額定負荷	DC 30V 0.5A	動作力	3~20N
接觸電阻	≤0.03 Ω	壽命	5000 次
絕緣電阻	≥100MΩ		