

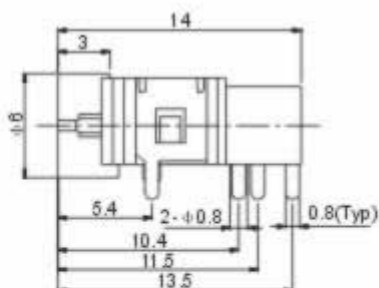


PJ3062L 3.5mm PHONE JACK



P.C.B Layout(copper-sided view)

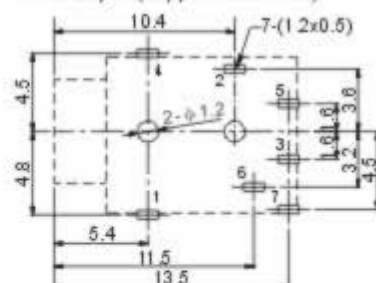

L=2.0	PJ30620-G	PJ30620-H	PJ30620-J	PJ30620-M	PJ30620-D	PJ30630-I	PJ30630-Y
L=2.5	PJ3062L-G	PJ3062L-H	PJ3062L-J	PJ3062L-M	PJ3062L-D	PJ3063L-I	PJ3063L-Y
L=3.0	PJ3062A-G	PJ3062A-H	PJ3062A-J	PJ3062A-M	PJ3062A-D	PJ3063A-I	PJ3063A-Y
Schematic							

技術指標：			
使用溫度範圍	-30-70℃	耐壓	AC500V(50Hz)/min
額定負荷	DC 30V 0.5A	動作力	3~20N
接觸電阻	≤0.03Ω	壽命	5000 次
絕緣電阻	≥100MΩ		