


## **PJ3081A** **3.5mm PHONE JACK**

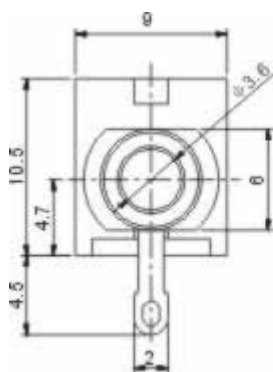

|           |            |                                                                                       |
|-----------|------------|---------------------------------------------------------------------------------------|
| Model No. | A=φ6       | PJ300 10-C                                                                            |
|           | A=M6x P0.5 | PJ300 1M-C                                                                            |
| Schematic |            |  |

|        |             |     |                  |
|--------|-------------|-----|------------------|
| 技術指標：  |             |     |                  |
| 使用溫度範圍 | -30-70℃     | 耐壓  | AC500V(50Hz)/min |
| 額定負荷   | DC 30V 0.5A | 動作力 | 3~20N            |
| 接觸電阻   | ≤0.03Ω      | 壽命  | 5000 次           |
| 絕緣電阻   | ≥100MΩ      |     |                  |