




淮 洋 有 限 公 司 HUI YANG CO.,LTD.

TEL : 886-2-8261-8986 FAX : 886-2-8261-1885

www.hy1688.com.tw 236新北市土城區中央路二段191號10樓之5

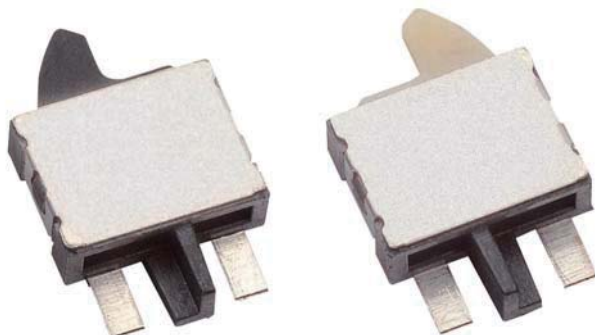

Feature -

small size
SMT reflow soldering


Application -

mechanisms or detection of
media in portable equipments
(MD / CD-ROM / DVD players)
operation switches


► SPECIFICATIONS

SWITCH SPECIFICATIONS	
POLE - POSITION	Momentary action , 1P1T
CONTACT RATING	5 V DC , 10 mA
CONTACT RESISTANCE	1 Ω MAX. 1.5 V DC ; 100 mA , by Method of Voltage DROP
INSULATION RESISTANCE	100 M Ω MIN. 100 V DC
DIELECTRIC STRENGTH	Breakdown is not Allowable ; 100 V AC for 1 Minute
OPERATING FORCE	30 gf MAX.
OPERATING LIFE	50,000 cycles
OPERATING TEMPERATURE RANGE	-20°C ~ 70°C

► HOW TO ORDER

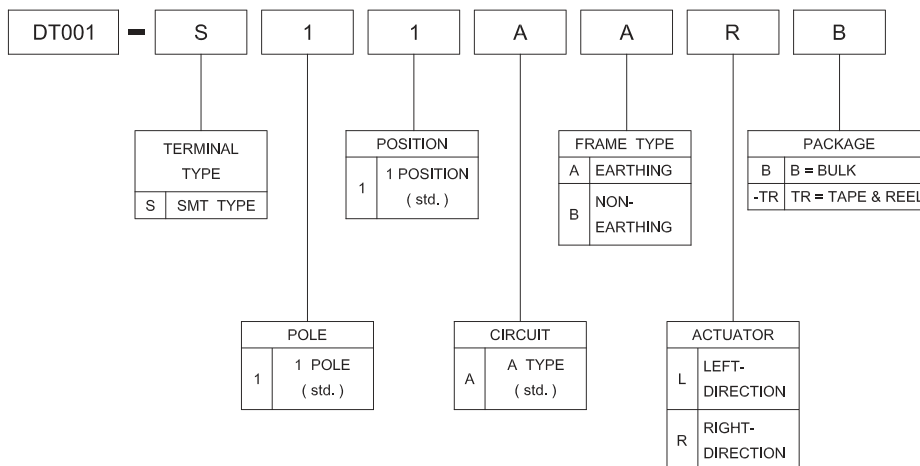


► DIMENSION

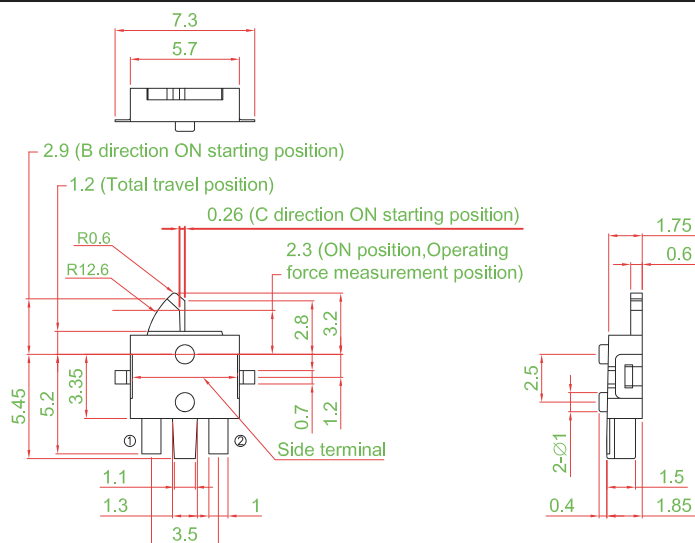


► FRAME TYPE

A TYPE : EARTHING




B TYPE : NON-EARTHING




► ACTUATOR

ACTUATOR : LEFT




ACTUATOR : RIGHT




► P.C.B LAYOUT


FRAME A :



FRAME B :




► REFLOW SOLDERING

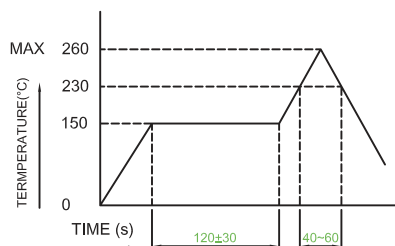


► CIRCUIT

ACTUATOR :
LEFT



ACTUATOR :
RIGHT



► MATERIAL

- COVER : PA
- ACTUATOR : PA
- BASE FRAME : PA
- TERMINAL : SILVER PLATING