



淮 洋 有 限 公 司 HUI YANG CO.,LTD.

TEL : 886-2-8261-8986 FAX : 886-2-8261-1885

www.hy1688.com.tw 236新北市土城區中央路二段191號10樓之5



Feature -

compact size

SMT reflow soldering

Application -


ideal for various

electrical applications

► SPECIFICATIONS


SWITCH SPECIFICATIONS	
POLE - POSITION	Momentary action , 1P1T
CONTACT RATING	5 V DC , 10 mA
CONTACT RESISTANCE	1 Ω MAX. 5 V DC ; 1 A , by Method of Voltage DROP
INSULATION RESISTANCE	100 M Ω MIN. 500 V DC
DIELECTRIC STRENGTH	Breakdown is not Allowable ; 500 V AC for 1 Minute
OPERATING FORCE	30 gf MAX.
OPERATING LIFE	100,000 cycles
OPERATING TEMPERATURE RANGE	-20°C ~ 70°C

► HOW TO ORDER

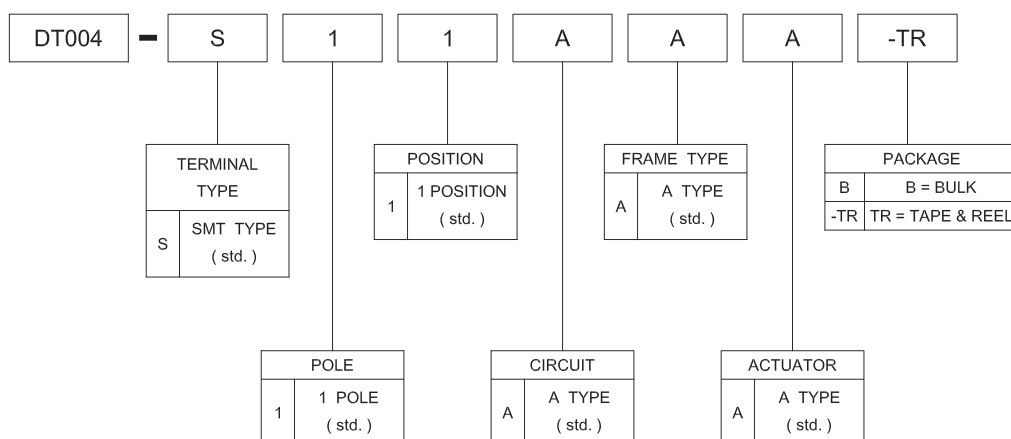


► DIMENSION


DT004-S11AAA □

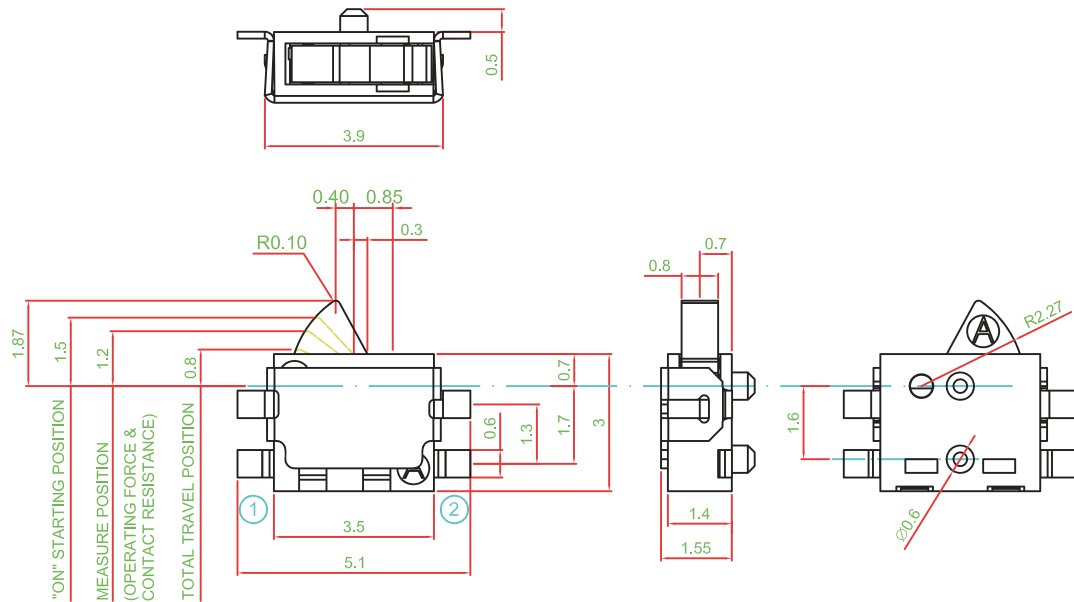


► CIRCUIT DIAGRAM



► P.C.B. LAYOUT

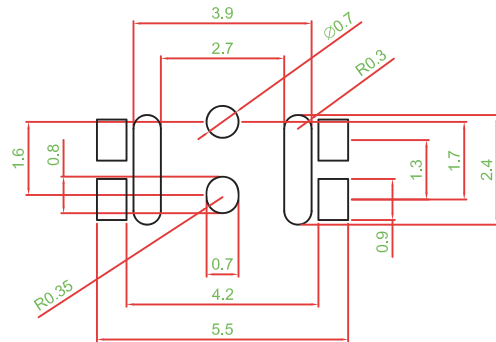

► REFLOW SOLDERING

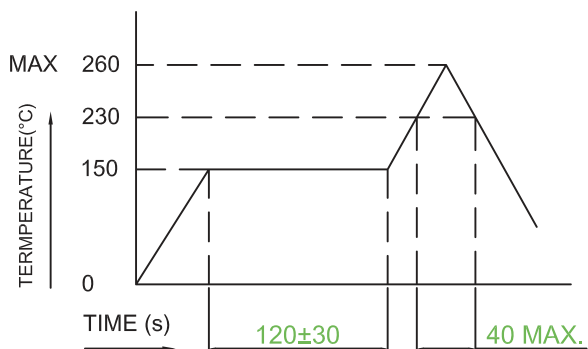

► MATERIAL

- FRAME : LCP + GF
- ACTUATOR : PA + GF
- TERMINAL : SILVER PLATING , GOLD PLATED
- CONTACT : SILVER PLATING , GOLD PLATED