



淮 洋 有 限 公 司 HUI YANG CO.,LTD.

TEL : 886-2-8261-8986 FAX : 886-2-8261-1885

www.hy1688.com.tw 236新北市土城區中央路二段191號10樓之5



Feature -

compact size
SMT reflow soldering


Application -

ideal for various
electrical applications

► SPECIFICATIONS


SWITCH SPECIFICATIONS	
POLE - POSITION	SPST(ON-OFF);DPST(ON-ON)
RATING	VA : 0.2 W V : 24 VDC(MAX.) I : 50 mA(MAX.) ; 10 μ A(MIN.)
CONTACT RESISTANCE	300 m Ω MAX. 1.5 V DC ; 100 mA , by Method of Voltage DROP
INSULATION RESISTANCE	10 M Ω MIN. 100 V DC
DIELECTRIC STRENGTH	Breakdown is not Allowable ; 500 V AC for 1 Minute
OPERATING FORCE	2N ($\approx$ 205 gf) MAX.
OPERATING LIFE	50,000 cycles
OPERATING TEMPERATURE RANGE	-40°C ~ 85°C
TOTAL TRAVEL	1.4+0.2/-0.1 mm

► HOW TO ORDER

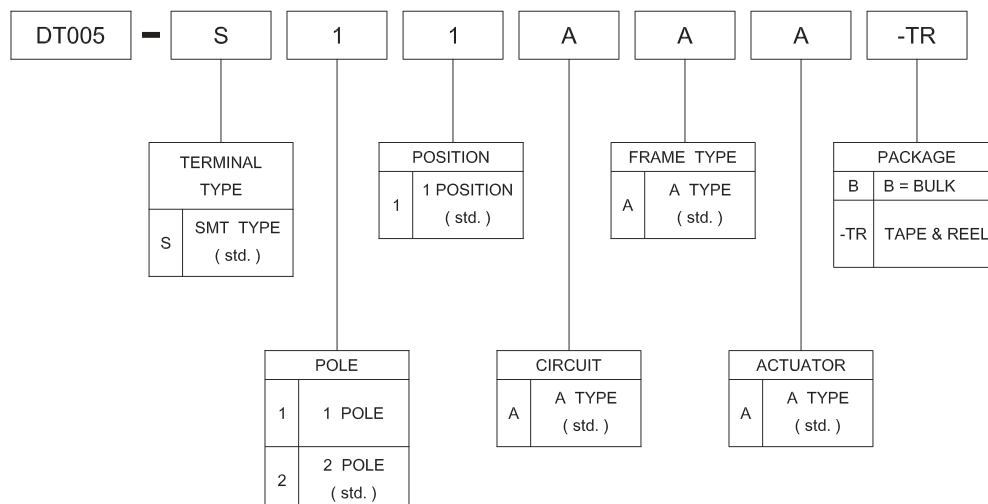


► DIMENSION


DT005-S11AAA □

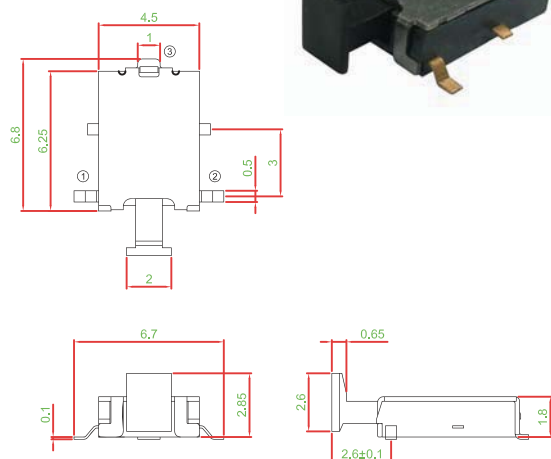

DT005-S21AAA □

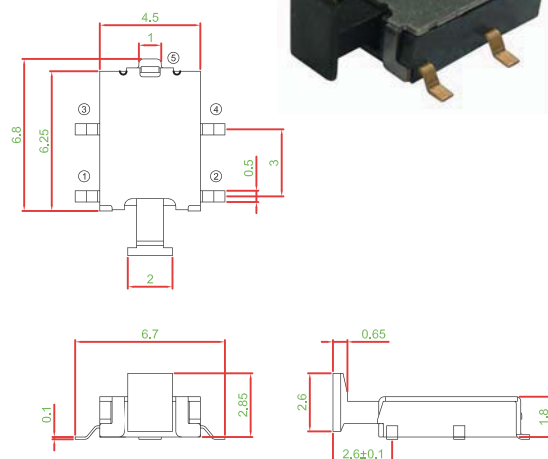


► SCHEMATIC



ON — OFF


DT005-S11AAA □




ON — ON

DT005-S21AAA □

► P.C.B. LAYOUT




DT005-S11AAA □



DT005-S21AAA □

► REFLOW SOLDERING

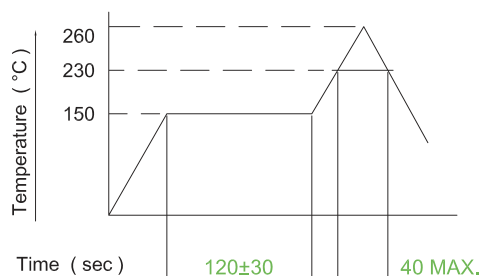

► MATERIAL

- COVER : STAINLESS STEEL,TIN PLATING
- FRAME : LCP + GF
- ACTUATOR : LCP + GF
- TERMINAL : PHOSPHOR BRONZE,GOLD PLATING
- CONTACT : PHOSPHOR BRONZE,GOLD PLATING