


## DW SERIES (IP67)

DIMENSIONS (Unless otherwise specified, a tolerance of  $\pm 0.4$  mm applies to all dimensions.)

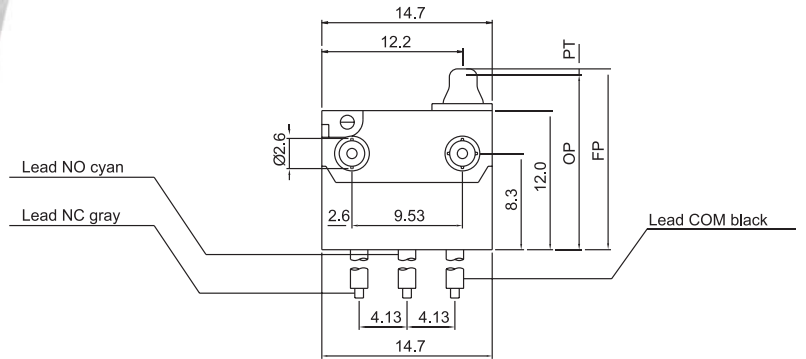

## ORDERING CHARACTERISTICS

<b>DW</b>	<b>N3</b>	<b>S</b>	<b>01</b>	<b>A</b>	<b>0</b>	<b>E</b>	<b>A001</b>	<b>Z</b>								
SERIES PREFIX	CODE	RATING CURRENT	CODE	OPERATING FORCE	CODE	ACTUATOR TYPE	CODE	PILLAR & TRAVEL TYPE	CODE	CIRCUIT ARRANGEMENT	CODE	AWG TYPE	CODE	UL NUMBER	SERIAL CODE	ROHS CODE
	N2	10mA 12VDC Contact Plated Gold and Terminal Plated Silver	S	STANDARD	00		A		0	S.P.D.T	E	20	A	UL1007		
	N3	3A 12VDC 3A 125VAC Terminal Plated Silver and Contact is Silver			01		B		1	S.P.S.T.NO	F	22	C	UL1430		
					04		C		2	S.P.S.T. NC	G	24	D	UL1061		
							D				H	26	E	UL1330		
							E				I	28	F	AV		
							F				J	30				
											K	32				
											L	34				

## CERTIFICATE INFORMATION

SEMKO, VDE 10mA 12 VDC,  $\mu$  5E5, 3A12 VDC,  $\mu$  1E5