



淮洋有限公司 HUI YANG CO.,LTD.

TEL : 886-2-8261-8986 FAX : 886-2-8261-1885

www.hy1688.com.tw 236新北市土城區中央路二段191號10樓之5



Feature -

- small size
- 180 and 190 degrees terminal


Application -

- detection of position mode of mechanism
- small rating power switch, auto car
- slide of digital camera cover
- IC recorder, cassette recorder

► SPECIFICATIONS




SWITCH SPECIFICATIONS	
POLE - POSITION	SPDT
CONTACT RATING	30 V DC , 0.5 A
CONTACT RESISTANCE	100 mΩ MAX. 1.5 V DC ; 100 mA by Method of Voltage DROP
INSULATION RESISTANCE	100 MΩ MIN. 500 V DC
DIELECTRIC STRENGTH	Breakdown is not Allowable ; 500 V AC for 1 Minute
OPERATING FORCE	50 gf MAX.
OPERATING LIFE	100,000 cycles
OPERATING TEMPERATURE RANGE	-20°C ~ 70°C

► HOW TO ORDER



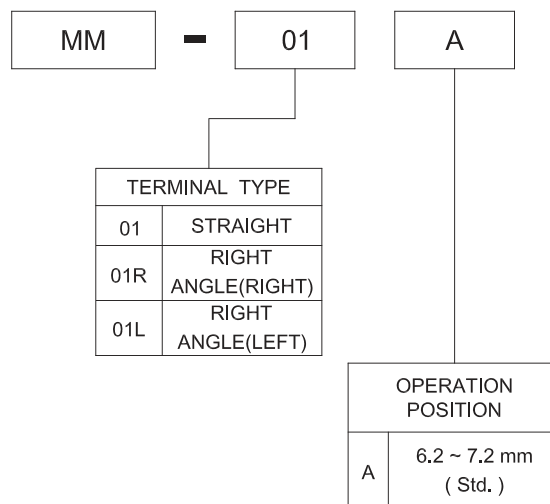


▶ DIMENSION




MM - 01 - A




MM - 01R - A



MM - 01L - A



▶ P.C.B LAYOUT



▶ MATERIAL

■ COVER : POM

■ ACTUATOR : PA

■ BASE FRAME : PA

■ TERMINAL : SILVER PLATING