

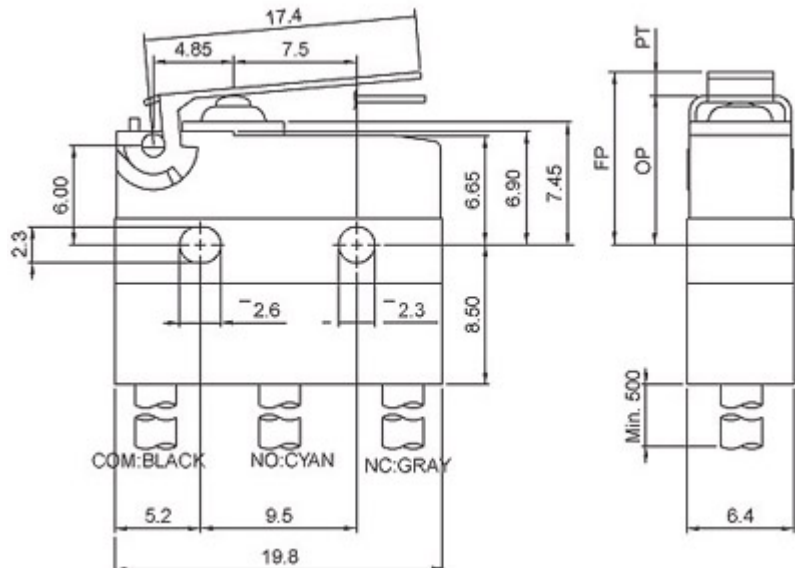
防水型微動開關 / SW-05(IP67) Series



Ratings :
5A 125VAC/250VAC
6A 125VAC/250VAC

Dimension :

Unless otherwise specified, a tolerance of ± 0.4 mm applies to all dimensions.



Features :

Waterproof IP67, Small compact size, Customer designs, Rock wipe contact action, Integral hinge actuator

Operating Frequency (mechanical).....120operations / min

Operating Frequency (electrical).....10~30operations / min

Contact Resistance (initial).....100m (Max.)

Insulation Resistance (at 500VDC).....100M (Min.)

Dielectric Strength (50-60Hz).....AC1,000VRMS

Storage Temperature.....-25~+120

Storage Humidity.....85%RH (Max.)

Service Life (mechanical).....2,000,000operations







Service Life (electrical).....6,000~50,000operations

Application :

Telephont,Aircondition,Computer,Humidifier,Alarm,Timerecorder,

Mixer&choppe, Neonphone, Faxmachine, Joystick, Waterpump, Gasdetector,
Pencilsharpener, Foodprocessor, Electric knife, Toy car, Juicemaker, light, etc.

Operating Characteristics :

| SWITCH TYPE | PART SUFFIX | OF Max. (gf) | OP (mm) | PT Max. (mm) | OT Min. (mm) | MD Max. (mm) | FP Max. (mm) | RF Min. (gf) |
|----------------------|---|--------------|--------------|--------------|--------------|--------------|--------------|--------------|
| SW-06S-00□□-□□□□□□-Z |  | 300 | 8.4 ±0.3 | 1.2 | 0.6 | 0.2 | 9.3 | 70 |
| SW-06S-01□□-□□□□□□-Z |  | 100 | 8.8 ±1.1 | 4.3 | 0.9 | 0.6 | 12.0 | 20 |
| SW-06S-02□□-□□□□□□-Z |  | 90 | 8.8 ±1.2 | 4.6 | 1.0 | 0.7 | 12.4 | 18 |
| SW-06S-03□□-□□□□□□-Z |  | 70 | 8.8 ±1.6 | 6.3 | 1.6 | 0.9 | 13.5 | 14 |
| SW-06S-04□□-□□□□□□-Z |  | 95 | 10.7 ±1.2 | 4.6 | 1.0 | 0.65 | 14.1 | 19 |
| SW-06S-05□□-□□□□□□-Z |  | 100 | 14.5 ±1.1 | 4.3 | 0.9 | 0.6 | 17.7 | 20 |

Ordering Information :

