


Feature :
Mini size
SPST, momentary function

Application :
Hearing aid
Hand-held device




SWITCH SPECIFICATIONS	
POLE - POSITION	Momentary action , SPST
CONTACT RATING	3 V DC , 100 mA
CONTACT RESISTANCE	150 mΩ MAX. 1.5 V DC ; 100 mA , by Method of Voltage DROP
INSULATION RESISTANCE	1 MΩ MIN. 100 V DC
DIELECTRIC STRENGTH	Breakdown is not Allowable ; 100 V AC for 1 Minute
OPERATING FORCE	75 gf ~ 150 gf
OPERATING LIFE	100,000 cycles
TEMPERATURE RANGE	STORAGE TEMP: -40°C ~ 85°C; OPERATING TEMP : -20°C ~ 70°C
TOTAL TRAVEL	0.35 ± 0.1mm

● HOW TO ORDER

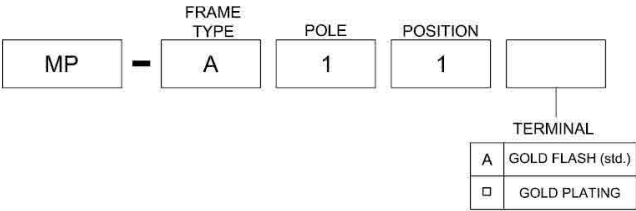

● DIMENSION

• MP-A11A

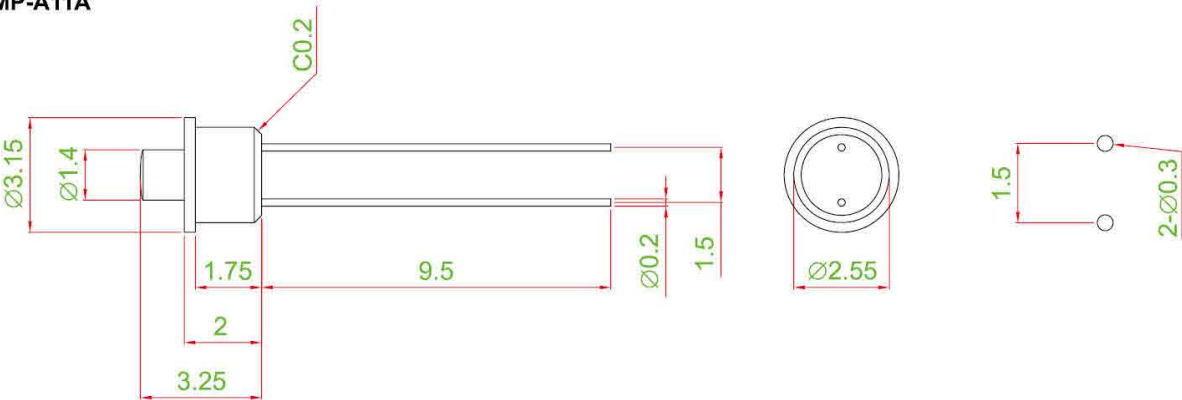

● CIRCUIT

