


Feature :
0.3A, 30 V DC for Power
1 pole & 2 poles circuitry

Application :
Home electronic equipment
Industrial equipments
Audio system
ADSL modem
Wireless AP






SWITCH SPECIFICATIONS	
POLE - POSITION	1P2T , 2P2T , Momentary and Lock Type are Available
CONTACT RATING	30 V DC , 0.3 A
CONTACT RESISTANCE	30 mΩ MAX. 1.5 V DC ; 100 mA , by Method of Voltage DROP
INSULATION RESISTANCE	100 MΩ MIN. 500 V DC
DIELECTRIC STRENGTH	Breakdown is not Allowable ; 500 V DC for 1 Minute
OPERATING FORCE	1P2T : 200 ± 100gf ; 2P2T : 250 ± 100gf
OPERATING LIFE	10,000 cycles
OPERATING TEMPERATURE RANGE	-40°C ~ 85°C
TOTAL TRAVEL	3.5 ± 0.3 mm

● HOW TO ORDER



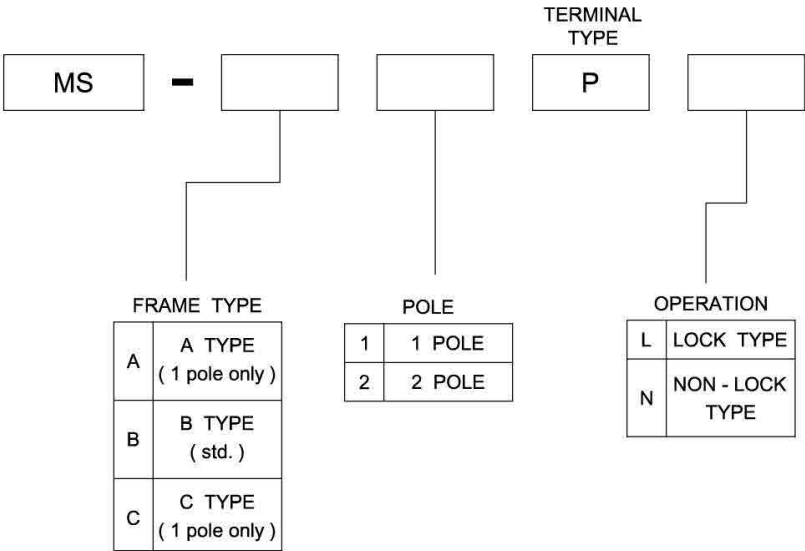


DIMENSION




• MS-A1PL






• MS-B1PN

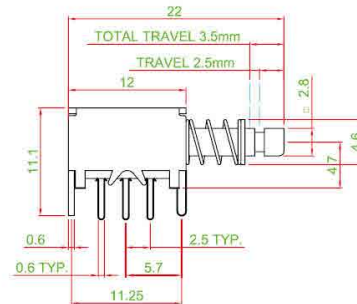

• MS-C1PN

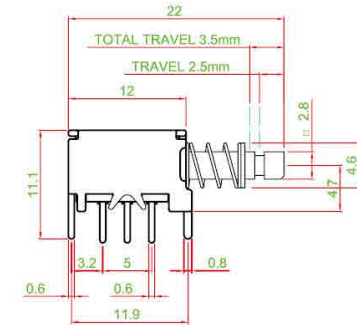

• MS-B2PL

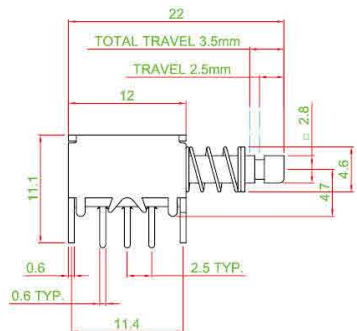

CIRCUIT

1 POLE



2 POLE

