


Feature :
Multiple keys and poles
Momentary and Lock function

Application :
Various switching purpose
Home electronic equipments
Industrial electronic equipments




SWITCH SPECIFICATIONS	
POLE - POSITION	2P2T , 4P2T , 6P2T , Momentary and Lock Type are Available
CONTACT RATING	30 V DC , 0.1 A
CONTACT RESISTANCE	40 mΩ MAX. 1.5 V DC ; 100 mA , by Method of Voltage DROP
INSULATION RESISTANCE	100 MΩ MIN. 500 V DC
DIELECTRIC STRENGTH	Breakdown is not Allowable ; 500 V AC for 1 Minute
OPERATING FORCE	250 ± 150gf
OPERATING LIFE	10,000 cycles
OPERATING TEMPERATURE RANGE	-40°C ~ 85°C
TOTAL TRAVEL	TRAVEL : 1.5 ± 0.3mm ; TOTAL TRAVEL : 3.0 ± 0.3mm

● HOW TO ORDER

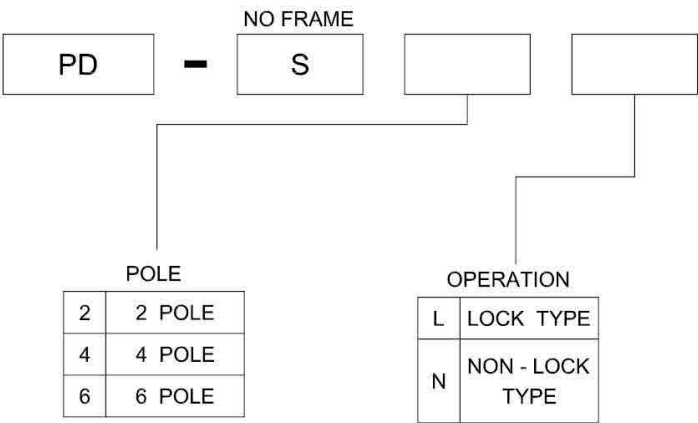


DIMENSION


• PD-S2L

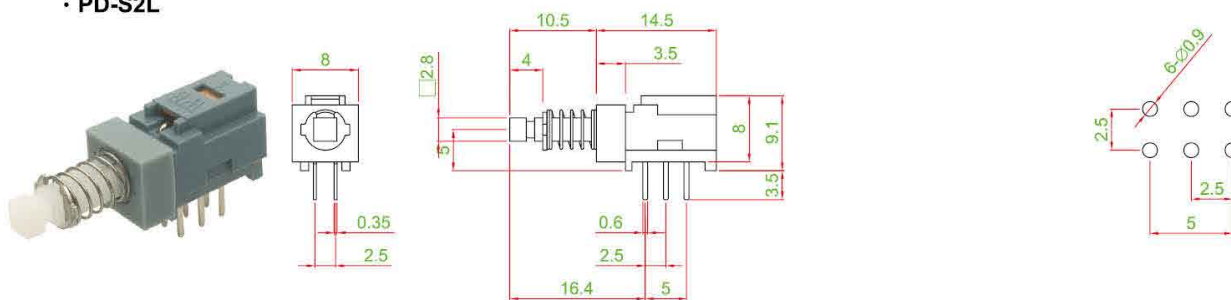

• PD-S4L

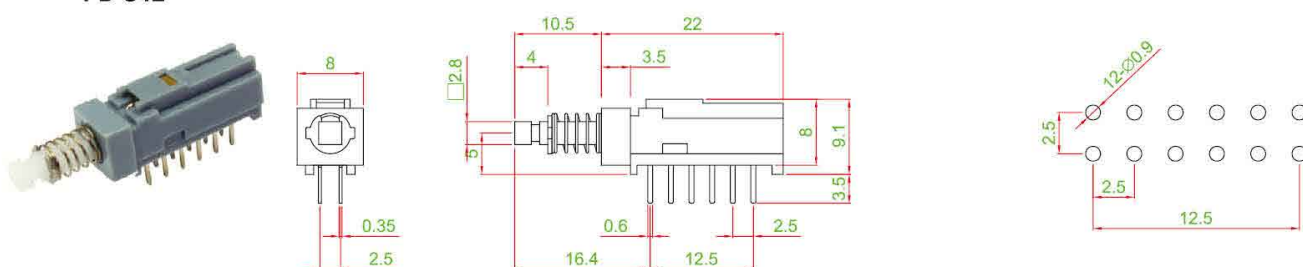


• PD-S6L

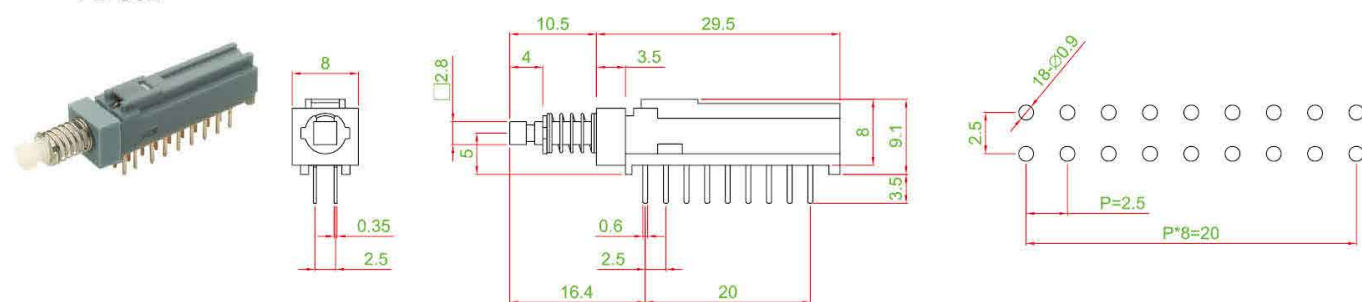


CIRCUIT

2 POLE



4 POLE



6 POLE

